Technical Data

STK SERIES CONNECTOR


www.rfconnector.in

QUALITY PRODUCT of INDIA

Nomenclature: CONN 750HM MCX ST PLUG CRIMP

STK-571521901238	CONN 750HM MCX ST PLUG CRIMP

OUTLINE DRAWING

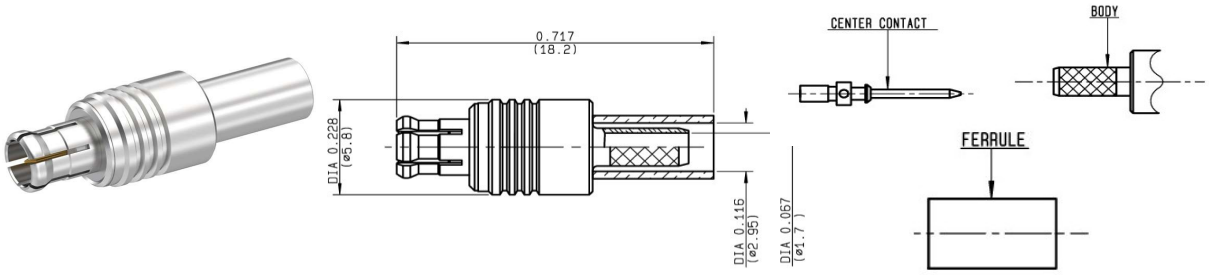

TECHNICAL DATA

ELECTRICAL DATA

Impedance	75 Ω
Frequency Range (GHz)	0-6 Ghz
Dielectric Withstanding Voltage (V)	750 veff maxi
VSWR	1.05 + 0.2 x F (Ghz)
Insertion Loss(dB, f/GHz)	0.06 F (Ghz) db Max
Insulation Resistance (MΩ)	100 MΩ Mini

MECHANICAL INFORMATION

Mechanical Durability	500 Cycles
Weight	1.4 gr

ENVIRONMENTAL

CABLE Rentention	53 N Mini
Axial force-mating	10 N Mini
Axial force-opposite end	10 N Mini

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Centre contact	BRASS	GOLD 1.3 OVER NICKEL 2
Outer contact	BERYLLIUM COPPER	BBR 2
OTHER PIECES	BRASS	BBR 2
Body	BRASS	BBR 2
Insulator	PFA / PTFE	

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.11.25	Krishnamurthy	-	0	-	-	-
				-	-	-	-
				-	-	-	-

Synergy Telecom P Ltd,
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in