



Technical Data	STK SERIES ANTENNA	
----------------	--------------------	---

Nomenclature: CONN RF50 SMP INSERT AD FE-FE L18.82	Page No. 1 of 1
--	--------------------

STK-571623721265	CONN RF50 SMP INSERT AD FE-FE L18.82
OUTLINE DRAWING	

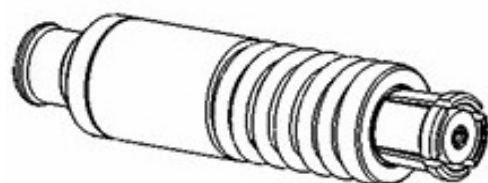

Unslotted side :
To be mated to
SMOOTH BORE
only



Slotted side :
To be mated to
FULL or
LIMITED DETENT

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	Maxi
Insertion loss	0.12 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

MECHANICAL INFORMATION

Axial force – Mating end	6.7 N mini
Axial force – Opposite end	6.7 N mini
Torque	NA N.cm mini
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	1000 Cycles mini
Weight	1,3000 g

DIMENSION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRONZE	NPGR
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
INSULATOR	PTFE + PEI	
GASKET	ALUMINIUM ALLOY	
SPRING		PASSIVATED
OUTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	30.10.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in			

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in