


|                       |                           |                                                                                     |
|-----------------------|---------------------------|-------------------------------------------------------------------------------------|
| <b>Technical Data</b> | <b>STK SERIES ANTENNA</b> |  |
|-----------------------|---------------------------|-------------------------------------------------------------------------------------|

|                                                |                 |
|------------------------------------------------|-----------------|
| <b>Nomenclature: ANTENNA 3PORT 50 Ohm Sdbi</b> | <b>Page No.</b> |
|                                                | <b>1 of 1</b>   |

|                         |                             |
|-------------------------|-----------------------------|
| <b>STK-587822701283</b> | <b>CELLULAR GPS ANTENNA</b> |
|-------------------------|-----------------------------|

## OUTLINE DRAWING

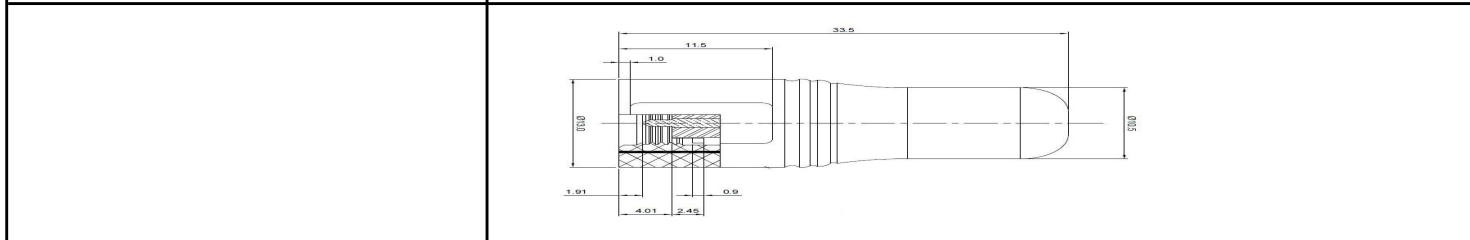

## TECHNICAL DATA

### ELECTRICAL DATA

|                              |                       |
|------------------------------|-----------------------|
| Frequency (MHz)              | GPS L1 (1575.42) MHZ  |
| NOMINAL IMPEDANCE            | 50 $\Omega$           |
| VSWR                         | 2.5:1 MAX             |
| GAIN                         | 25 DB MIN             |
| CURRENT CONSUMPTION          | 23 mA TYP.            |
| CONNECTOR TYPE               | MALE SMA              |
| RADIATING ELEMENT ONLY       | (-) 7 DBIC $\pm$ 1 DB |
| ACTIVE GAIN (LNA)            | 35 DB MIN             |
| POLARIZATION                 | RHCP                  |
| RADIATION PATTERN            | HEMI-SPHERICAL        |
| 3 DB BEAMWIDTH (BOTH PLANES) | 120° X 120°           |
| P1 DB COMPRESSION            | (-12 DBM)             |
| NOISE FIGURE (LNA)           | <1.7 DB               |
| POLARIZATION                 | RHCP                  |
| RADIATION PATTERN            | HEMI-SPHERICAL        |
| 3 DB BEAMWIDTH (BOTH PLANES) | 120° X 120°           |

### MECHANICAL INFORMATION

|                |                    |
|----------------|--------------------|
| PLASTIC RADOME | PEI                |
| WEIGHT         | 20 g               |
| TEXTURE        | CHARMILLE 27 TO 30 |
| COLOR          | BLACK              |
| OVERALL LENGTH | 33.5 mm            |
| PLASTIC RADOME | PEI                |

| Originated                                                     | Date     | Approved      | Date | Rev | Amend | Name | Date |                                                                                       |
|----------------------------------------------------------------|----------|---------------|------|-----|-------|------|------|---------------------------------------------------------------------------------------|
| Sang                                                           | 11.10.25 | Krishnamurthy | -    | 0   | -     | -    | -    |  |
| Synergy Telecom P Ltd,                                         |          |               |      | -   | -     | -    | -    | Email: sales.blr@rfconnector.in                                                       |
| WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India |          |               |      | -   | -     | -    | -    |                                                                                       |

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

[www.rfconnector.in](http://www.rfconnector.in)