




Product Datasheet

MODEL NO.	SMA/N-KKSY -4	RF COAXIAL ADAPTER
DESCRIPTION	SMA female to N female Bulkhead Adapter	

Outline Drawing

Unit (mm)

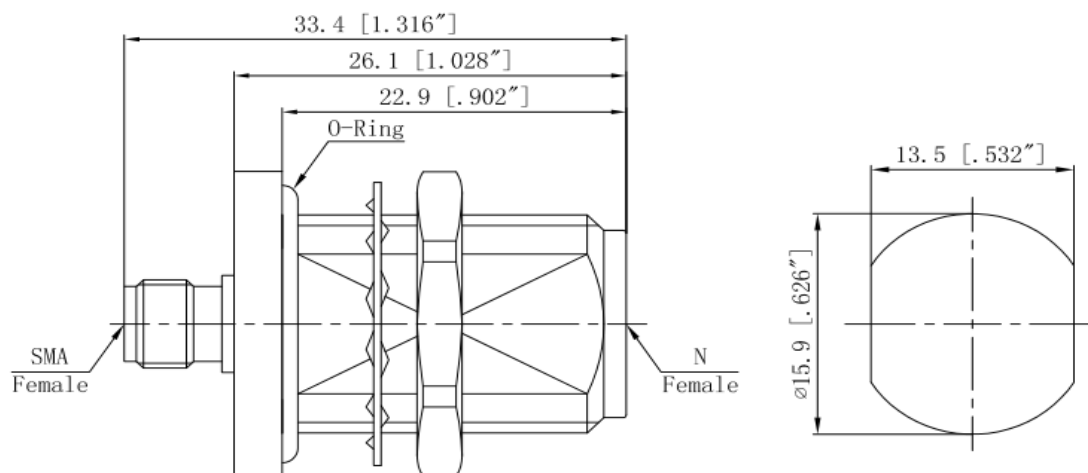

Performance and Specification

Standard and Spec.: GJB 681A-2002, GJB360B-2009

Item	Spec.	Item	Spec.
Impedance	50Ω	Frequency	DC~18GHz
Insulation Resistance	≥5000MΩ	VSWR	≤1.20:1
Dielectric Withstand Voltage	1000V	Durability	500 Cycles
Temperature	-55℃~+165℃	-	-

Material and Finish

Others

	Material	Finish	Our company can customize any product as required (connector type and length). Website: www.rfconnector.in/
Center Contact	BeCu	Gold	
Dielectric	PTFE	-	
Body	Stainless Steel	Passivated	

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN