




COAXIAL FIXED TERMINATION

Model TF3000 Oil-cooled 3000 Watts DC-2GHz

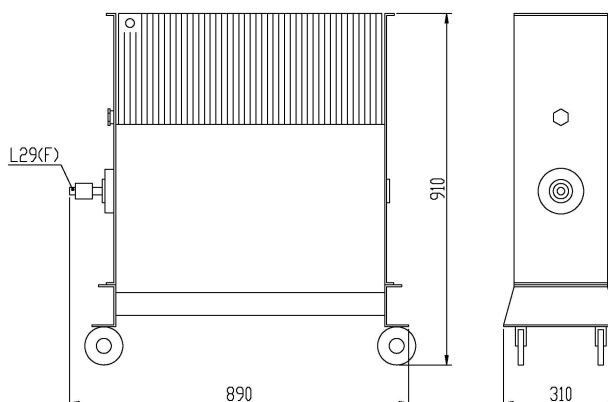

Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

TF serial oil-cooled high power coaxial fixed termination's average power from 1KW-10KW, frequency range from DC-2GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	PhosphorCopper Gold Plated
Housing	Aluminum, Gray Powder Coat
Temp Range	-40° C ~ +45° C
Dimensions	890×310×910mm
Weight	80Kg

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range (MHz)	Max VSWR
TF3000-2	DC-30	1.10
	30-88	1.15
	88-700	1.25
	700-2000	1.30

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 3000W

PEAK POWER: 50KW (5μs pulse width with 6% duty cycle)

COOLING METHOD: oil-cooled+ forced draft

CONNECTOR TYPE: N,L29

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN