




DDS to RF 6G Board Specification V01

Product Features

1. Baseband signal range: 20 MHz to 1100 MHz. The built-in mixer can output 20 MHz to 6000 MHz.
2. Configurable sweep bandwidth. The maximum output bandwidth is 500 MHz, and up to 4 sub-bands can be output.
3. Output power: 0 dBm $\pm$ 3 dB.
4. Configurable dwell time and sweep interval. Minimum dwell time: 1 ns. Minimum sweep interval: 1 kHz.
5. Output power adjustment range: 20 dB, with 1 dB steps.
6. Supports ASK, FSK, and PSK modulated signals. Complex modulation signals can be customized.

Product Photo

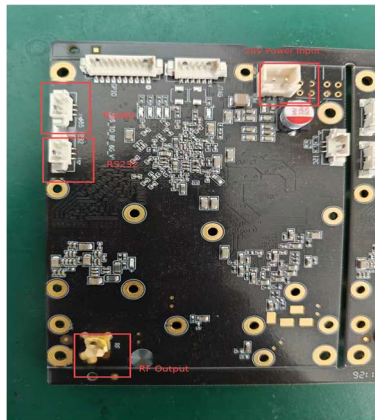

Hardware Parameters

1. DC 28 V / 1 A power input, XH2.54 2-pin connector.
2. RF interface: MCX.
3. 1 $\times$ RS485 interface, 1.25 mm pitch, 3-pin. Parameters are configured through a serial-port assistant.
4. 1 $\times$ RS232 interface, 1.25 mm pitch, 3-pin.

Mechanical Dimensions

Size: 80 mm $\times$ 65 mm