
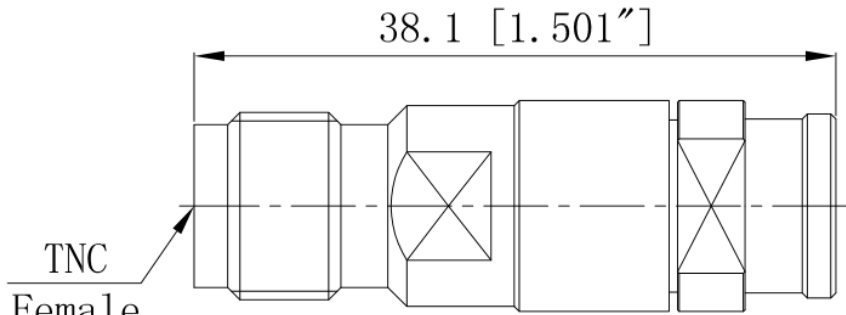


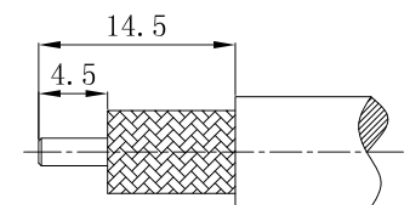

Product Datasheet

MODEL NO.	ST-K-ZLB780G		RF COAXIAL CONNECTOR	
DESCRIPTION	TNC female connector to ZLB780 cable			
Outline Drawing			Unit (mm)	
				
			RECOMMENDED CABLE STRIPPING DIM'S	
Performance and Specification				
Standard and Spec.: GJB 681A-2002,GJB360B-2009				
Item	Spec.		Item	Spec.
Impedance	50Ω		Frequency	DC~18GHz
Insulation Resistance	≥5000MΩ		VSWR	≤1.30:1
Dielectric Withstand Voltage	1000V		Durability	500 cycles
Temperature	-55℃~+165℃		-	-
Material and Finish			Others	
	Material	Finish	Our company can customize any product as required (connector type and length). Website: rfconnector.in/	
Center Contact	BeCu	Gold		
Dielectric	PTFE	-		
Body	Stainless Steel	Passivated		