



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONNECTOR RF50 SMARP SQFLJK ST TAS CONT




Page No.

1 of 1

STK-571127971240

CONNECTOR RF50 SMARP SQFLJK ST TAS CONT

OUTLINE DRAWING

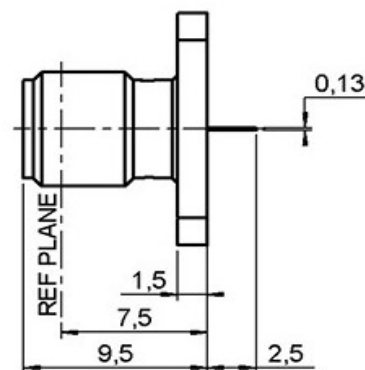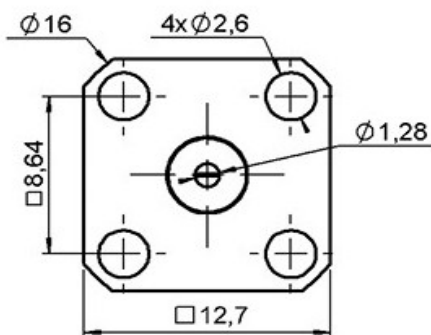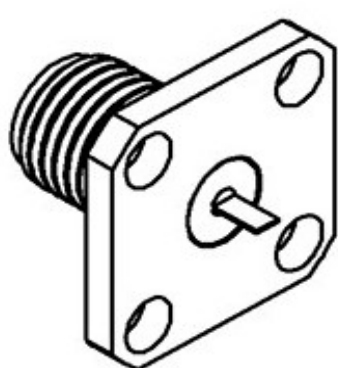

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	$1.06 + 0.002 \times F(\text{GHz})$ Maxi
Insertion loss	$0.07 \times \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (60 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric with standing voltage	1000 Veff mini
Insulation resistance	5000 M Ω mini

MECHANICAL INFORMATION

Axial force – Mating end	27 Nmini
Axial force – Opposite end	27 Nmini
Torque	2.8 N.cm mini
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	2.550 g

ENVIRONMENTAL

Operating temperature	-65/+165 ° C							
Hermetic seal	NA Atm.cm3/s							
Panel leakage	NA							
DIMENSIONS								
COMPONENTS	MATERIALS	PLATINGS (mm)	 Synergy Telecom Pvt Ltd Defence & Aerospace Division					
BODY	STAINLESS STEEL	GOLD 0.5 OVER NICKEL 2						
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2						
OUTER CONTACT	-	-						
INSULATOR	PTFE	-						
GASKET	-	-						
OTHERS PARTS	-	-						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd, WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
				-	-	-	-	Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division . This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								