


OUTLINE DRAWING

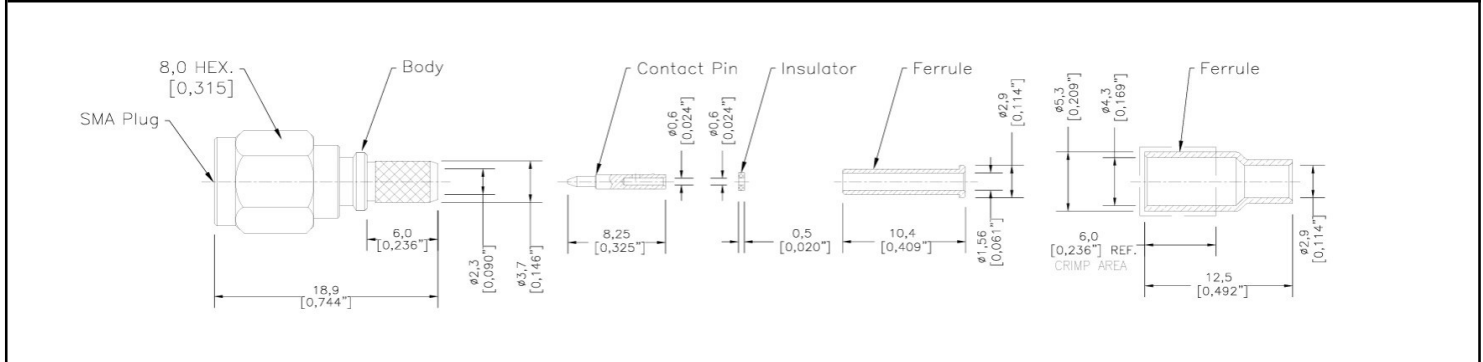

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω	
Frequency Range (GHz)	DC to 6 GHz	
Dielectric Withstanding Voltage (V)	500	
VSWR	≤1.2(0-3GHz) / ≤1.3(3-6GHz)	
Insertion Loss(dB, f/GHz)	-0.1x f	
Insulation Resistance (MΩ)	≥5000	

MECHANICAL INFORMATION

Centre contact	Solder	
Outer contact	Crimped	
Coupling Nut Torque (in.lbs)	7-10	
Cbl-Connector Retention Force (lbs):	20	
Durability (cycles)	500	

ENVIRONMENTAL

Operating temperature	-40°C~+125°C	
-----------------------	--------------	--

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
Centre contact	BRASS	Gold Plating (Nickel underplated)
Outer contact	BRASS	SUCOPLATE (R) Plating
Body	BRASS	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	

Coupling nut	BRASS	SUCOPLATE (R) Plating
Crimp ferrule	COPPER	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.11.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
Email: sales.blr@rfconnector.in								

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in