




100W Module Technical Datasheet

1.RF DATA

Item		Spec.	Remarks
Frequency Range		6700-6900MHz	Bandwidth Range±10MHz
Working Voltage		28V	24-30V
Analog sweeping speed		120K	50 50KHz-300Kcustomiz able
Output Power (Max)		≥50 dBm	100W
Gain (Max)		50±1 dB	
Ripple in Band		≤ 3 dB	Peak
Bandwidth adjustment		Yes	By screw
Center adjustment		Yes	By screw
Enable control		Customize	3-28V
EN switch frequency		10000 times	Switching time interval ≥ 3S
temperature protection		Turn off the amplifier at 100 °C	
Output VSWR		≤2	
High Low Temperature test	Working Temperature	-30~+85°C	Working properly
	Gain Stability	±1 dB	at -20°C~+55°C
	Power stability	±1 dB	at -20°C~+55°C
Working current		≤10A @+28V dc;	output 100W
Power supply Port		Positive and negative lines	24-28V; GND
Assembly execution standard		IPC-A-610 Class 1	
Design execution standard		ST 20668-1998	
RF output connector		N-Female	
Green LED indicator light		CD Power ON/OFF	When the power supply voltage is normal, it lights up, and when the power is turned off, it turns off
Blue LED indicator light		RF Power ON/OFF	Turn off when the output power is less than 5-10dBm, and turn on when the output power is normal

Plot no. 845, DSIIDC Industrial Area KHASRA NO. 33/23 (0-7) & 37/4 (0-10) Gali no. 6, near Harnandi dharam kanta
Mundka Industrial Area, New Delhi, Delhi, 110041

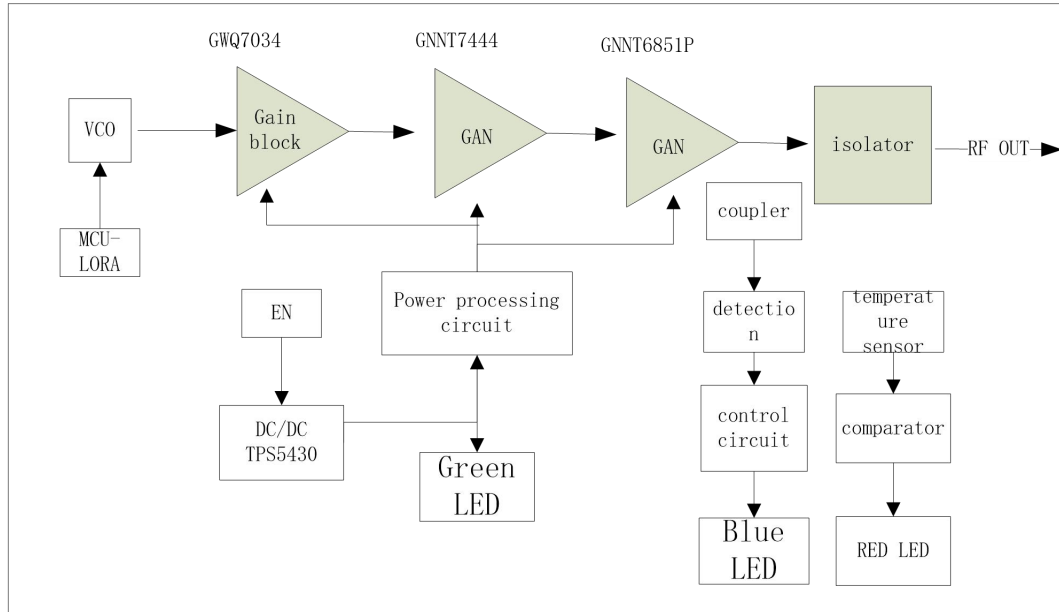

7、Internal product images

