




100W Module Technical Datasheet

1.RF DATA

Item		Spec.	Remarks
Frequency Range		300-2400 MHz	
Working Voltage		32V	--
Output Power (Max)		≥50 dBm	100W
Gain (Max)		53±5 dB	
Ripple in Band		≤ 10dB	Peak
Enable control		Customize	5V
temperature protection		Turn off the amplifier at 80 °C	
Input VSWR		≤1.8	
Output VSWR		≤3	
High Low Temperature test	Working Temperature	-20~+85℃	Working properly
	Gain Stability	±1 dB	at -20℃~+55℃
	Power stability	±1 dB	at -20℃~+55℃
Working current		≤12A @+32V dc;	CW output 100W
Power supply Port		7W2	32V; GND
Monitor Port		7W2	Enable control
			temperature alarm
			VSWR index
LED indicator light		Power ON/OFF	
Dimension		158*122*25 mm	
Installation Dimension		152.5*116.5*26 mm	
Screw Size		4-Ø3.20 mm	
Weight		1090g	



2. Size

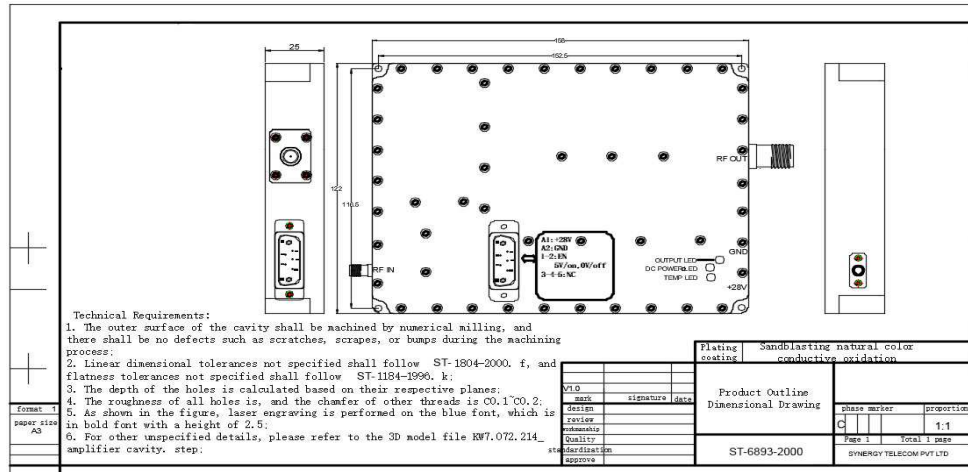

3. The red box indicates the location of the low-level amplification tube, which is the main heating area with a heat generation of approximately 150-200W;
4. The cavity uses copper blocks for heat conduction, evenly transferring heat to the aluminum cavity;
5. Note that when the red LED lights up, check if there are any issues with the heat dissipation, if the screws securing the PA are tightened, and if the PA and heat sink are coated with heat dissipation silicone grease

6. Sample test data

300-3000M						
	(dBm)	(dBm)	(A)		(dBm)	(A)
300M	0	50.3	7.4	1700M	-5	50.5
350M	0	49.4	4	1750M	-5	50.8
400M	-2	49.7	6.2	1800M	-5	50.3
450M	0	50.4	8.2	1850M	-2	50.7
500M	5	49.6	7.7	1900M	1	50.4
550M	3	50.7	9.4	1950M	6	50.3
600M	0	50.8	9.3	2000M	2	50.8
650M	0	50.3	7.4	2050M	0	50.3
700M	-1	49.6	7.5	2100M	-2	50.8
750M	-1	49.5	7.8	2150M	-2	51
800M	2	49.3	6.9	2200M	1	50.2
850M	3	49.5	8.2	2250M	5	50.1
900M	5	49	10	2300M	5	49.1
950M	5	50.2	13.3	2350M	7	49.8
1000M	1	50.3	12.5	2400M	5	50.3
1050M	-2	50.4	12.2	2450M	1	50.6
1100M	-2	50.5	9.3	2500M	-1	50.6
1150M	3	50.1	8.3	2550M	0	50.3
1200M	2	50.3	8.9	2600M	3	50.1
1250M	1	50.1	11.3	2650M	5	49.5
1300M	5	50.3	12	2700M	3	50.5
1350M	3	50.3	12.4	2750M	0	50.8
1400M	-3	50.4	11.2	2800M	1	50.3
1450M	-4	50.8	50.8	2850M	5	49.5
1500M	-4	50.5	13	2900M	5	48.5
1550M	-3	50.6	11.3	2950M	5	48.7
1600M	-4	50.5	10.5	3000M	5	49.5
1650M	-2	50.5	12.1			