


No.	Objects	Material	Plating
1	Contact (pin)	Copper alloy (stamped)	Ni2 Au3u"
2	Dust cover	PE (translucent)	/
3	Plug housing	Zinc alloy HPb59-1	Nickel-plated
4	Connect nut	Copper alloy HPb59-1	Nickel Ni2um
5	Snap ring	Stainless steel	Passivation
6	Insulator	PA66 (UL-certified and UL 94-V0 flame-retardant), black	/
7	Cable clip	Zinc alloy	Nickel-plated
8	Clamping plate	Copper alloy HPb59-1	Nickel-plated
9	Tail sleeve	Copper alloy HPb59-1	Ni2um
10	Plat washers	Stainless steel	/
11	Rubber pad	Silicone rubber black	/
12	Tail nut	Nylon PA66 black	/
13	O-ring	Silicone black	/
14	Screws	Iron	Nickel-plated

1、APPEARANCE、CONSTRUCTION、DIMENSION Appearance

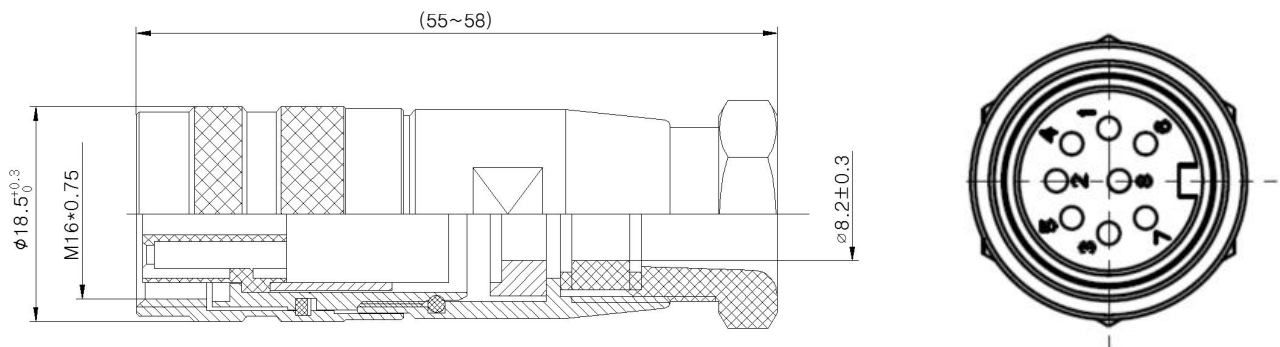

2、Physical photograph



Figure 1 Parts Real pictures

				
Dust cover	Plug insulator	Connecting nut assembly	Cable clip	Clamping plate
				
M2*6 screws (2个)	Connecting sleeve	Plat washers (2pcs)	Rubber pad	Tail nut
				
The connecting sleeve equipped with black Color O-ring	Terminal	Rubber ring		

5. Packing requirements

The blister packs with 45 units each, which remaining each pack is filled with the required number of loose parts for that pack, ensuring that there are no loose parts are not crushed or deformed during packing and shipping.

The individual parts including screws and clamping plates are packaged in single resealable bags, the bags must be labeled with the part number, name, batch number, and quantity of the part. Each box of screws includes an additional 5 spare screws. An example blister pack shown below:




Product Compatibility Guide

When assembling the kit, please use the following quantities of parts to create a complete set. Once assembly is complete, please keep this instruction sheet inside the packaging box for future reference.


	1
	1
	2
	4000/pack , matched according to connector requirements

Attachments 2


Female connecting nut assembly

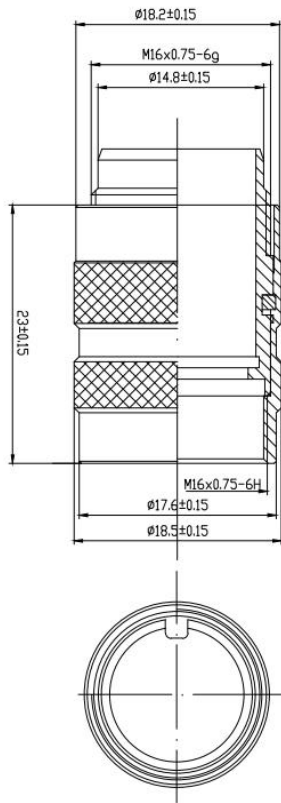


Tail assembly

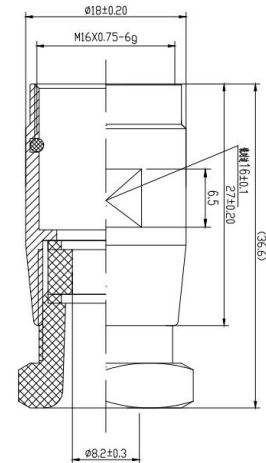


AISG female insulator:

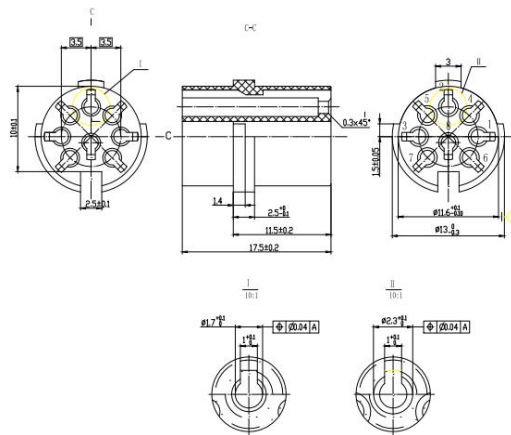

Socket


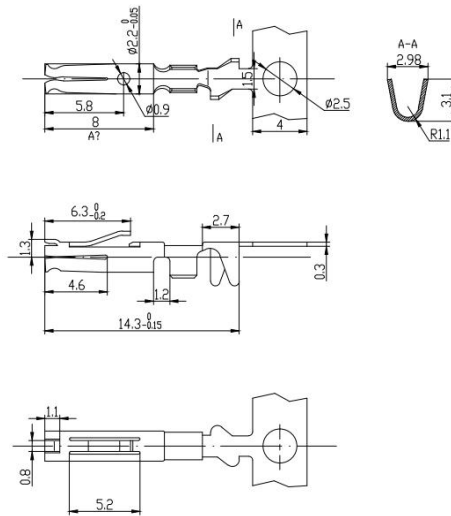


Dust cover

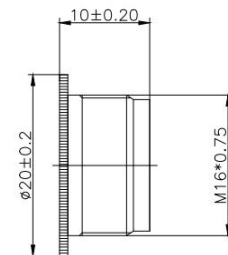


Clamping plat:

Cable clip:

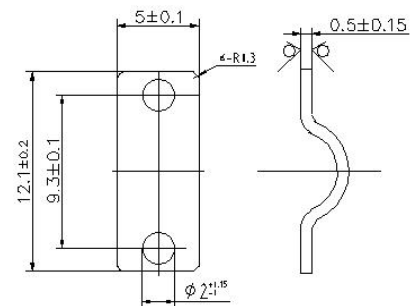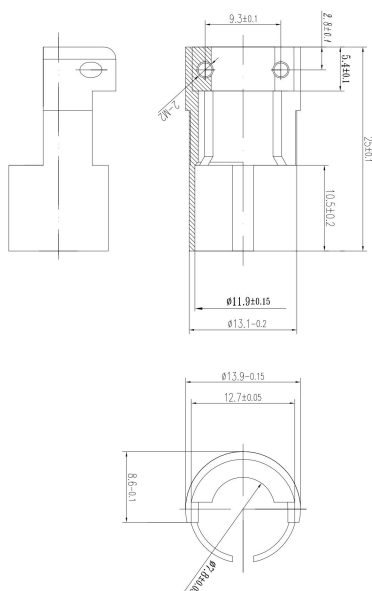

Screws:

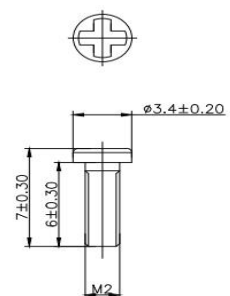



- ELECTRICAL CHARACTERISTICS

- 1、 Voltage Standing Wave Ratio : N/A
- 2、 Withstanding Voltage : 650V
- 3、 Contact Resistance : < 5mΩ
- 4、 Insulator Resistance : 500MΩ
- 5、 Rated voltage : 300V

- MECHANICAL CHARACTERISTICS

- 1、 Engagement Forces : 6PIN-45N max ;
- 2、 Disengagement Forces : 6PIN-45N max ;
- 3、 Contact Retention : 6 lbs Min
- 4、 Coupling Nut Retention : 80 lbs (350 N) Min
- 5、 Coupling Proof Torque : 10 lbs-in Min
- 6、 IP-degree : IP68

- Environmental requirements

1. Temperature range : -40°C +85°C (IEC 60068-1) ;
2. Flammability : UL94-V0.