



No.	Objects	Material	Plating
1	Contact (pin)	C5191(stamped)	Ni2 Au3u"
2	Dust cover	PE (translucent)	/
3	Plug housing	Zinc alloy	Nickel-plated
4	Connect nut	HPb59-1	Ni2um
5	Snap ring	Stainless steel	Passivation
6	Insulator	PBT black	/
7	Cable clip	Zinc alloy	Nickel-plated
8	Clamping plate	H62	Nickel-plated
9	Tail sleeve	HPb59-1	Ni2um
10	Plat washer	Stainless steel	/
11	Rubber pad	Silicone rubber black	/
12	Tail nut	Nylon PA66 black	/
13	O-ring	Silicone rubber black	/
14	Screws	Iron	Nickel-plated

1、APPEARANCE、CONSTRUCTION、DIMENSION

Appearance :

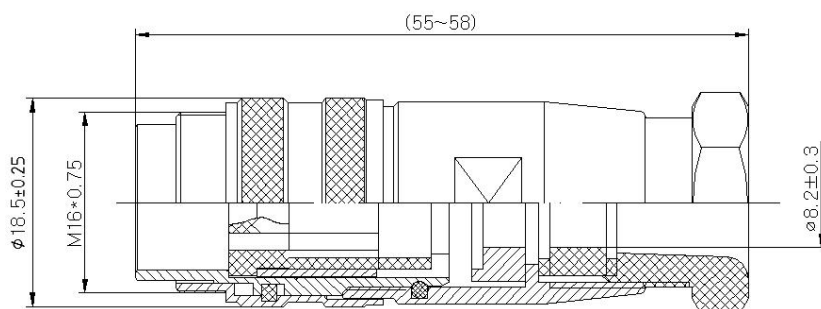

2、Physical photograph






				
Dust cover	Plug insulator	Male Connector and Nut Assembly	Cable clip	Clamping plate
				
M2*6 screws (2个)	Connecting sleeve	Plat washers(2pcs)	Rubber pad	Tail nut
				
The connecting sleeve equipped with black Color O-ring	Male terminal			

5. Packing requirement:

The blister packs with 45 units each, which remaining each pack is filled with the required number of loose parts for that pack, ensuring that there are no loose parts are not crushed or deformed during packing and shipping.


The individual parts including screws and clamping plates are packaged in single resealable bags, the bags must be labeled with the part number, name, batch number, and quantity of the part. Each box of screws includes an additional 5 spare screws. An example blister pack shown below:

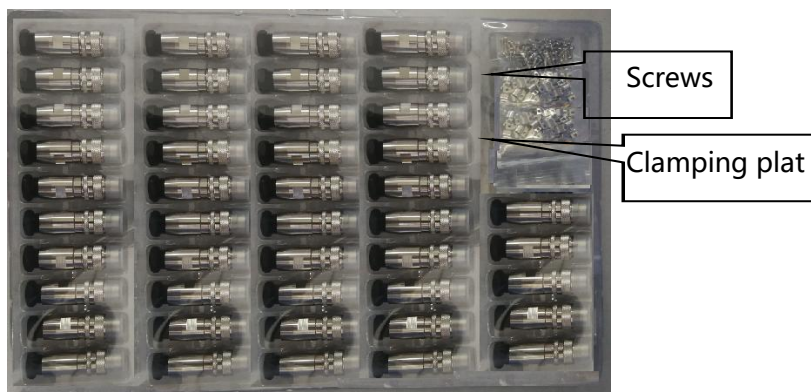

Attachments 1


Product Compatibility Guide

When assembling the kit, please use the following quantities of parts to create a complete set. Once assembly is complete, please keep this instruction sheet inside the packaging box for future reference.

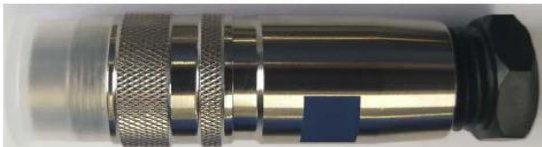
	1
	1
	2

	4000/pack, matched according to connector requirements
---	--


Attachments 2 Male Connector and Nut Assembly

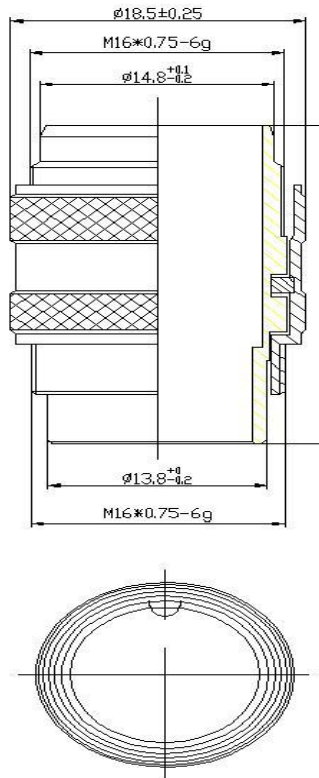


Tail Assembly

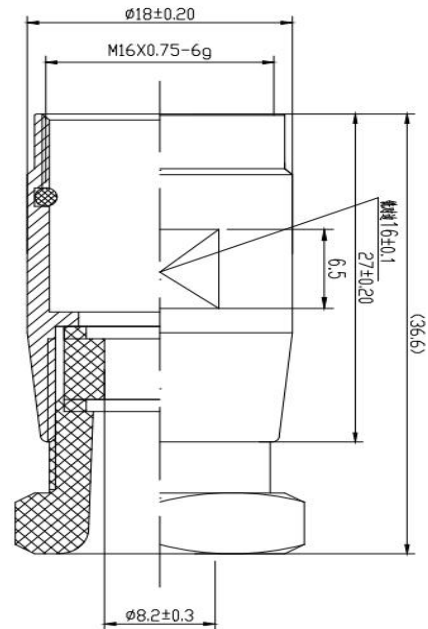


AISG Male Insulator :

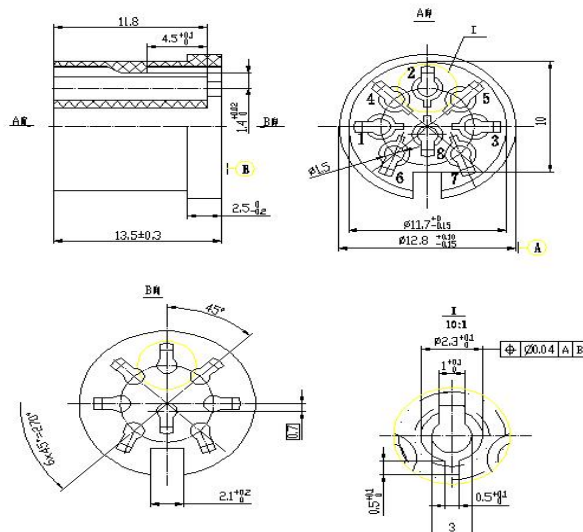


Pin Insertion

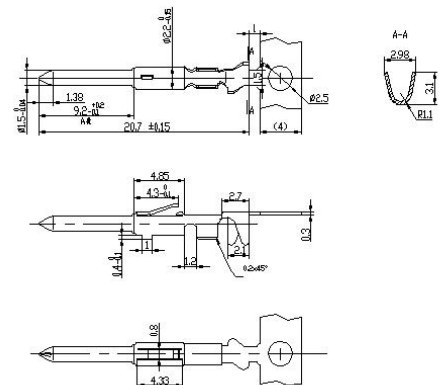


Dust cover:

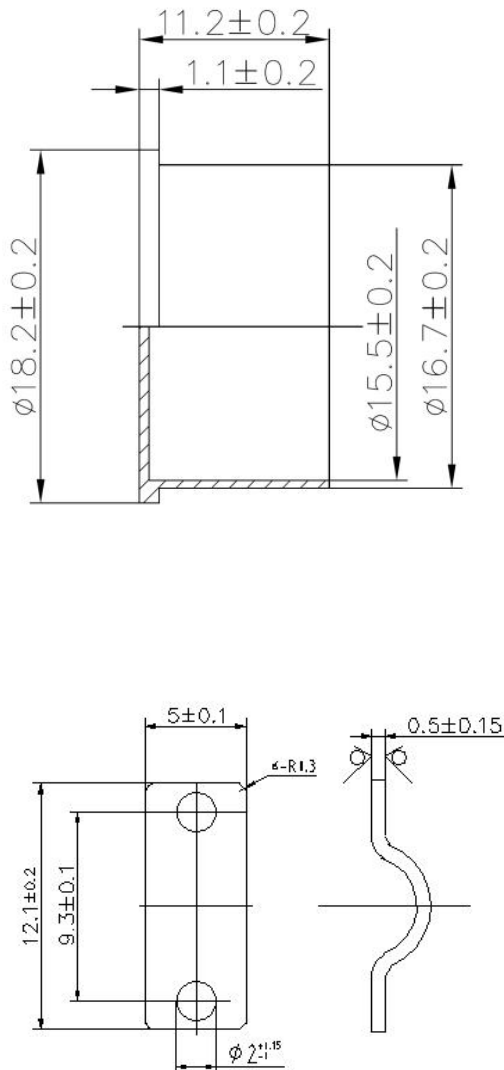

Cable clip

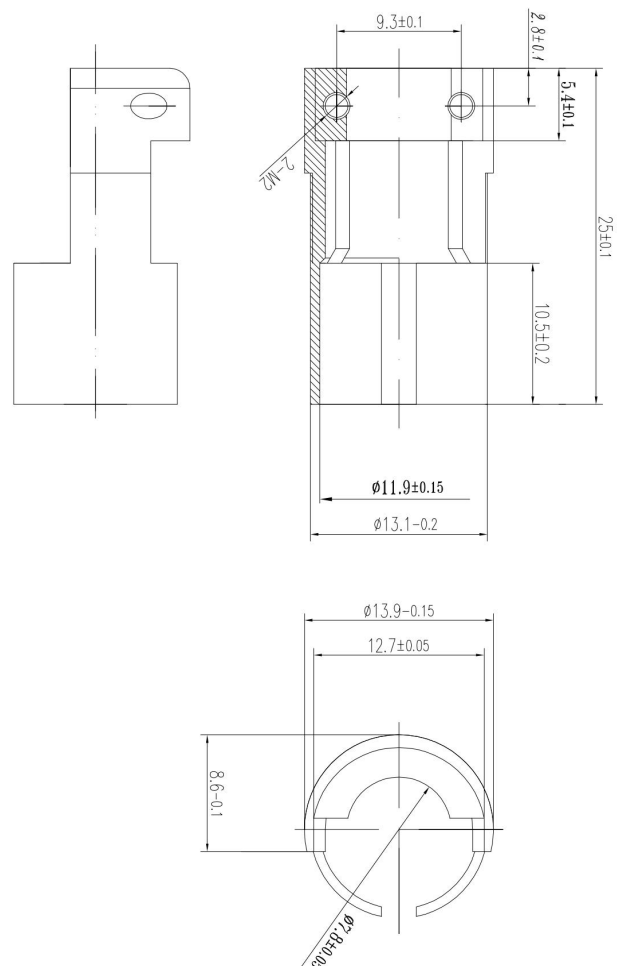

Screws:





- ELECTRICAL CHARACTERISTICS

- 1、 Nominal impedance: $\leq 5\text{m}\Omega$
- 2、 Withstanding Voltage : 650V
- 3、 Contact Resistance: $< 5\text{m}\Omega$
- 4、 Insulator Resistance: $500\text{M}\Omega$
- 5、 Rated voltage 300V

- MECHANICAL CHARACTERISTICS

- 1、 Engagement Forces 4PIN-25N max ;
- 2、 Disengagement Forces 4PIN-25N max ;
- 3、 Contact Retention: 6 lbs Min
- 4、 Coupling Nut Retention: 80 lbs (350 N) Min
- 5、 Coupling Proof Torque : 10 lbs-in Min
- 6、 IP-degree : IP68

- Environmental requirements

1. Temperature range : -40°C $+110^{\circ}\text{C}$ (IEC 60068-1) ;
2. F lammability : UL94-V0.
3. M ating cycles 500