

High Performance Dish Antenna 2.1 - 2.5 GHz, Dual Polarized, FOR WIRELESS COMMUNICATIONS

Electrical Parameters


Frequency (MHz)	2100 – 2500
Gain (dBi)	27±0.5
VSWR	1.3 : 1 (Typ)
H Plane BW (°)	7±0.5
E Plane BW (°)	7±0.5
Polarization	Linear V & H
Port to Port Isolation (dB)	> 30
Max. Power Input (Watts)	50
Impedance (Ω)	50
Front to Back Ratio (dB)	>30
Cross Poln. (dB)	>22
Connector Termination	N(F)
Lightning Protection	DC Ground

ST-25LST27



Mechanical Parameters

Dimension (mm)	Ø 1200
Antenna Material	Aluminium Alloy
Gross Weight (Kg)	10±1
Packing Dimension (inch)	51 X 51 X 14
Mounting Hardware	MS Galvanized & Powder Coated
Mounting Style	Tower and Pole
Mounting Pole Diameter (inch)	2 - 3
Mounting Adjustment	H Plane ± 180°
	V Plane ± 15°

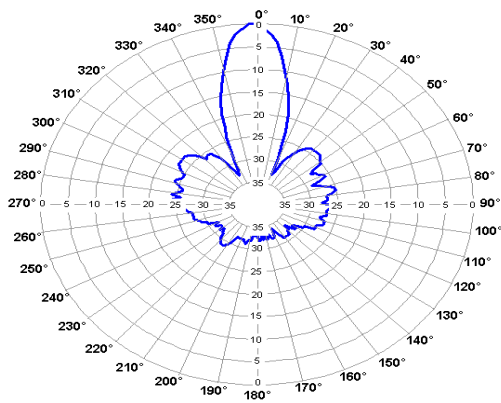

Environmental Parameters

Temperature Range (°C)	(-) 20 to (+) 55
Wind Speed (km/hr)	200
Humidity	95% No Condensation
Ingress Protection	IP 65