


FEATURES:

- High Output Power
- Low Harmonic
- Coupled Output
- Low Spurious
- Pulse Modulation
- Internal High Stability TCXO
- Humidity Protected Mechanical Package

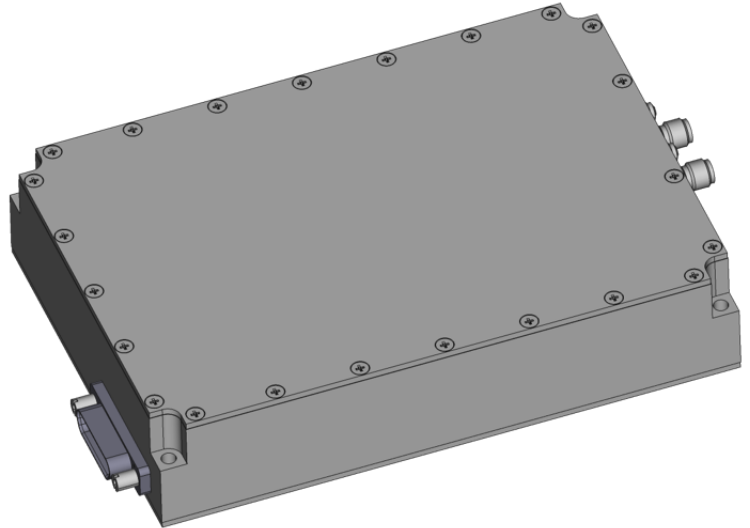

ELECTRICAL SPECIFICATIONS:

Parameter	Min.	Typ.	Max.	Units
RF Frequency Range	20		18000	MHz
Frequency Resolution	1			Hz
Frequency Accuracy			±1.5	ppm
Frequency Stability vs Temp			±0.28	ppm
Tuning Speed		200		us
Harmonic Level @ 20 dBm Output (500-18000 MHz)		-60		dBc
Harmonic Level @ 20 dBm Output (20-500 MHz)		-30		dBc
Spurious Level		-60		dBc
Pulse Width	0.1		100000	us
Pulse Period	1		100000	us
Rise/ Fall Time		10		ns
Pulse Width Resolution	50			ns
Pulse Width Accuracy		+/-20		ns
Pulse Period Accuracy (1us<T<200us)		+/-20		ns
Pulse Period Accuracy (T>200 us)		+/-100		ppm
Pulse ON/OFF Isolation		60		dBc
Maximum Output Power	18	20		dBm
Output Power Accuracy		±1.5		dB
Output Power Range	-40		20	dBm
Output Power Resolution		0.5		dB
Coupled Output Coupling (500-18000 MHz)		20		dB
Operating DC Voltage		+12	+12.5	Volts
Operating DC Current			1.5	A
Communication Interface	RS422			

*Electrical specifications are given at 25 °C.

ABSOLUTE MAXIMUM RATING:


Parameter	Min.	Typ.	Max.	Units
DC Voltage			+12.5	Volts
Operating Case Temperature	-40		+70	°C
Storage Temperature	-40		+85	°C

MECHANICAL SPECIFICATIONS:

Parameter	Value	Units
Dimensions (L x W x H)	130 x 90 x 28	mm
Weight	500	gr
RF Connectors (RF OUT, CPLR OUT)	SMA, Female	
DC & Control Connector	Micro-D 25pin Female	
Cooling	External Heatsink Required	
Mechanical Housing	Nickel Plated Aluminum	
Humidity	MIL-STD-202H Method 103 Condition B	

MECHANICAL OUTLINE:

- All dimensions are in mm
- Tolerances: +/- 0.2 mm

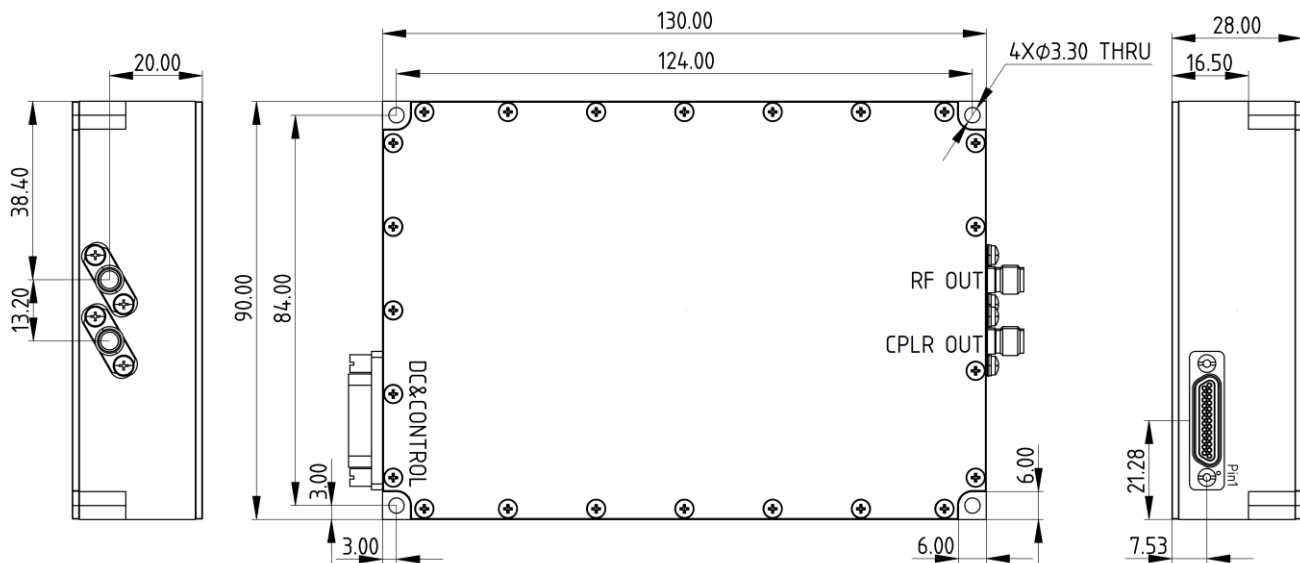**REVISION HISTORY:**

Rev. No.	Date	Description
P1	27-Apr-2026	Preliminary Release