

SYNERGY TELECOM PVT LTD



RF Coaxial Series

- Connector
- Adapter
- Termination
- Waveguide-Coaxial Adapter
- DC Block
- Grass Bead




RF Coaxial Connectors



⊕	SMA	DC~27GHz
⊕	2.92mm	DC~40GHz
⊕	2.4mm	DC~50GHz
⊕	1.85mm	DC~65GHz
⊕	N type	DC~18GHz
⊕	TNCA	DC~18GHz
⊕	SSMA	DC~40GHz



Part Number Designation Of Connectors

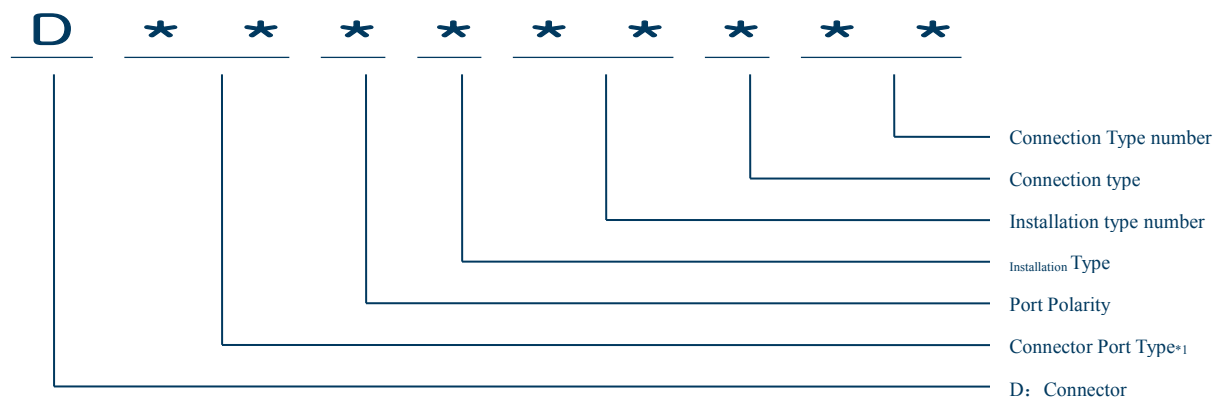

*1、Connector Type

34	N type
36	2.92mm
37	2.4mm
38	1.85mm
54	TNCA
55	SMA
57	SSMA

*2、Port Polarity

0	K/Jack/Female
1	J/Plug/Male
N	None
3	Reverse Polarity (hole)/K/Jack/Female
4	Reverse Polarity(pin) /J/Plug/Male


*3、Installation Type

S	Replaceable
M	Receptacle(Round Contact)
P	Receptacle(Exposed Teflon)
D	Receptacle(Blunt Post Contact)
T	Receptacle (Tab Contact)
B	PCB Receptacles
L	Stripline Receptacle


*4、Connection Type

F	Flange
Y	Thread-in
H	PCB Vertical welding
E	PCB edge welding


Flange Specification no.

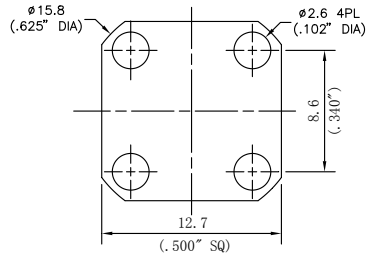


F01

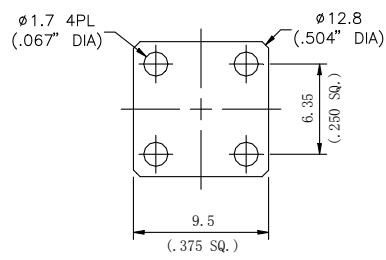


F02




F03




F04




F05




F06




F07




F08

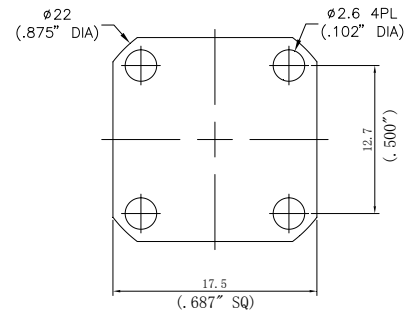


F09

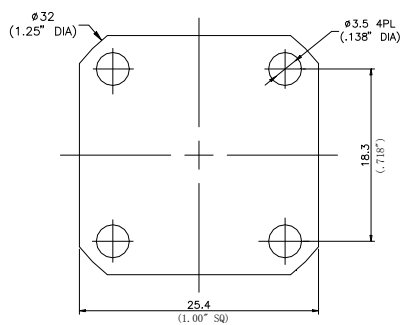

F10



F13

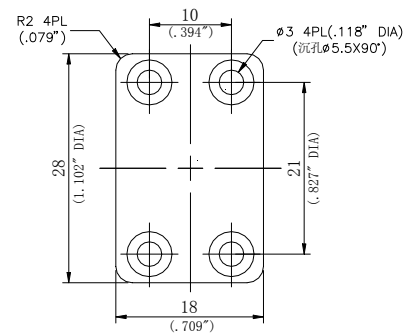

F33



SMA Connector Series (DC~27GHz)

SMA series RF coaxial connector with small size, broad band, good mechanical performance, high reliable.

Performance Features

Impedance: 50Ω

Frequency Range: DC~27GHz

VSWR:

DC~18GHz--- 1.10:1 (Max)

18GHz~27GHz--- 1.15:1 (Max)

Contact resistance: Centre Conductor $\leq 3.0\text{m}\Omega$
Outer Conductor $\leq 2.0\text{m}\Omega$

Insulation resistance: $\geq 5000\text{M}\Omega$

Withstanding Voltage: 1000V

Durability: 500 Cycles

Operating Temperature: $-55^{\circ}\text{C}\sim+165^{\circ}\text{C}$

Materials/Finishes

Housing:


Type 303 Stainless Steel

Polished&Passivated


Centre Contact: Beryllium Copper Plated Gold (MIL-G-45204)

Insulators: PTFE&PEI

Interfaces


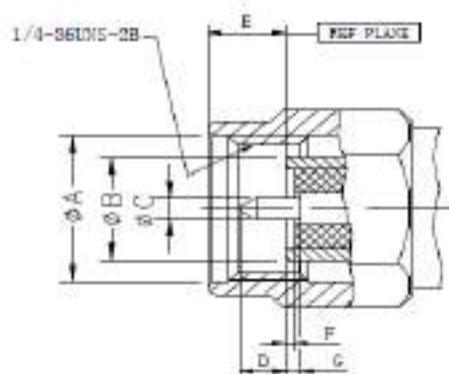


SMA Male				
	mm		Inch	
	Min	Max	Min	Max
A	6.48	6.73	0.255	0.265
B	4.52	4.59	0.1780	0.1808
C	0.90	0.93	0.0355	0.0365
D	2.03	2.29	0.080	0.090
E	2.59	3.35	0.102	0.132
F	0.00	0.05	0.000	0.002
G	0.00	0.08	0.000	0.003


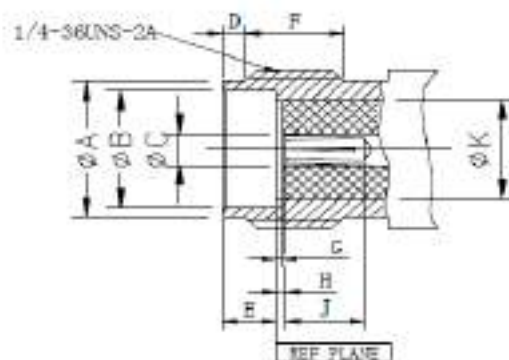


SMA Female				
	mm		Inch	
	Min	Max	Min	Max
A	5.28	5.49	0.208	0.216
B	4.60	4.67	0.1810	0.1837
C	1.27	1.29	0.0500	0.0506
D	0.38	1.14	0.015	0.045
E	1.88	1.98	0.074	0.078
F	3.81	—	0.150	—
G	0.00	0.05	0.000	0.002
H	0.00	0.08	0.000	0.003
J	2.54	—	0.100	—
K	4.10	4.13	0.1615	0.1625



Series Field





Part no.	ΦD
D550S09F01	0. 23mm/0. 009 "
D550S12F01	0. 30mm/0. 012 "
D550S15F01	0. 38mm/0. 015 "
D550S18F01	0. 46mm/0. 018 "
D550S20F01	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F02	0. 23mm/0. 009 "
D550S12F02	0. 30mm/0. 012 "
D550S15F02	0. 38mm/0. 015 "
D550S18F02	0. 46mm/0. 018 "
D550S20F02	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F03	0. 23mm/0. 009 "
D550S12F03	0. 30mm/0. 012 "
D550S15F03	0. 38mm/0. 015 "
D550S18F03	0. 46mm/0. 018 "
D550S20F03	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F13	0. 23mm/0. 009 "
D550S12F13	0. 30mm/0. 012 "
D550S15F13	0. 38mm/0. 015 "
D550S18F13	0. 46mm/0. 018 "
D550S20F13	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F04	0. 23mm/0. 009 "
D550S12F04	0. 30mm/0. 012 "
D550S15F04	0. 38mm/0. 015 "
D550S18F04	0. 46mm/0. 018 "
D550S20F04	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F05	0. 23mm/0. 009 "
D550S12F05	0. 30mm/0. 012 "
D550S15F05	0. 38mm/0. 015 "
D550S18F05	0. 46mm/0. 018 "
D550S20F05	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F06	0. 23mm/0. 009 "
D550S12F06	0. 30mm/0. 012 "
D550S15F06	0. 38mm/0. 015 "
D550S18F06	0. 46mm/0. 018 "
D550S20F06	0. 51mm/0. 020 "





Part no.	ΦD
D550S09F07	0. 23mm/0. 009 "
D550S12F07	0. 30mm/0. 012 "
D550S15F07	0. 38mm/0. 015 "
D550S18F07	0. 46mm/0. 018 "
D550S20F07	0. 51mm/0. 020 "





Part no.	ΦD
D550S09Y02	0. 23mm/0. 009 "
D550S12Y02	0. 30mm/0. 012 "
D550S15Y02	0. 38mm/0. 015 "
D550S18Y02	0. 46mm/0. 018 "
D550S20Y02	0. 51mm/0. 020 "




Part no.	ΦD
D551S09F01	0. 23mm/0. 009 "
D551S12F01	0. 30mm/0. 012 "
D551S15F01	0. 38mm/0. 015 "
D551S18F01	0. 46mm/0. 018 "
D551S20F01	0. 51mm/0. 020 "




Part no.	ΦD
D551S09F02	0. 23mm/0. 009 "
D551S12F02	0. 30mm/0. 012 "
D551S15F02	0. 38mm/0. 015 "
D551S18F02	0. 46mm/0. 018 "
D551S20F02	0. 51mm/0. 020 "




Part no.	ΦD
D551S09F03	0. 23mm/0. 009 "
D551S12F03	0. 30mm/0. 012 "
D551S15F03	0. 38mm/0. 015 "
D551S18F03	0. 46mm/0. 018 "
D551S20F03	0. 51mm/0. 020 "

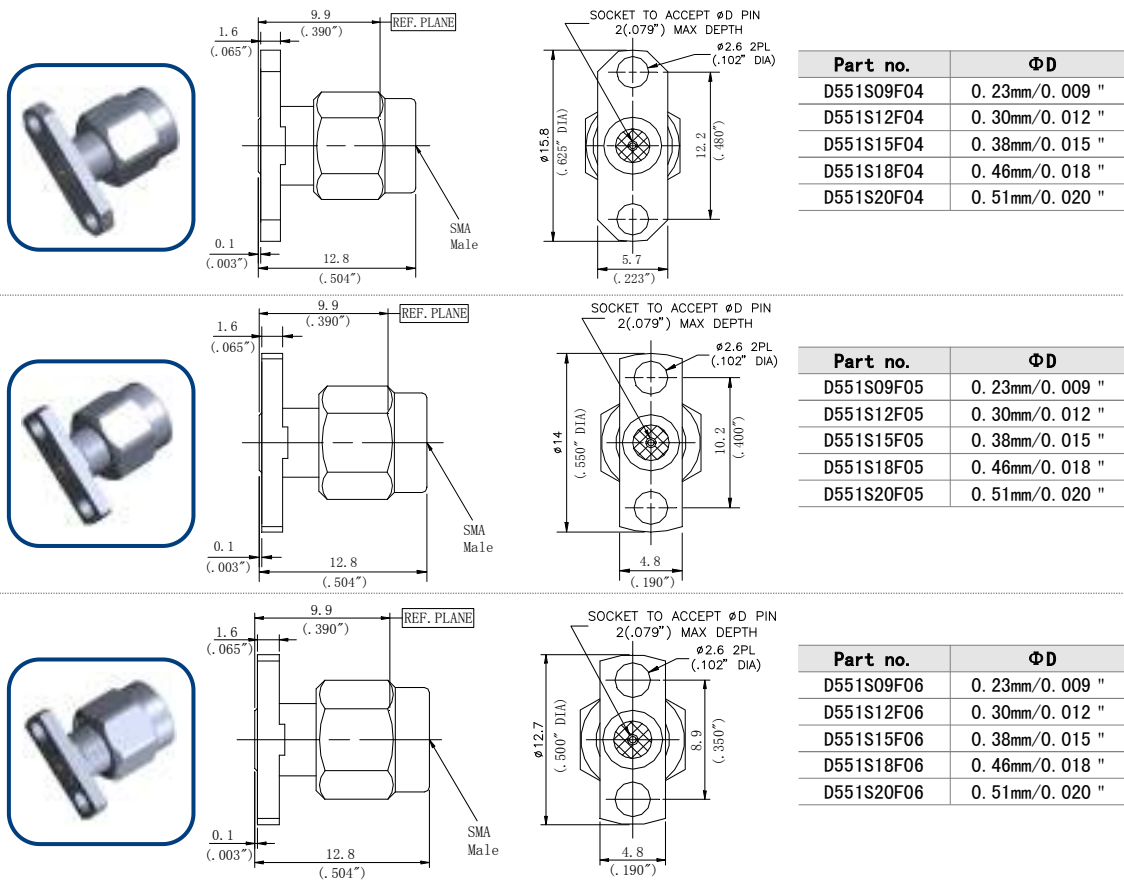


✧ SMA Series Bulkhead Flange Connectors

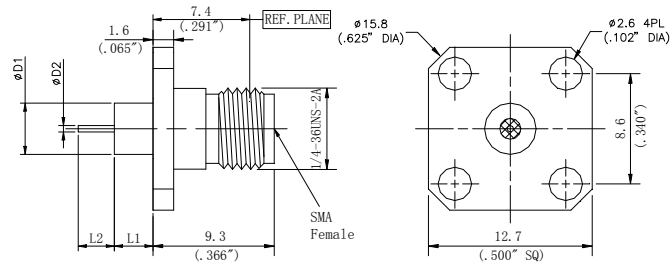


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F01	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F01	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

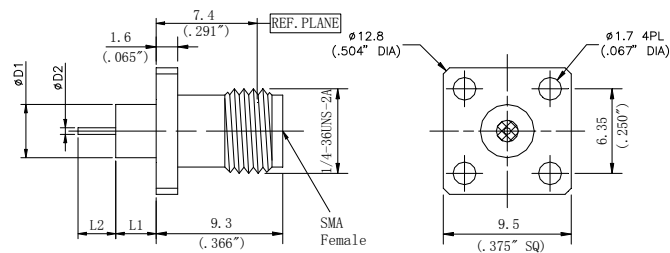


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F02	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F02	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

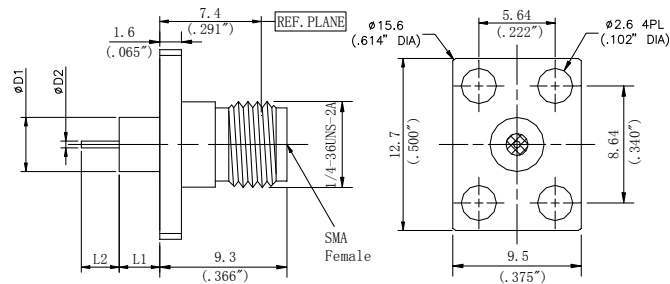


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F03	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F03	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

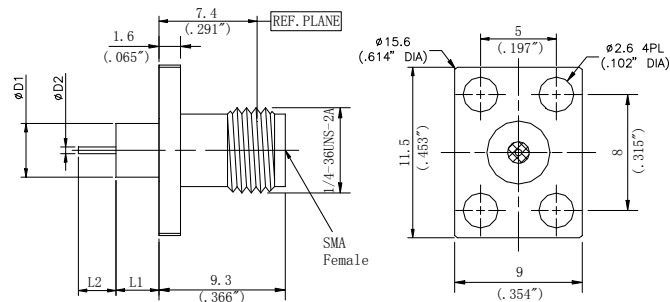


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F13	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F13	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

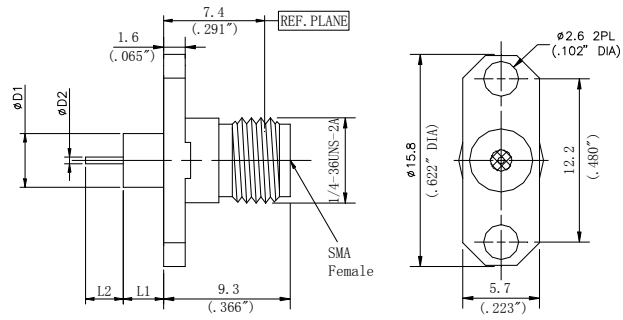


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F04	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F04	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

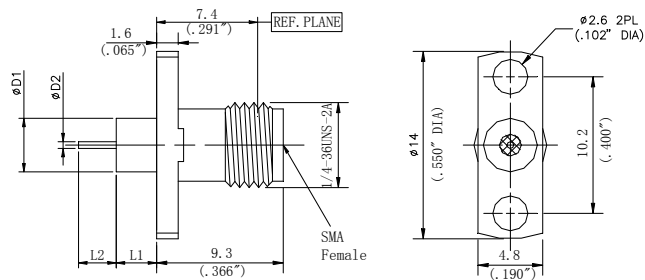


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F05	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F05	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

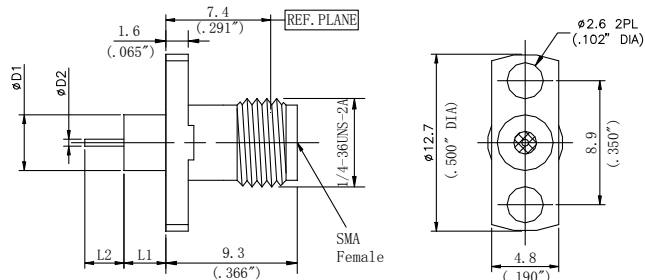


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F06	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F06	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

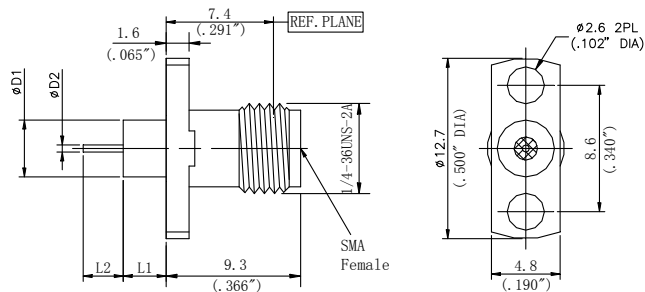


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D550M0101F07	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.079 "
D550M0202F07	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

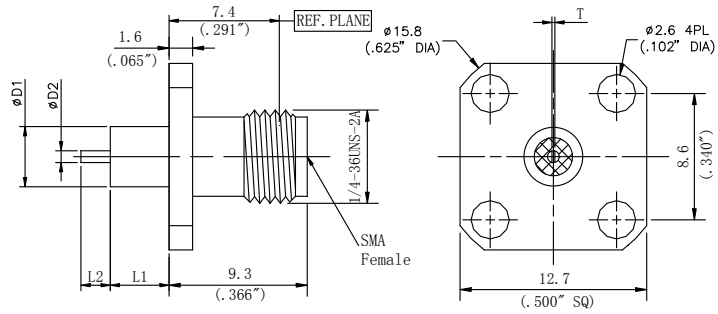



Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T
D550M0313F01	6mm/0.236 "	1mm/0.039 "	4mm/0.158 "	1.5mm/0.059 "	0.2mm/0.008 "

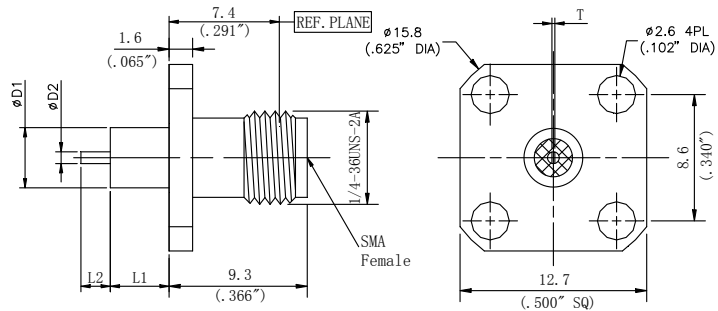


Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T
D550M0112F01	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	1.5mm/0.059 "	0.2mm/0.008 "

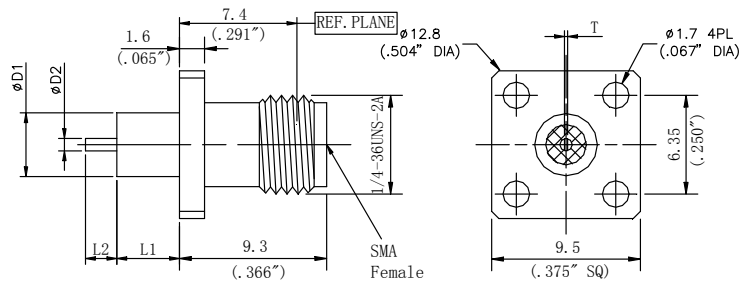

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T
D550M0112F02	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	1.5mm/0.06 "	0.2mm/0.008 "



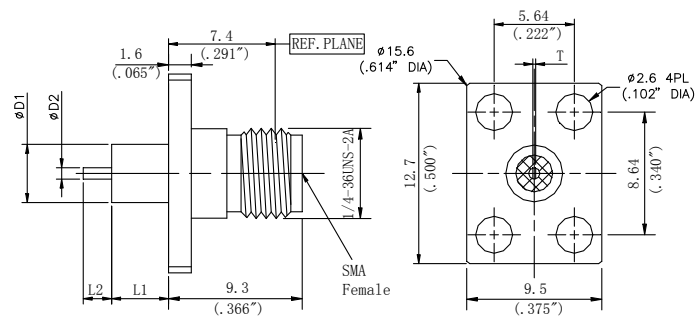


Drawing1




Drawing2

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550M0112F03	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	1.5mm/0.06 "	0.2mm/0.008 "	Drawing1
D550M0112F03C	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	1.5mm/0.06 "	0.2mm/0.008 "	Drawing2



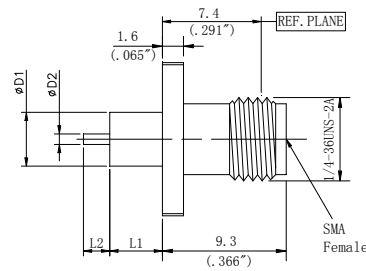


Drawing1



Drawing2

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550M0112F13	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D550M0112F13C	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing2



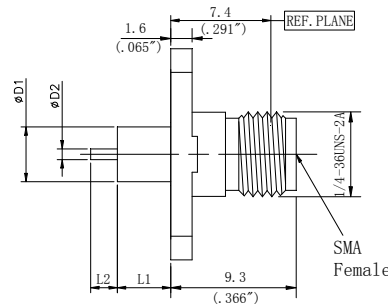


Drawing1



Drawing2

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550M0112F04	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D550M0112F04C	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing2



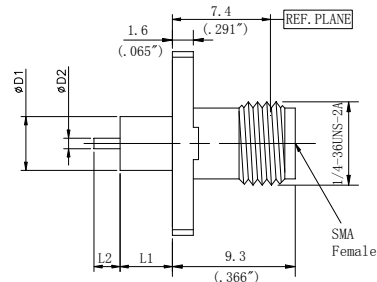


Drawing1



Drawing2

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550M0112F05	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D550M0112F05C	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing2

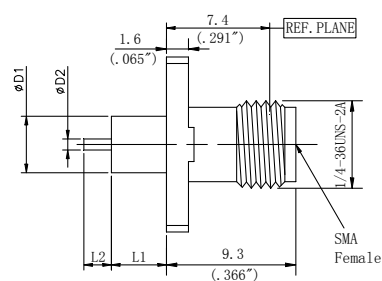


Drawing1





Drawing2



Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550M0112F06	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D550M0112F06C	4mm/0.158"	0.8mm/0.031"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing2

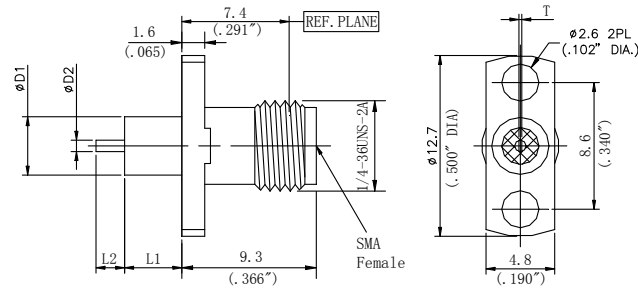



Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550M0112F07	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	1.5mm/0.06 "	0.2mm/0.008 "	Drawing1
D550M0112F07C	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	1.5mm/0.06 "	0.2mm/0.008 "	Drawing2

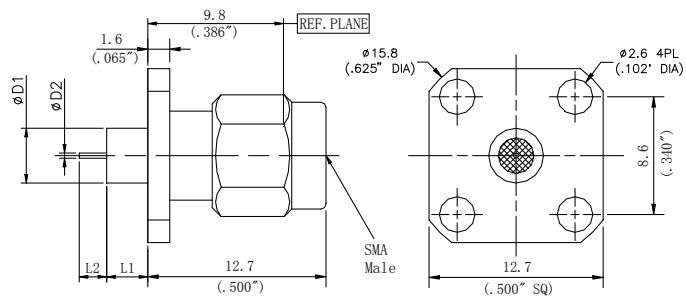



Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D551M0202F01	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

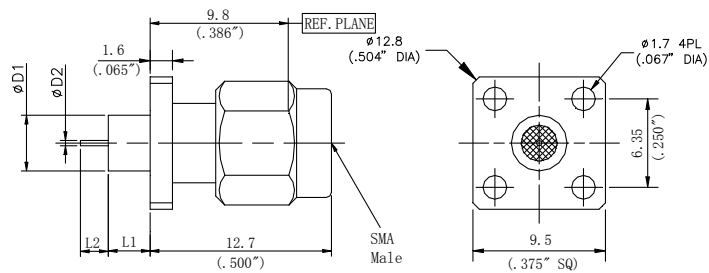


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D551M0202F02	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

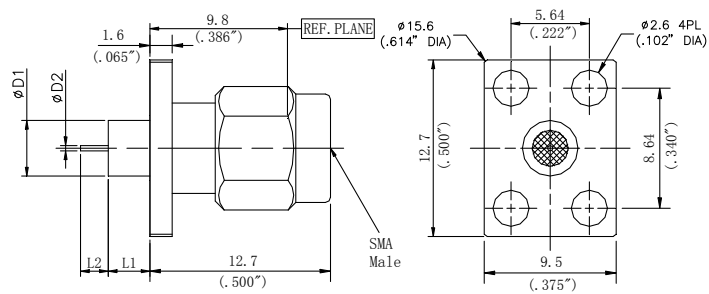


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D551M0202F03	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

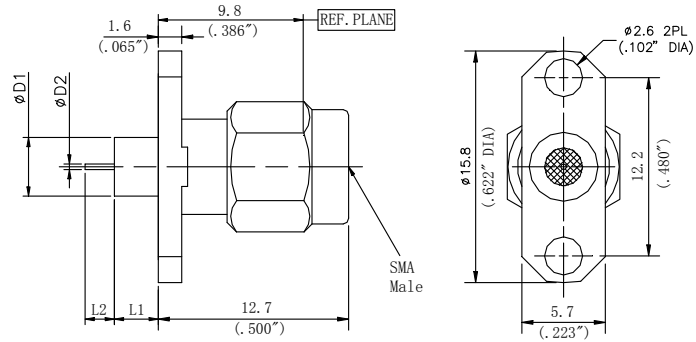

Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D551M0202F04	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

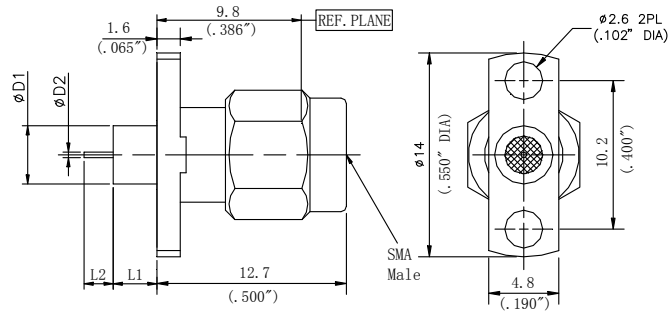


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D551M0202F05	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "

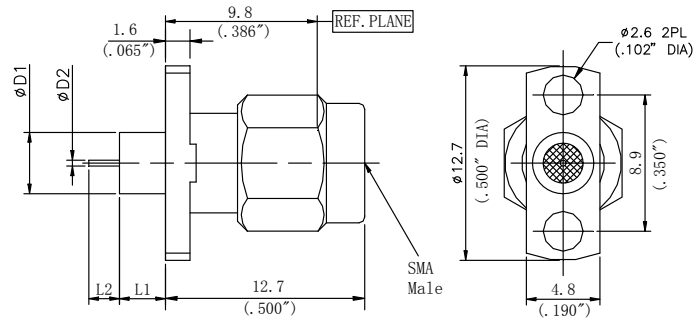


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D551M0202F06	4mm/0.158 "	0.38mm/0.015 "	3mm/0.118 "	2mm/0.079 "


❖ SMA Series Thread-in Connectors

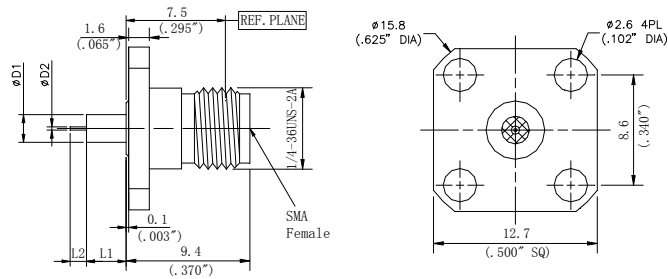


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F01	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0204F01	3.9mm/0.154 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "
D550P0304F01	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

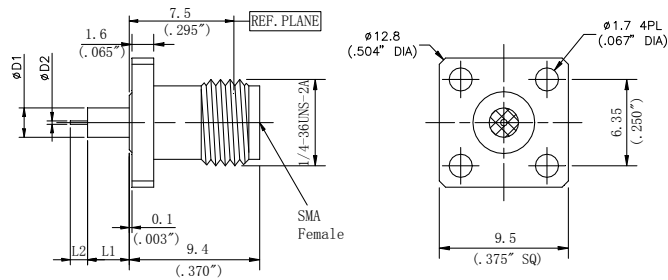


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F02	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0304F02	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

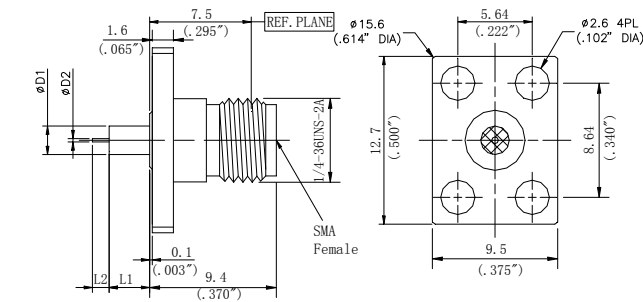


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F03	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0304F03	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

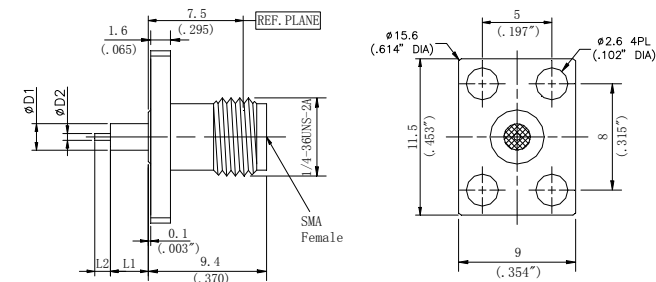


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F13	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0304F13	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

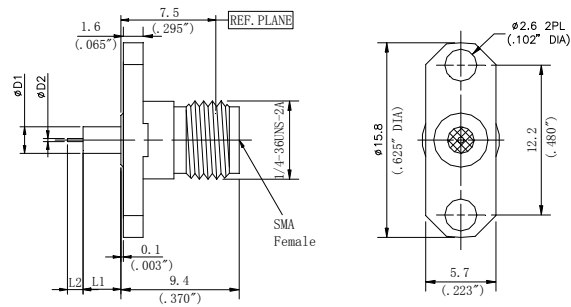


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F04	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0204F04	3.9mm/0.154 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "
D550P0304F04	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

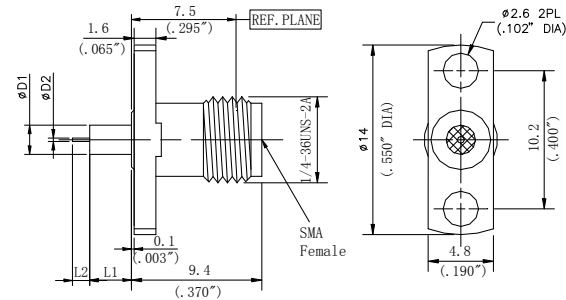


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F05	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0304F05	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

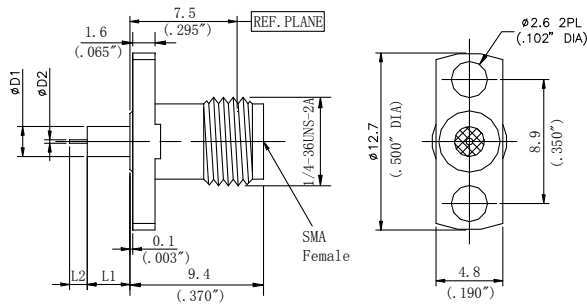



Part no.	ΦD1	ΦD2	L1	L2
D550P0103F06	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0304F06	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

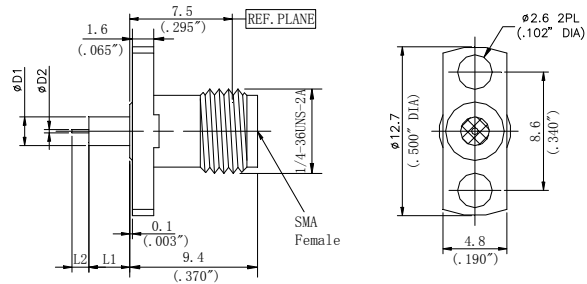


Part no.	ΦD1	ΦD2	L1	L2
D550P0103F07	2.2mm/0.087 "	0.30mm/0.012 "	3.2mm/0.126 "	1.27mm/0.05 "
D550P0304F07	2.1mm/0.083 "	0.64mm/0.025 "	15mm/0.59 "	3mm/0.118 "

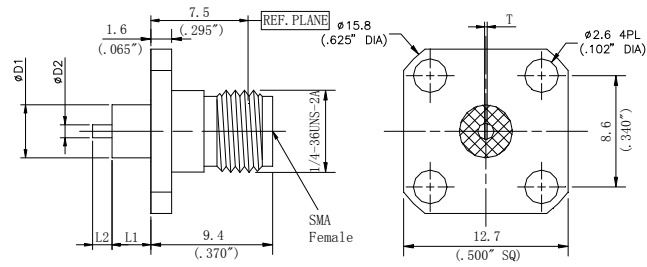

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T
D550P0713F01	4.1mm/0.162"	1mm/0.04"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"
D550P0813F01	4.1mm/0.162"	1mm/0.04"	3mm/0.118"	1.5mm/0.06"	0.2mm/0.008"

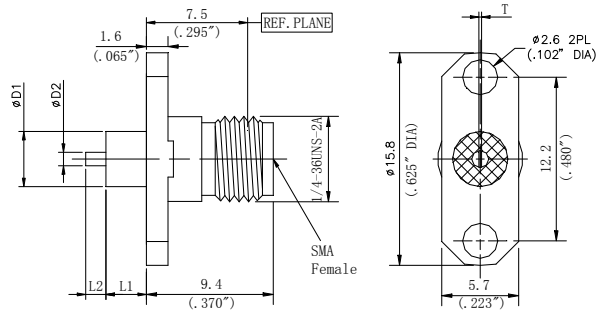


Drawing1





Drawing2


Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D550P0713F04	4.1mm/0.162"	1mm/0.04"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D550P0713F04C	4.1mm/0.162"	1mm/0.04"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing2
D550P0813F04	4.1mm/0.162"	1mm/0.04"	3mm/0.118"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D550P0813F04C	4.1mm/0.162"	1mm/0.04"	3mm/0.118"	1.5mm/0.06"	0.2mm/0.008"	Drawing2

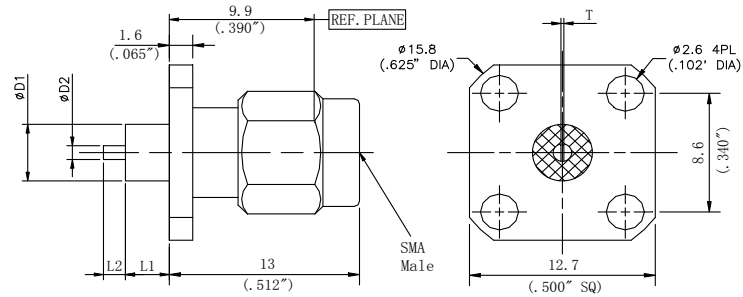

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T
D551P0713F01	4.1mm/0.162"	1mm/0.04"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"

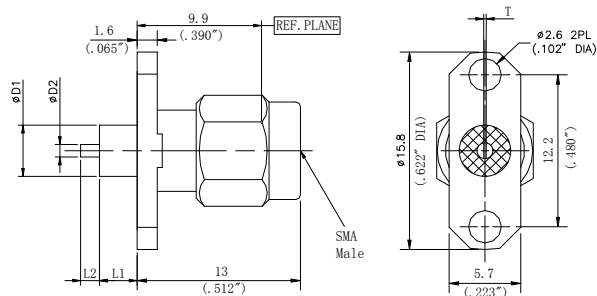


Drawing1




Drawing2

Part no.	$\Phi D1$	$\Phi D2$	L1	L2	T	Drawing
D551P0713F04	4.1mm/0.162"	1mm/0.04"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing1
D551P0713F04C	4.1mm/0.162"	1mm/0.04"	4mm/0.158"	1.5mm/0.06"	0.2mm/0.008"	Drawing2


✧ SMA Series Airline Bulkhead Connectors

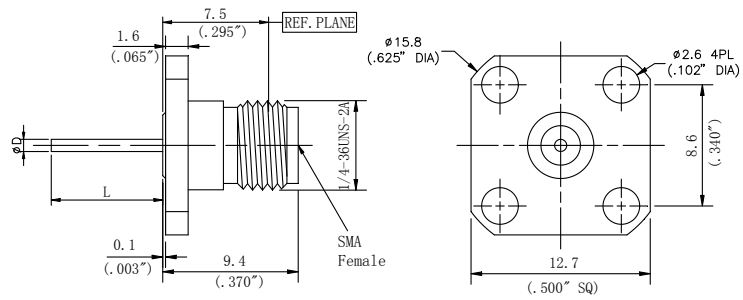


Part no.	ΦD	L
D550D25F01-709	0.64mm/0.025"	18mm/0.71"
D550D34F01-1024	0.87mm/0.034"	26mm/1.024"
D550D34F01-430	0.87mm/0.034"	10.92mm/0.430"

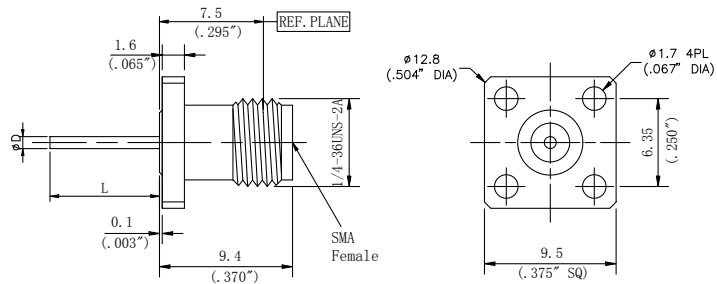


Part no.	ΦD	L
D550D25F02-709	0.64mm/0.025"	18mm/0.71"
D550D34F02-1024	0.87mm/0.034"	26mm/1.024"
D550D34F02-430	0.87mm/0.034"	10.92mm/0.430"

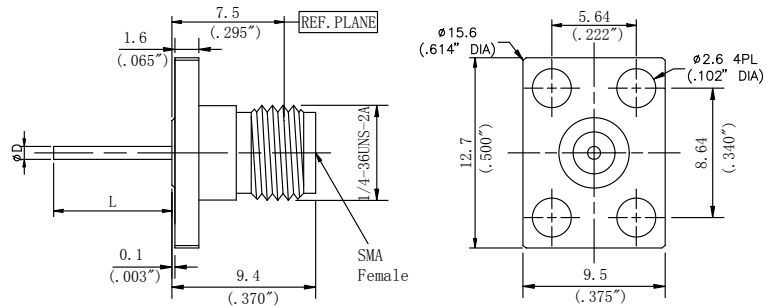


Part no.	ΦD	L
D550D25F03-709	0.64mm/0.025"	18mm/0.71"
D550D34F03-1024	0.87mm/0.034"	26mm/1.024"
D550D34F03-430	0.87mm/0.034"	10.92mm/0.430"

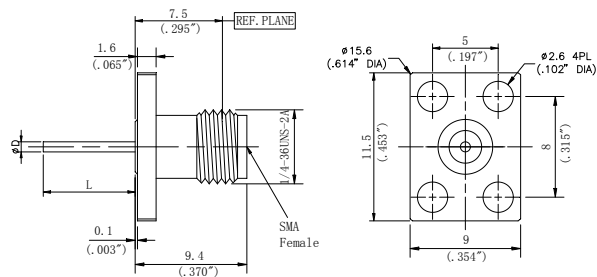


Part no.	ΦD	L
D550D25F13-709	0.64mm/0.025"	18mm/0.71"
D550D34F13-1024	0.87mm/0.034"	26mm/1.024"
D550D34F13-430	0.87mm/0.034"	10.92mm/0.430"

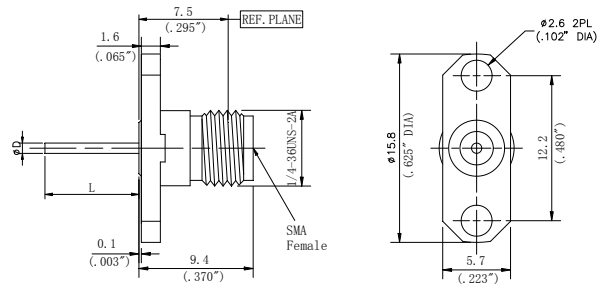

Part no.	ΦD	L
D550D25F04-709	0.64mm/0.025 "	18mm/0.71 "
D550D34F04-1024	0.87mm/0.034 "	26mm/1.024 "
D550D34F04-430	0.87mm/0.034 "	10.92mm/0.430 "

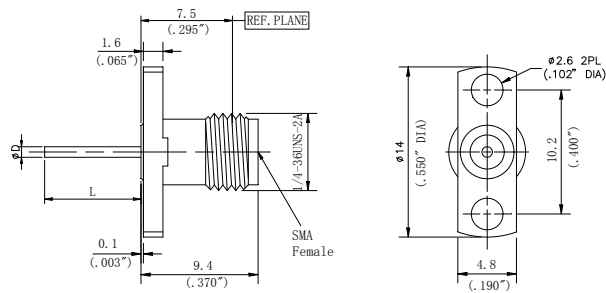


Part no.	ΦD	L
D550D25F05-709	0.64mm/0.025 "	18mm/0.71 "
D550D34F05-1024	0.87mm/0.034 "	26mm/1.024 "
D550D34F05-430	0.87mm/0.034 "	10.92mm/0.430 "

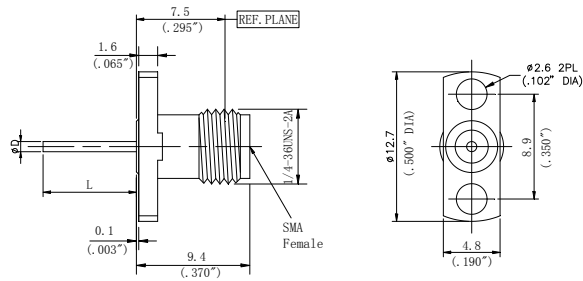


Part no.	ΦD	L
D550D25F06-709	0.64mm/0.025 "	18mm/0.71 "
D550D34F06-1024	0.87mm/0.034 "	26mm/1.024 "
D550D34F06-430	0.87mm/0.034 "	10.92mm/0.430 "



✧ SMA Series Straight Connectors

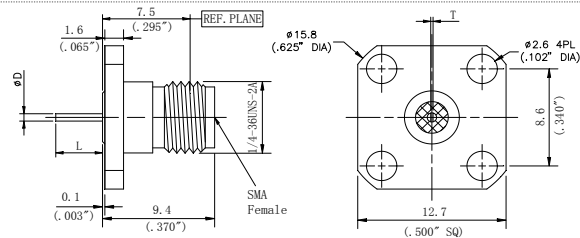

Part no.	ΦD	L	T
D550T11F01	0.64mm/0.025 "	4mm/0.158 "	0.2mm/0.008 "
D550T14F01	1.27mm/0.050 "	1.27mm/0.050 "	0.15mm/0.006 "

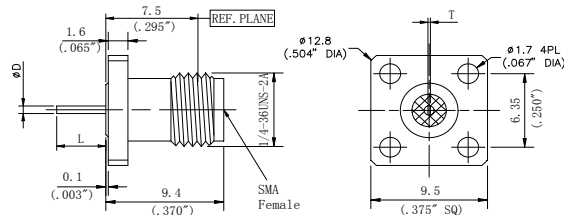

Part no.	ΦD	L	T
D550T11F02	0.64mm/0.025 "	4mm/0.158 "	0.2mm/0.008 "
D550T14F02	1.27mm/0.050 "	1.27mm/0.050 "	0.15mm/0.006 "


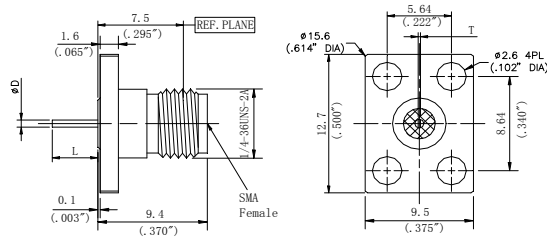


Drawing1



Drawing2

Part no.	ΦD	L	T	Drawing
D550T11F03	0.64mm/0.025 "	4mm/0.158 "	0.2mm/0.008 "	Drawing1
D550T11F03C	0.64mm/0.025 "	4mm/0.158 "	0.2mm/0.008 "	Drawing2
D550T14F03	1.27mm/0.050 "	1.27mm/0.050 "	0.15mm/0.006 "	Drawing1
D550T14F03C	1.27mm/0.050 "	1.27mm/0.050 "	0.15mm/0.006 "	Drawing2

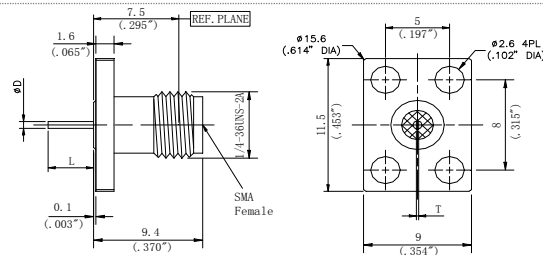



Drawing1



Drawing2



Part no.	ΦD	L	T	Drawing
D550T11F13	0.64mm/0.025 "	4mm/0.158 "	0.2mm/0.008 "	Drawing1
D550T11F13C	0.64mm/0.025 "	4mm/0.158 "	0.2mm/0.008 "	Drawing2
D550T14F13	1.27mm/0.050 "	1.27mm/0.050 "	0.15mm/0.006 "	Drawing1
D550T14F13C	1.27mm/0.050 "	1.27mm/0.050 "	0.15mm/0.006 "	Drawing2

✧ SMA Series PCB Connectors

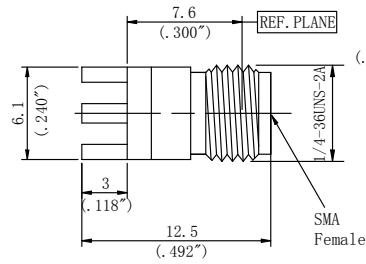


Drilling/Assembly Drawing

Part no.
D550B51H01-118

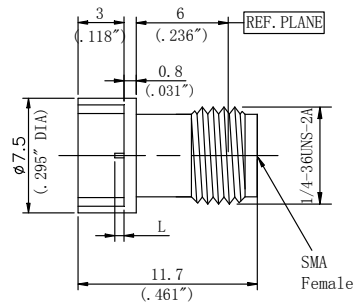

Part no.	D	L	Suitable sheet thickness
D550B12E01-023	1.93mm/0.076 "	0.6mm/0.023 "	1.78mm/0.070 "
D550B12E02-023	0.76mm/0.030 "	0.6mm/0.023 "	0.61mm/0.024 "
D550B12E03-023	1.02mm/0.040 "	0.6mm/0.023 "	0.87mm/0.034 "
D550B12E01-048	1.93mm/0.076 "	1.22mm/0.048 "	1.78mm/0.070 "
D550B12E02-048	0.76mm/0.030 "	1.22mm/0.048 "	0.61mm/0.024 "
D550B12E03-048	1.02mm/0.040 "	1.22mm/0.048 "	0.87mm/0.034 "

✧ SMA Series Bulkhead Thread-in Connectors

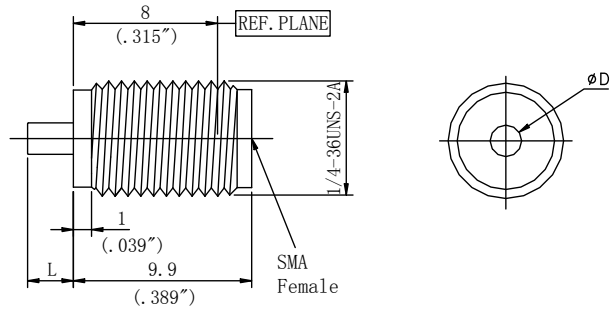

Part no.	ΦD	L
D550L69Y01-100	1.75mm/0.069 "	2.54mm/0.100 "
D550L69Y01-185	1.75mm/0.069 "	4.7mm/0.185 "

2.92mm Connector Series (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

VSWR:

DC~40GHz... 1.15:1 (Max)

Contact resistance: Centre Conductor ≤ 3.0mΩ

Outer Conductor ≤ 2.0mΩ

Insulation resistance: ≥ 3000MΩ

Withstanding Voltage: 750V

Durability: 500 Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing : Type 303 Stainless Steel-Polished&Passivated


Center Contact: Beryllium copper Plated Gold (MIL-G-45204)

Insulators: PEI or PEI&PTFE

Interfaces

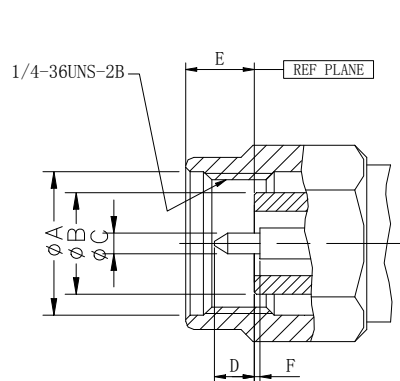















2.92mm Male				
	mm		Inch	
	Min	Max	Min	Max
A	6.48	—	0.255	—
B	4.52	4.57	0.178	0.180
C	0.90	0.94	0.0355	0.0370
D	1.40	1.65	0.055	0.065
E	—	3.43	—	0.135
F	0.00	0.13	0.000	0.005





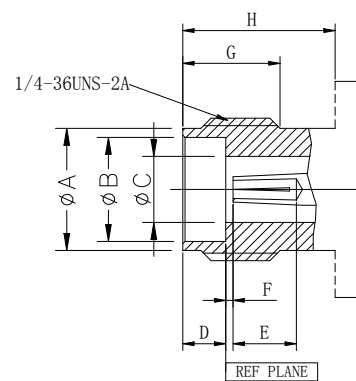


2.92mm Female				
	mm		Inch	
	Min	Max	Min	Max
A	5.23	5.44	0.206	0.214
B	4.60	4.65	0.181	0.183
C	2.90	2.95	0.114	0.116
D	1.88	1.98	0.074	0.078
E	2.67	—	0.105	—
F	0.00	0.13	0.000	0.005
G	4.32	—	0.170	—
H	5.54	—	0.218	—


Note: interface per MIL-STD-348A

✧ 2.92mm Series Field Replaceable Flange Connectors


			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09F01</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12F01</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15F01</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20F01</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09F01	0.23mm/0.009 "	D360S12F01	0.30mm/0.012 "	D360S15F01	0.38mm/0.015 "	D360S20F01	0.51mm/0.020 "
Part no.	ΦD												
D360S09F01	0.23mm/0.009 "												
D360S12F01	0.30mm/0.012 "												
D360S15F01	0.38mm/0.015 "												
D360S20F01	0.51mm/0.020 "												
			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09F02</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12F02</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15F02</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20F02</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09F02	0.23mm/0.009 "	D360S12F02	0.30mm/0.012 "	D360S15F02	0.38mm/0.015 "	D360S20F02	0.51mm/0.020 "
Part no.	ΦD												
D360S09F02	0.23mm/0.009 "												
D360S12F02	0.30mm/0.012 "												
D360S15F02	0.38mm/0.015 "												
D360S20F02	0.51mm/0.020 "												
			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09F04</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12F04</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15F04</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20F04</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09F04	0.23mm/0.009 "	D360S12F04	0.30mm/0.012 "	D360S15F04	0.38mm/0.015 "	D360S20F04	0.51mm/0.020 "
Part no.	ΦD												
D360S09F04	0.23mm/0.009 "												
D360S12F04	0.30mm/0.012 "												
D360S15F04	0.38mm/0.015 "												
D360S20F04	0.51mm/0.020 "												
			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09F05</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12F05</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15F05</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20F05</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09F05	0.23mm/0.009 "	D360S12F05	0.30mm/0.012 "	D360S15F05	0.38mm/0.015 "	D360S20F05	0.51mm/0.020 "
Part no.	ΦD												
D360S09F05	0.23mm/0.009 "												
D360S12F05	0.30mm/0.012 "												
D360S15F05	0.38mm/0.015 "												
D360S20F05	0.51mm/0.020 "												
			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09F06</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12F06</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15F06</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20F06</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09F06	0.23mm/0.009 "	D360S12F06	0.30mm/0.012 "	D360S15F06	0.38mm/0.015 "	D360S20F06	0.51mm/0.020 "
Part no.	ΦD												
D360S09F06	0.23mm/0.009 "												
D360S12F06	0.30mm/0.012 "												
D360S15F06	0.38mm/0.015 "												
D360S20F06	0.51mm/0.020 "												
			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09F07</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12F07</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15F07</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20F07</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09F07	0.23mm/0.009 "	D360S12F07	0.30mm/0.012 "	D360S15F07	0.38mm/0.015 "	D360S20F07	0.51mm/0.020 "
Part no.	ΦD												
D360S09F07	0.23mm/0.009 "												
D360S12F07	0.30mm/0.012 "												
D360S15F07	0.38mm/0.015 "												
D360S20F07	0.51mm/0.020 "												
			<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D360S09Y02</td><td>0.23mm/0.009 "</td></tr><tr><td>D360S12Y02</td><td>0.30mm/0.012 "</td></tr><tr><td>D360S15Y02</td><td>0.38mm/0.015 "</td></tr><tr><td>D360S20Y02</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D360S09Y02	0.23mm/0.009 "	D360S12Y02	0.30mm/0.012 "	D360S15Y02	0.38mm/0.015 "	D360S20Y02	0.51mm/0.020 "
Part no.	ΦD												
D360S09Y02	0.23mm/0.009 "												
D360S12Y02	0.30mm/0.012 "												
D360S15Y02	0.38mm/0.015 "												
D360S20Y02	0.51mm/0.020 "												

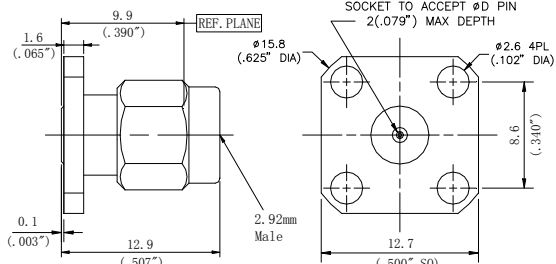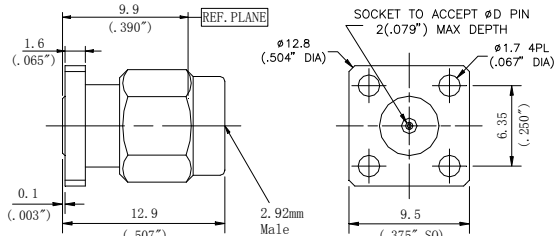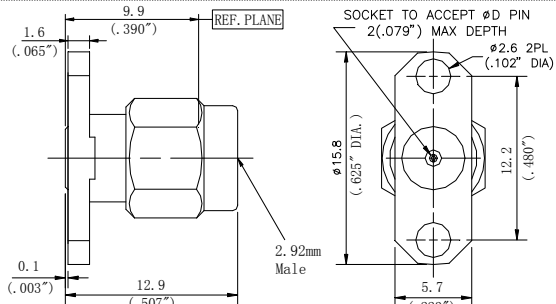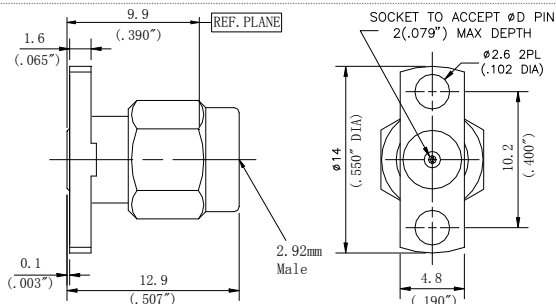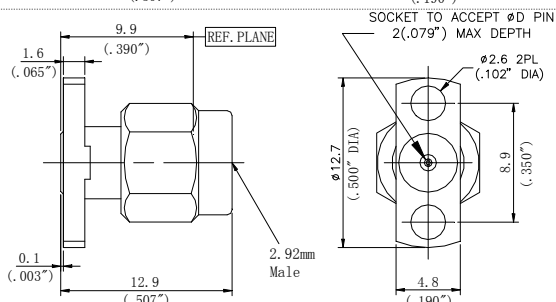		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D361S09F01</td><td>0.23mm/0.009 "</td></tr><tr><td>D361S12F01</td><td>0.30mm/0.012 "</td></tr><tr><td>D361S15F01</td><td>0.38mm/0.015 "</td></tr><tr><td>D361S20F01</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D361S09F01	0.23mm/0.009 "	D361S12F01	0.30mm/0.012 "	D361S15F01	0.38mm/0.015 "	D361S20F01	0.51mm/0.020 "
Part no.	ΦD											
D361S09F01	0.23mm/0.009 "											
D361S12F01	0.30mm/0.012 "											
D361S15F01	0.38mm/0.015 "											
D361S20F01	0.51mm/0.020 "											
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D361S09F02</td><td>0.23mm/0.009 "</td></tr><tr><td>D361S12F02</td><td>0.30mm/0.012 "</td></tr><tr><td>D361S15F02</td><td>0.38mm/0.015 "</td></tr><tr><td>D361S20F02</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D361S09F02	0.23mm/0.009 "	D361S12F02	0.30mm/0.012 "	D361S15F02	0.38mm/0.015 "	D361S20F02	0.51mm/0.020 "
Part no.	ΦD											
D361S09F02	0.23mm/0.009 "											
D361S12F02	0.30mm/0.012 "											
D361S15F02	0.38mm/0.015 "											
D361S20F02	0.51mm/0.020 "											
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D361S09F04</td><td>0.23mm/0.009 "</td></tr><tr><td>D361S12F04</td><td>0.30mm/0.012 "</td></tr><tr><td>D361S15F04</td><td>0.38mm/0.015 "</td></tr><tr><td>D361S20F04</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D361S09F04	0.23mm/0.009 "	D361S12F04	0.30mm/0.012 "	D361S15F04	0.38mm/0.015 "	D361S20F04	0.51mm/0.020 "
Part no.	ΦD											
D361S09F04	0.23mm/0.009 "											
D361S12F04	0.30mm/0.012 "											
D361S15F04	0.38mm/0.015 "											
D361S20F04	0.51mm/0.020 "											
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D361S09F05</td><td>0.23mm/0.009 "</td></tr><tr><td>D361S12F05</td><td>0.30mm/0.012 "</td></tr><tr><td>D361S15F05</td><td>0.38mm/0.015 "</td></tr><tr><td>D361S20F05</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D361S09F05	0.23mm/0.009 "	D361S12F05	0.30mm/0.012 "	D361S15F05	0.38mm/0.015 "	D361S20F05	0.51mm/0.020 "
Part no.	ΦD											
D361S09F05	0.23mm/0.009 "											
D361S12F05	0.30mm/0.012 "											
D361S15F05	0.38mm/0.015 "											
D361S20F05	0.51mm/0.020 "											
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D361S09F06</td><td>0.23mm/0.009 "</td></tr><tr><td>D361S12F06</td><td>0.30mm/0.012 "</td></tr><tr><td>D361S15F06</td><td>0.38mm/0.015 "</td></tr><tr><td>D361S20F06</td><td>0.51mm/0.020 "</td></tr></table>	Part no.	ΦD	D361S09F06	0.23mm/0.009 "	D361S12F06	0.30mm/0.012 "	D361S15F06	0.38mm/0.015 "	D361S20F06	0.51mm/0.020 "
Part no.	ΦD											
D361S09F06	0.23mm/0.009 "											
D361S12F06	0.30mm/0.012 "											
D361S15F06	0.38mm/0.015 "											
D361S20F06	0.51mm/0.020 "											


✧ 2.92mm Series Bulkhead Flange Connectors

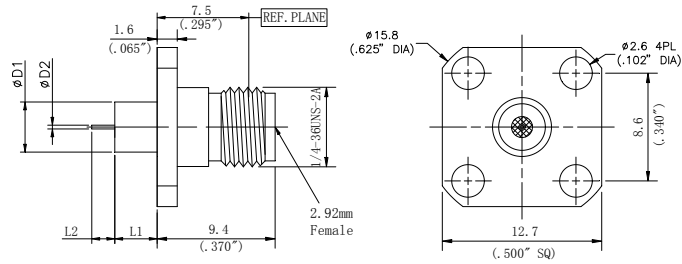


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360M0403F01	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360M0503F01	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D360M1105F01	4mm/0.158 "	0.6mm/0.024 "	10.1mm/0.398 "	1.27mm/0.050 "

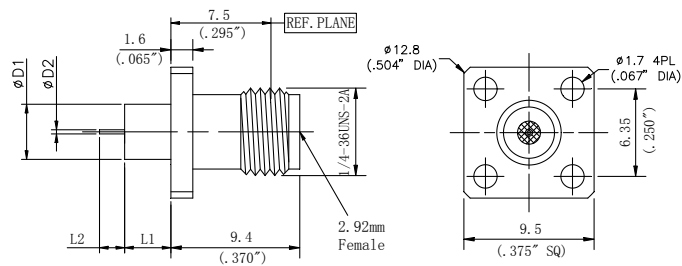


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360M0403F02	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360M0503F02	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D360M1105F02	4mm/0.158 "	0.6mm/0.024 "	10.1mm/0.398 "	1.27mm/0.050 "

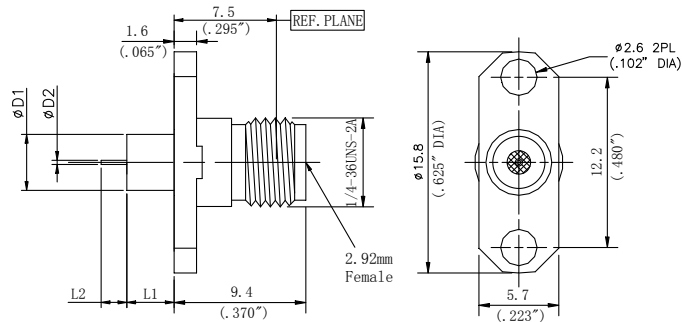


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360M0403F04	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360M0503F04	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D360M1105F04	4mm/0.158 "	0.6mm/0.024 "	10.1mm/0.398 "	1.27mm/0.050 "

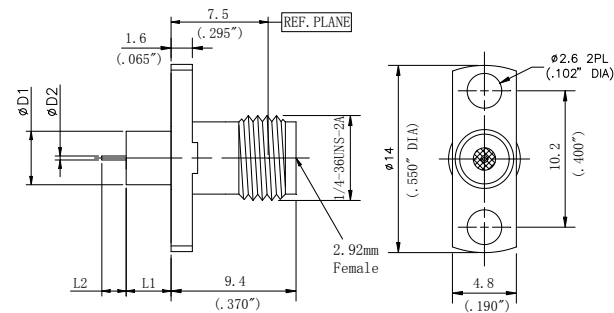

Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360M0403F05	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360M0503F05	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D360M1105F05	4mm/0.158 "	0.6mm/0.024 "	10.1mm/0.398 "	1.27mm/0.050 "

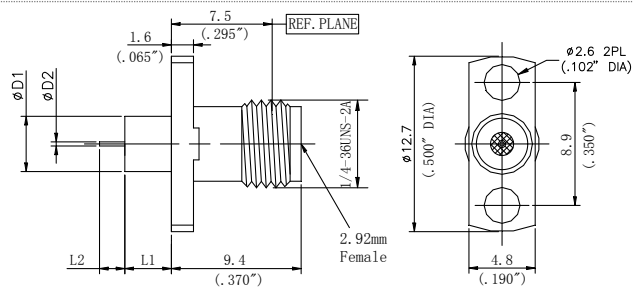


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360M0403F06	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360M0503F06	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D360M1105F06	4mm/0.158 "	0.6mm/0.024 "	10.1mm/0.398 "	1.27mm/0.050 "

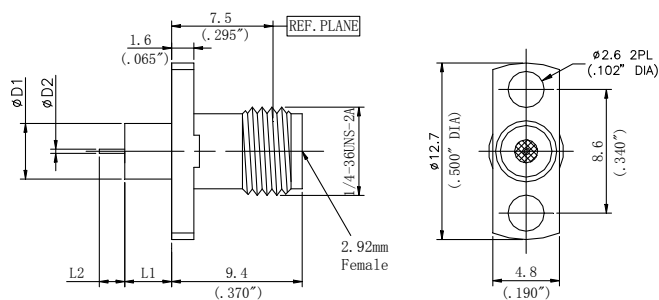


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360M0403F07	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360M0503F07	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D360M1105F07	4mm/0.158 "	0.6mm/0.024 "	10.1mm/0.398 "	1.27mm/0.050 "


✧ 2.92mm Series Thread-in Connectors

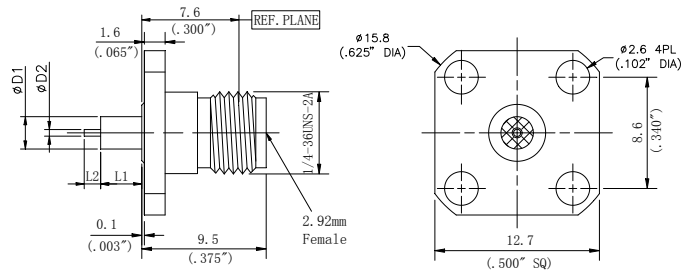


Part no.	ΦD1	ΦD2	L1	L2
D360P0403F01	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360P0503F01	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

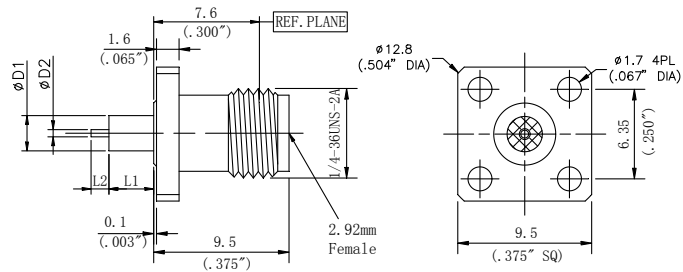


Part no.	ΦD1	ΦD2	L1	L2
D360P0403F02	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360P0503F02	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

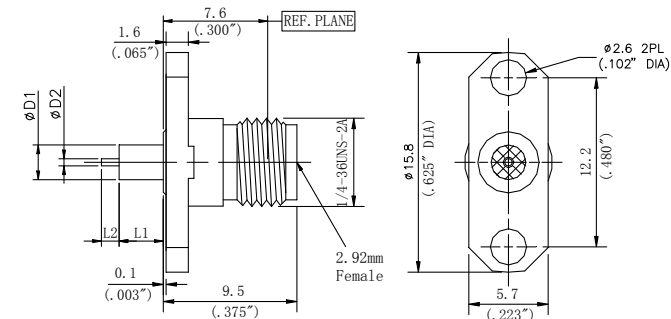


Part no.	ΦD1	ΦD2	L1	L2
D360P0403F04	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360P0503F04	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

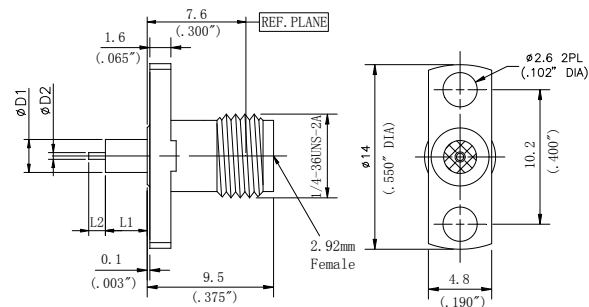

Part no.	ΦD1	ΦD2	L1	L2
D360P0403F05	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360P0503F05	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

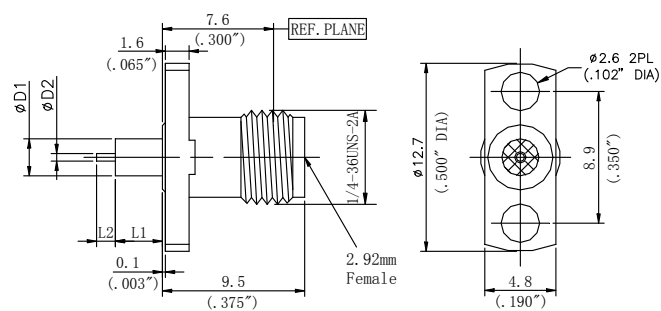


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360P0403F06	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360P0503F06	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

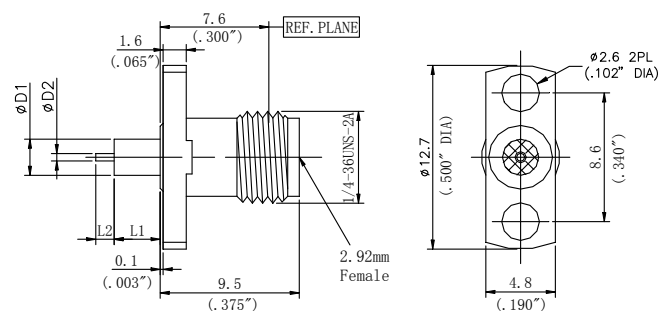


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D360P0403F07	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D360P0503F07	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "


✧ 2.92mm Series Airline Bulkhead connectors

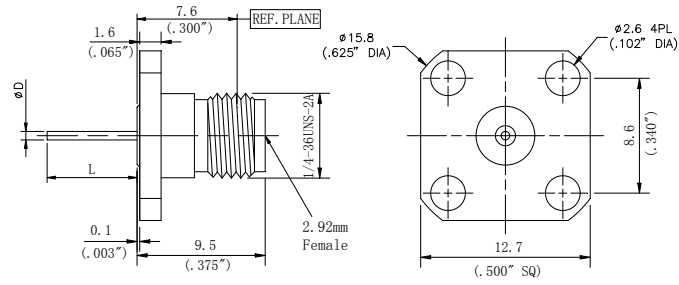


Part no.	ΦD	L
D360D25F01-430	0.64mm/0.025 "	10.92mm/0.43 "
D360D25F01-269	0.64mm/0.025 "	6.84mm/0.269 "
D360D12F01-276	0.30mm/0.012 "	7mm/0.276 "
D360D30F01-1181	0.75mm/0.030 "	30mm/1.181 "

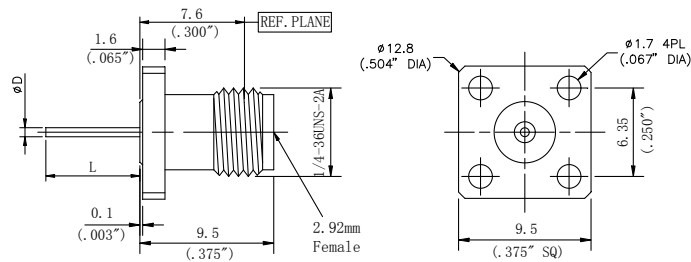


Part no.	ΦD	L
D360D25F02-430	0.64mm/0.025 "	10.92mm/0.43 "
D360D25F02-269	0.64mm/0.025 "	6.84mm/0.269 "
D360D12F02-276	0.30mm/0.012 "	7mm/0.276 "
D360D30F02-1181	0.75mm/0.030 "	30mm/1.181 "

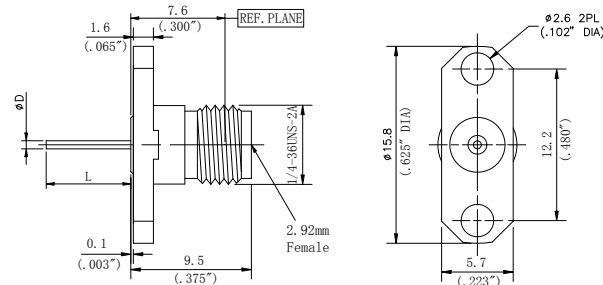


Part no.	ΦD	L
D360D25F04-430	0.64mm/0.025 "	10.92mm/0.43 "
D360D25F04-269	0.64mm/0.025 "	6.84mm/0.269 "
D360D12F04-276	0.30mm/0.012 "	7mm/0.276 "
D360D30F04-1181	0.75mm/0.030 "	30mm/1.181 "

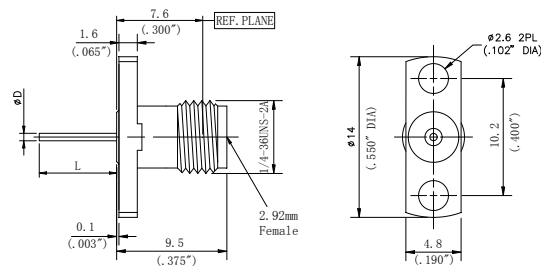



Part no.	ΦD	L
D360D25F05-430	0.64mm/0.025 "	10.92mm/0.43 "
D360D25F05-269	0.64mm/0.025 "	6.84mm/0.269 "
D360D12F05-276	0.30mm/0.012 "	7mm/0.276 "
D360D30F05-1181	0.75mm/0.030 "	30mm/1.181 "

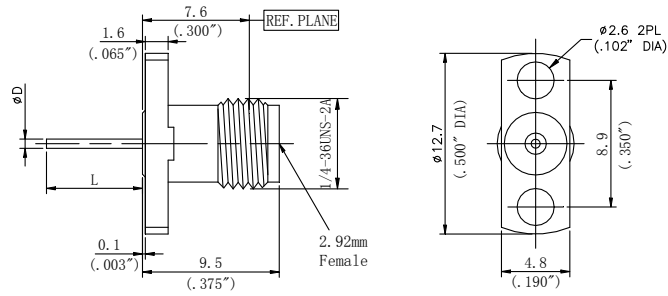


Part no.	ΦD	L
D360D25F06-430	0.64mm/0.025 "	10.92mm/0.43 "
D360D25F06-269	0.64mm/0.025 "	6.84mm/0.269 "
D360D12F06-276	0.30mm/0.012 "	7mm/0.276 "
D360D30F06-1181	0.75mm/0.030 "	30mm/1.181 "

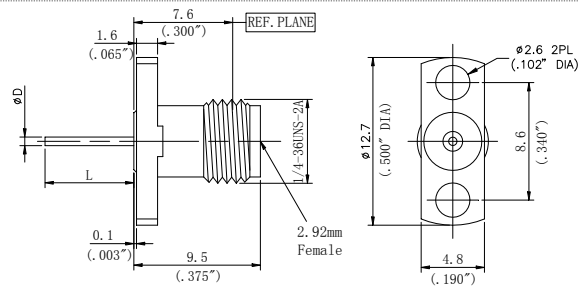


Part no.	ΦD	L
D360D25F07-430	0.64mm/0.025 "	10.92mm/0.43 "
D360D25F07-269	0.64mm/0.025 "	6.84mm/0.269 "
D360D12F07-276	0.30mm/0.012 "	7mm/0.276 "
D360D30F07-1181	0.75mm/0.030 "	30mm/1.181 "

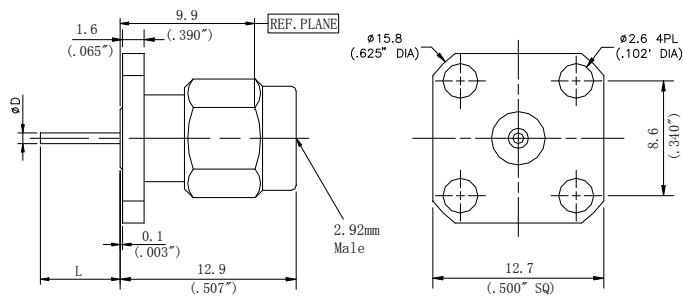


Part no.	ΦD	L
D361D25F01-430	0.64mm/0.025 "	10.92mm/0.430 "
D361D25F01-269	0.64mm/0.025 "	6.84mm/0.269 "

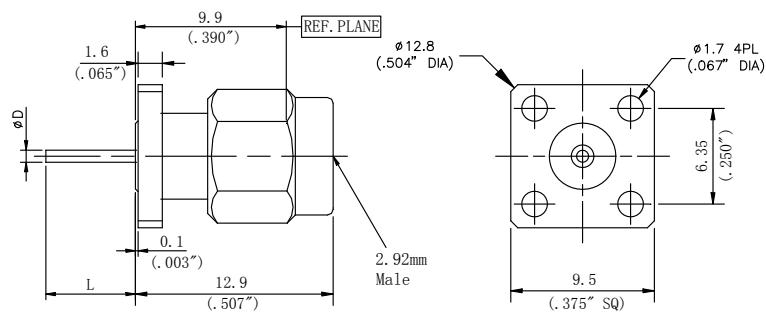


Part no.	ΦD	L
D361D25F02-430	0.64mm/0.025 "	10.92mm/0.430 "
D361D25F02-269	0.64mm/0.025 "	6.84mm/0.269 "

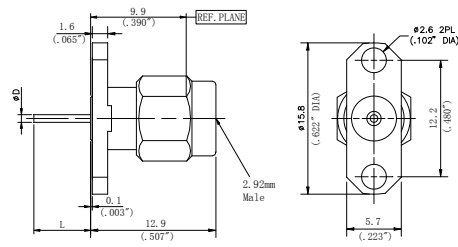

Part no.	ΦD	L
D361D25F04-430	0.64mm/0.025 "	10.92mm/0.430 "
D361D25F04-269	0.64mm/0.025 "	6.84mm/0.269 "

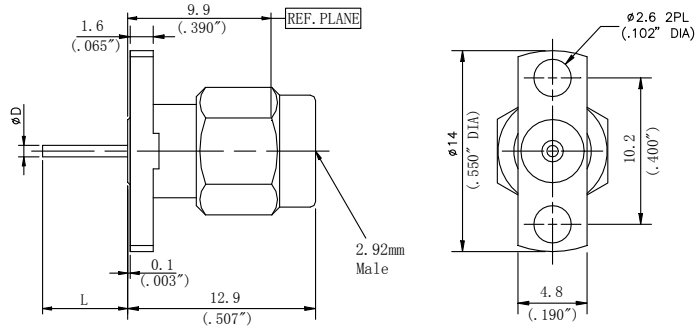


Part no.	ΦD	L
D361D25F05-430	0.64mm/0.025 "	10.92mm/0.430 "
D361D25F05-269	0.64mm/0.025 "	6.84mm/0.269 "

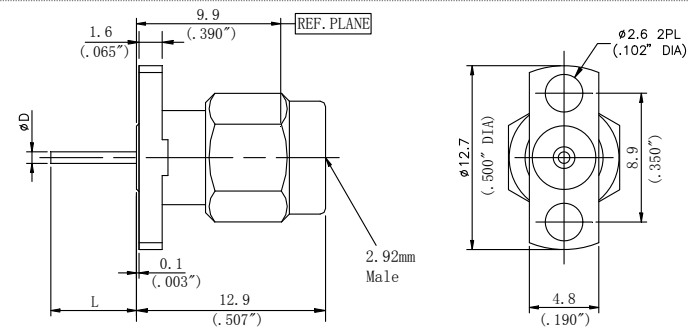


Part no.	ΦD	L
D361D25F06-430	0.64mm/0.025 "	10.92mm/0.430 "
D361D25F06-269	0.64mm/0.025 "	6.84mm/0.269 "

✧ 2.92mm Series PCB Connectors

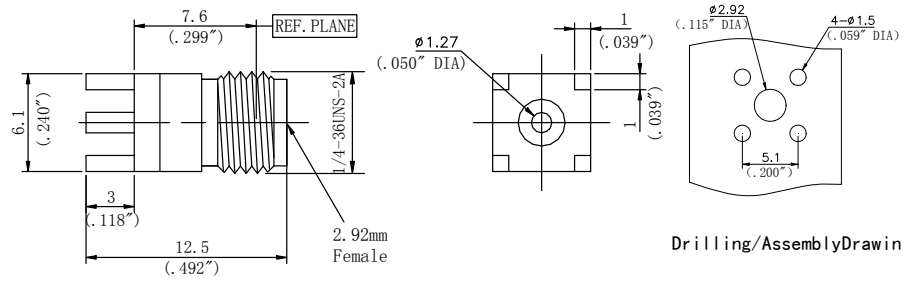

Part no.
D360B50H01-118

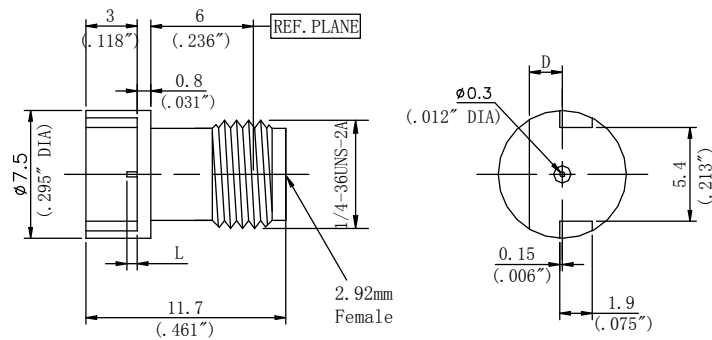


Part no.	D	L	Suitable sheet thickness
D360B12E01-023	1.93mm/0.076"	0.6mm/0.023"	1.78mm/0.070"
D360B12E02-023	0.76mm/0.030"	0.6mm/0.023"	0.61mm/0.024"
D360B12E03-023	1.02mm/0.040"	0.6mm/0.023"	0.87mm/0.034"



2.92mm connector

✧ 2.92mm Series Bulkhead Thread-in Connectors

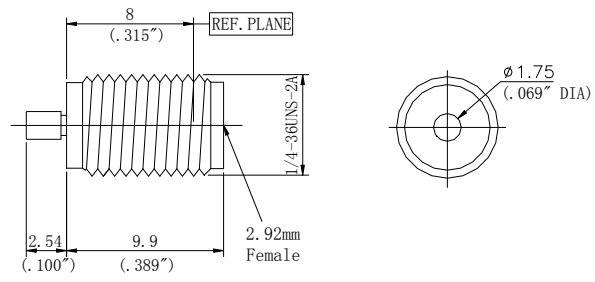

Part no.
D360L69Y01-100

2.4mm Connector Series (DC~50GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~50GHz

VSWR:

DC~50GHz... 1.15:1 (Max)

Contact resistance: Centre Conductor ≤ 3.0mΩ
Outer Conductor ≤ 2.0mΩ

Insulation resistance: ≥ 3000MΩ

Withstanding Voltage: 750V

Durability: 500 Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI or PEI & PTFE

Interface Standards

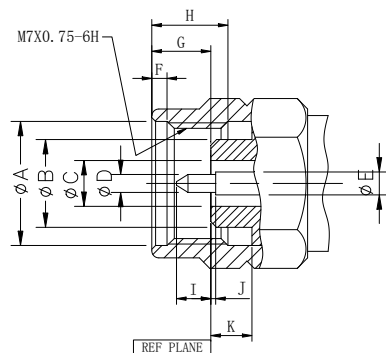


2.4mm Male				
	mm		Inch	
	Min	Max	Min	Max
A	7.01	7.11	0.276	0.280
B	4.72	4.75	0.186	0.187
C	2.39	2.41	0.094	0.095
D	0.50	0.52	0.0196	0.0206
E	1.03	1.05	0.0405	0.0415
F	0.51	0.76	0.020	0.030
G	1.85	2.45	0.073	0.105
H	4.37	4.65	0.172	0.183
I	1.35	1.45	0.053	0.057
J	0	0.076	0	0.003
K	3.38	3.48	0.133	0.137

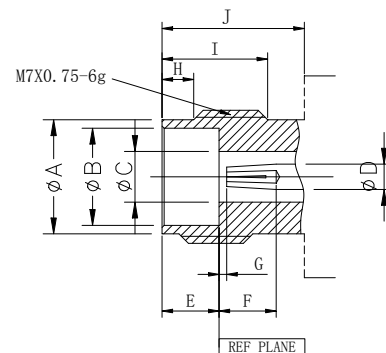


2.4mm Female				
	mm		Inch	
	Min	Max	Min	Max
A	5.79	5.89	0.228	0.232
B	4.77	4.795	0.1878	0.1888
C	2.39	2.41	0.094	0.095
D	1.03	1.05	0.0406	0.0414
E	3.00	3.10	0.118	0.122
F	2.65	—	0.1043	—
G	0	0.076	0	0.003
H	1.37	1.63	0.054	0.064
I	4.80	5.05	0.189	0.199
J	6	—	0.2362	—

Interface Per IEC 61169


		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09F01</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12F01</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20F01</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09F01	0.23mm/0.009"	D370S12F01	0.30mm/0.012"	D370S20F01	0.51mm/0.020"
Part no.	ΦD									
D370S09F01	0.23mm/0.009"									
D370S12F01	0.30mm/0.012"									
D370S20F01	0.51mm/0.020"									
		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09F02</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12F02</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20F02</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09F02	0.23mm/0.009"	D370S12F02	0.30mm/0.012"	D370S20F02	0.51mm/0.020"
Part no.	ΦD									
D370S09F02	0.23mm/0.009"									
D370S12F02	0.30mm/0.012"									
D370S20F02	0.51mm/0.020"									
		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09F04</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12F04</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20F04</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09F04	0.23mm/0.009"	D370S12F04	0.30mm/0.012"	D370S20F04	0.51mm/0.020"
Part no.	ΦD									
D370S09F04	0.23mm/0.009"									
D370S12F04	0.30mm/0.012"									
D370S20F04	0.51mm/0.020"									
		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09F05</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12F05</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20F05</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09F05	0.23mm/0.009"	D370S12F05	0.30mm/0.012"	D370S20F05	0.51mm/0.020"
Part no.	ΦD									
D370S09F05	0.23mm/0.009"									
D370S12F05	0.30mm/0.012"									
D370S20F05	0.51mm/0.020"									
		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09F06</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12F06</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20F06</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09F06	0.23mm/0.009"	D370S12F06	0.30mm/0.012"	D370S20F06	0.51mm/0.020"
Part no.	ΦD									
D370S09F06	0.23mm/0.009"									
D370S12F06	0.30mm/0.012"									
D370S20F06	0.51mm/0.020"									
		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09Y01</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12Y01</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20Y01</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09Y01	0.23mm/0.009"	D370S12Y01	0.30mm/0.012"	D370S20Y01	0.51mm/0.020"
Part no.	ΦD									
D370S09Y01	0.23mm/0.009"									
D370S12Y01	0.30mm/0.012"									
D370S20Y01	0.51mm/0.020"									
		<table> <tr> <th>Part no.</th><th>ΦD</th></tr> <tr> <td>D370S09Y02</td><td>0.23mm/0.009"</td></tr> <tr> <td>D370S12Y02</td><td>0.30mm/0.012"</td></tr> <tr> <td>D370S20Y02</td><td>0.51mm/0.020"</td></tr> </table>	Part no.	ΦD	D370S09Y02	0.23mm/0.009"	D370S12Y02	0.30mm/0.012"	D370S20Y02	0.51mm/0.020"
Part no.	ΦD									
D370S09Y02	0.23mm/0.009"									
D370S12Y02	0.30mm/0.012"									
D370S20Y02	0.51mm/0.020"									

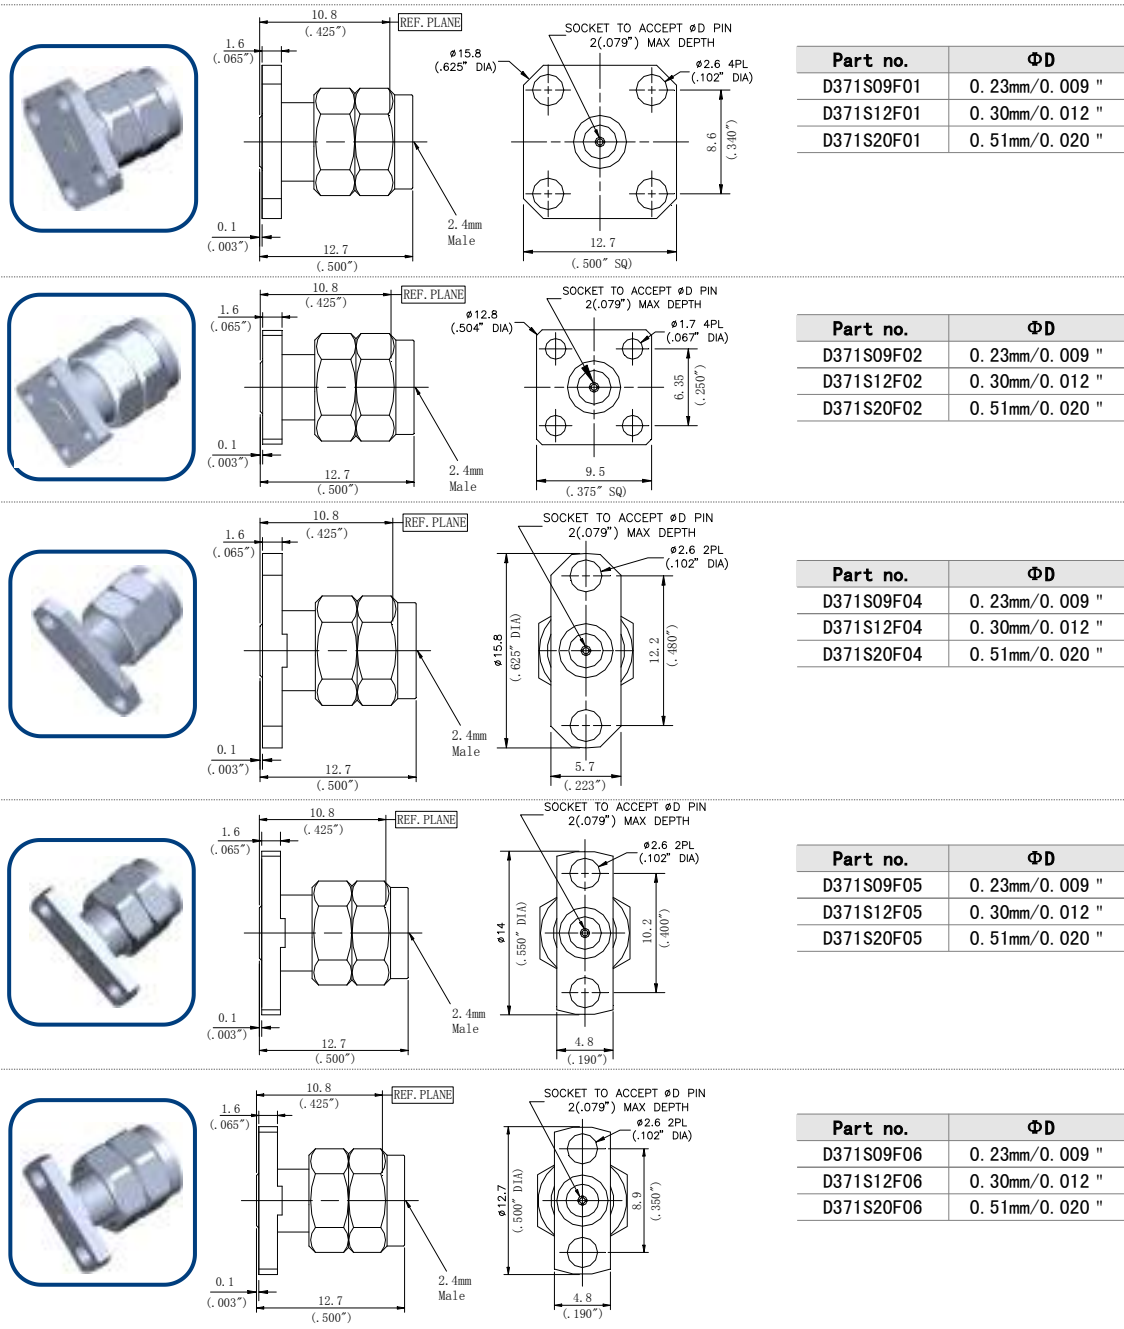


✧ 2.4mm Series Bulkhead Flange Connectors

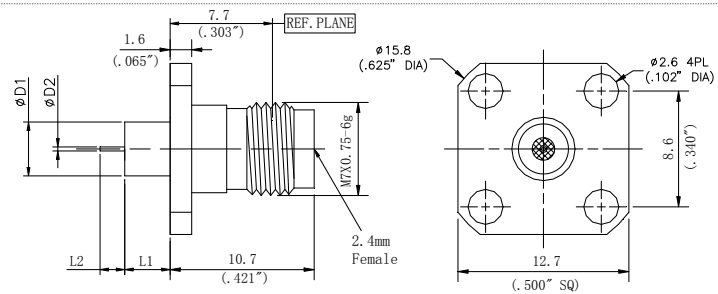


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D370M0403F01	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370M0503F01	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

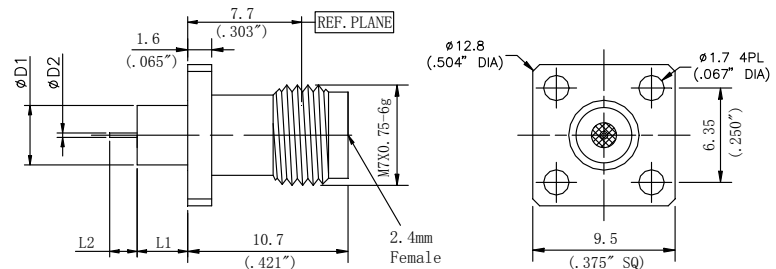


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D370M0403F02	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370M0503F02	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

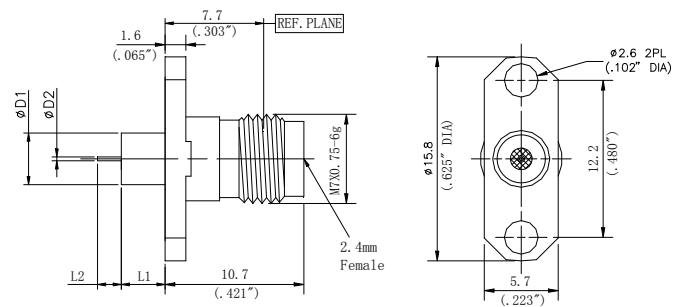

Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D370M0403F04	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370M0503F04	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

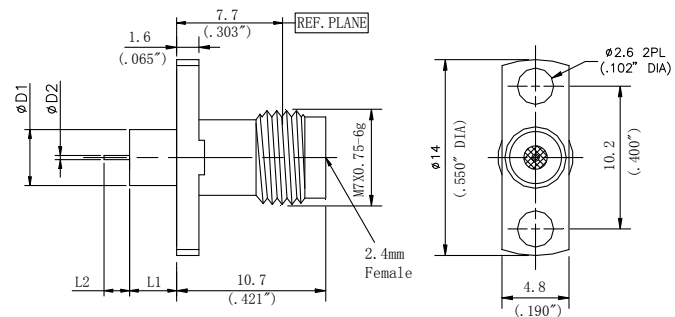


Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D370M0403F05	4mm/0.158 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370M0503F05	4mm/0.158 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "

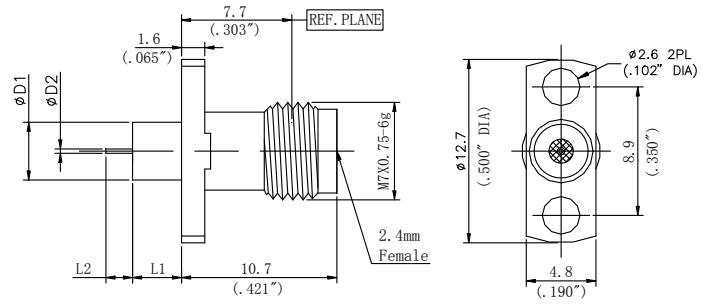


Part no.	$\phi D1$	$\phi D2$	L1	L2
D370M0403F06	4mm/0.158"	0.3mm/0.012"	1.4mm/0.055"	1.5mm/0.059"
D370M0503F06	4mm/0.158"	0.3mm/0.012"	3mm/0.118"	1.5mm/0.059"


✧ 2.4mm Series Thread-in Connectors

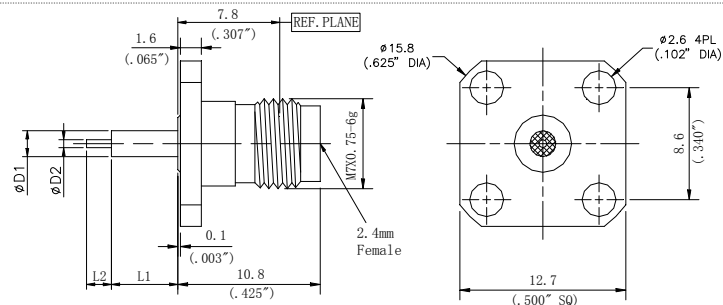


Part no.	ΦD1	ΦD2	L1	L2
D370P0403F01	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370P0503F01	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D370P0605F01	2.0mm/0.078 "	0.6mm/0.024 "	6.35mm/0.250 "	1.27mm/0.05 "
D370P1221F01	2.0mm/0.078 "	0.6mm/0.024 "	5.1mm/0.200 "	1.9mm/0.075 "

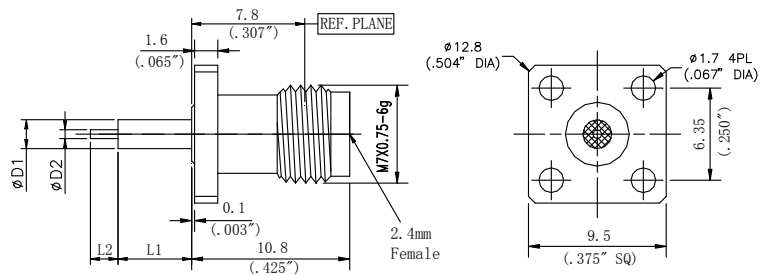


Part no.	ΦD1	ΦD2	L1	L2
D370P0403F02	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370P0503F02	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D370P0605F02	2.0mm/0.078 "	0.6mm/0.024 "	6.35mm/0.250 "	1.27mm/0.05 "
D370P1221F02	2.0mm/0.078 "	0.6mm/0.024 "	5.1mm/0.200 "	1.9mm/0.075 "

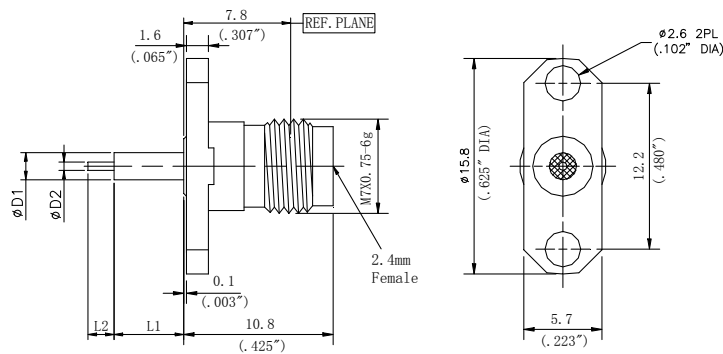

Part no.	ΦD1	ΦD2	L1	L2
D370P0403F04	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370P0503F04	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D370P0605F04	2.0mm/0.078 "	0.6mm/0.024 "	6.35mm/0.250 "	1.27mm/0.05 "
D370P1221F04	2.0mm/0.078 "	0.6mm/0.024 "	5.1mm/0.200 "	1.9mm/0.075 "

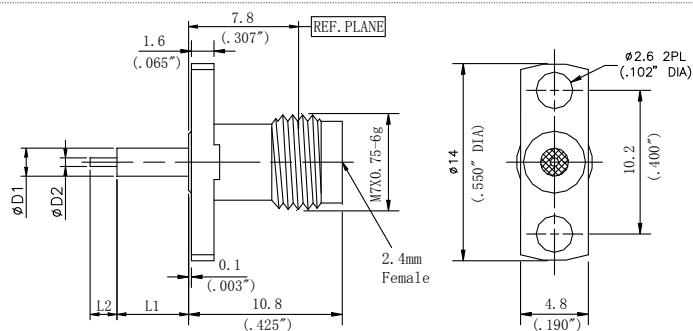


Part no.	ΦD1	ΦD2	L1	L2
D370P0403F05	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370P0503F05	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D370P0605F05	2.0mm/0.078 "	0.6mm/0.024 "	6.35mm/0.250 "	1.27mm/0.05 "
D370P1221F05	2.0mm/0.078 "	0.6mm/0.024 "	5.1mm/0.200 "	1.9mm/0.075 "

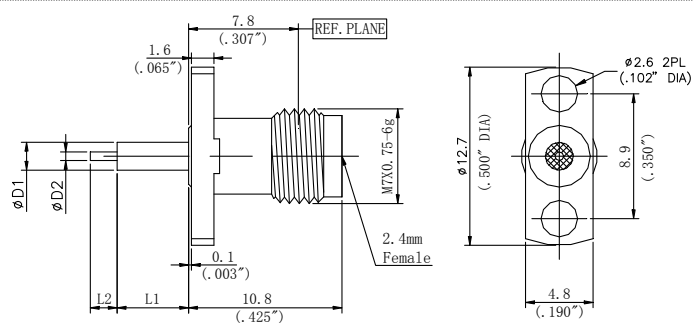


Part no.	ΦD1	ΦD2	L1	L2
D370P0403F06	1.67mm/0.066 "	0.3mm/0.012 "	1.4mm/0.055 "	1.5mm/0.059 "
D370P0503F06	1.67mm/0.066 "	0.3mm/0.012 "	3mm/0.118 "	1.5mm/0.059 "
D370P0605F06	2.0mm/0.078 "	0.6mm/0.024 "	6.35mm/0.250 "	1.27mm/0.05 "
D370P1221F06	2.0mm/0.078 "	0.6mm/0.024 "	5.1mm/0.200 "	1.9mm/0.075 "


✧ 2.4mm Series Airline Bulkhead Connectors

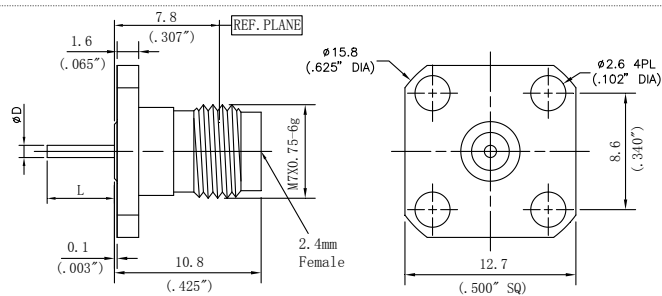


Part no.	ΦD	L
D370D25F01-394	0.64mm/0.025 "	10mm/0.394 "
D370D25F01-269	0.64mm/0.025 "	6.84mm/0.269 "
D370D29F01-354	0.75mm/0.029 "	9mm/0.354 "
D370D34F01-344	0.86mm/0.034 "	8.75mm/0.344 "
D370D39F01-216	1mm/0.04 "	5.5mm/0.216 "
D370D41F01-250	1.04mm/0.041 "	6.34mm/0.250 "
D370D47F01-118	1.2mm/0.047 "	3mm/0.118 "

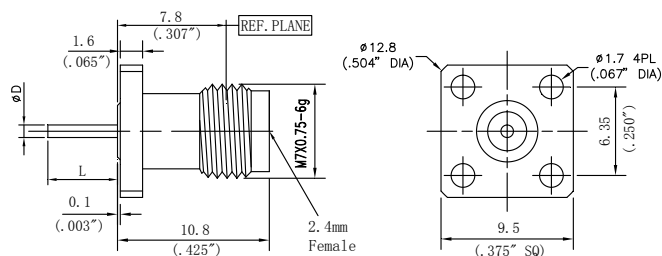


Part no.	ΦD	L
D370D25F02-394	0.64mm/0.025 "	10mm/0.394 "
D370D25F02-269	0.64mm/0.025 "	6.84mm/0.269 "
D370D29F02-354	0.75mm/0.029 "	9mm/0.354 "
D370D34F02-344	0.86mm/0.034 "	8.75mm/0.344 "
D370D39F02-216	1mm/0.04 "	5.5mm/0.216 "
D370D41F02-250	1.04mm/0.041 "	6.34mm/0.250 "
D370D47F02-118	1.2mm/0.047 "	3mm/0.118 "

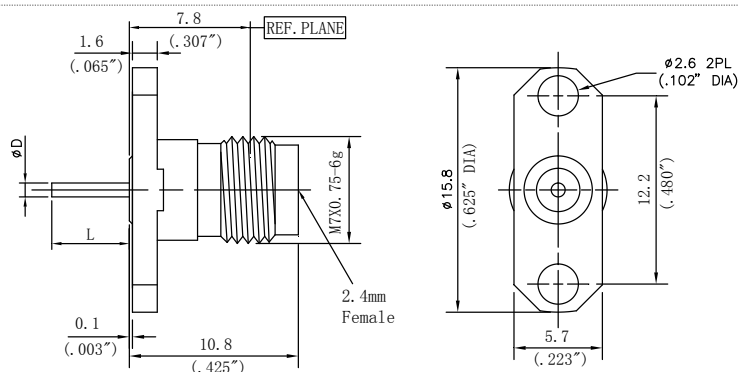


Part no.	ΦD	L
D370D25F04-394	0.64mm/0.025 "	10mm/0.394 "
D370D25F04-269	0.64mm/0.025 "	6.84mm/0.269 "
D370D29F04-354	0.75mm/0.029 "	9mm/0.354 "
D370D34F04-344	0.86mm/0.034 "	8.75mm/0.344 "
D370D39F04-216	1mm/0.04 "	5.5mm/0.216 "
D370D41F04-250	1.04mm/0.041 "	6.34mm/0.250 "
D370D47F04-118	1.2mm/0.047 "	3mm/0.118 "

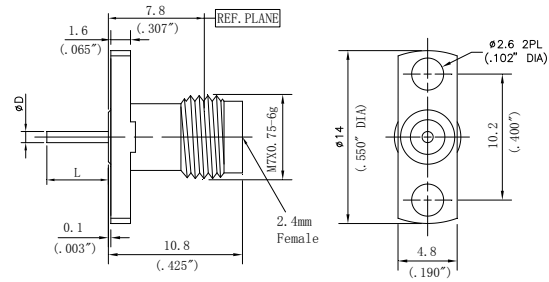


Part no.	ΦD	L
D370D25F05-394	0.64mm/0.025 "	10mm/0.394 "
D370D25F05-269	0.64mm/0.025 "	6.84mm/0.269 "
D370D29F05-354	0.75mm/0.029 "	9mm/0.354 "
D370D34F05-344	0.86mm/0.034 "	8.75mm/0.344 "
D370D39F05-216	1mm/0.04 "	5.5mm/0.216 "
D370D41F05-250	1.04mm/0.041 "	6.34mm/0.250 "
D370D47F05-118	1.2mm/0.047 "	3mm/0.118 "

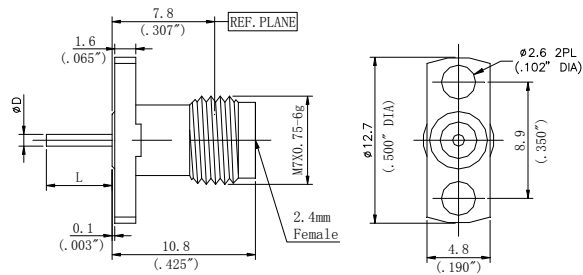


Part no.	ΦD	L
D370D25F06-394	0.64mm/0.025 "	10mm/0.394 "
D370D25F06-269	0.64mm/0.025 "	6.84mm/0.269 "
D370D29F06-354	0.75mm/0.029 "	9mm/0.354 "
D370D34F06-344	0.86mm/0.034 "	8.75mm/0.344 "
D370D39F06-216	1mm/0.04 "	5.5mm/0.216 "
D370D41F06-250	1.04mm/0.041 "	6.34mm/0.250 "
D370D47F06-118	1.2mm/0.047 "	3mm/0.118 "

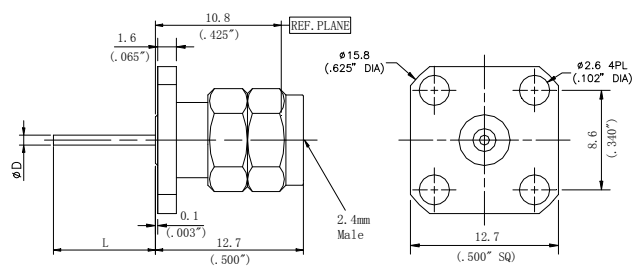


Part no.	ΦD	L
D371D25F01-394	0.64mm/0.025 "	10mm/0.394 "
D371D34F01-344	0.86mm/0.034 "	8.75mm/0.344 "

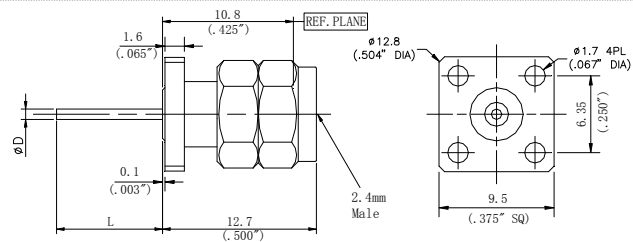


Part no.	ΦD	L
D371D25F02-394	0.64mm/0.025 "	10mm/0.394 "
D371D34F02-344	0.86mm/0.034 "	8.75mm/0.344 "

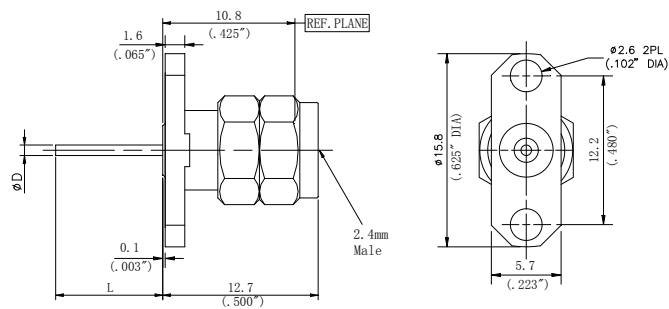

Part no.	ΦD	L
D371D25F04-394	0.64mm/0.025 "	10mm/0.394 "
D371D34F04-344	0.86mm/0.034 "	8.75mm/0.344 "

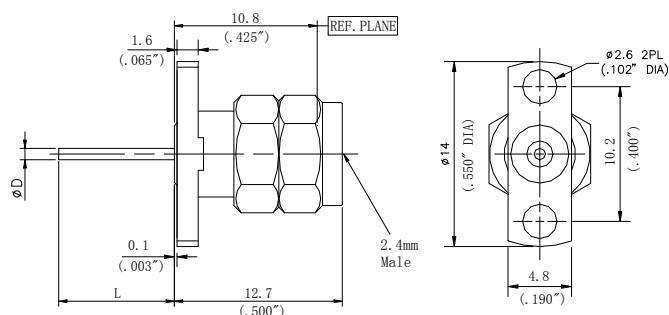

Part no.	ΦD	L
D371D25F05-394	0.64mm/0.025 "	10mm/0.394 "
D371D34F05-344	0.86mm/0.034 "	8.75mm/0.344 "


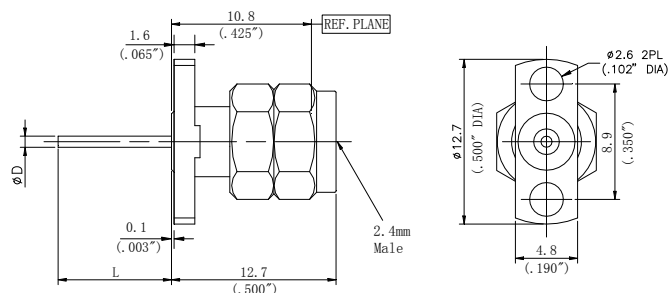


Part no.	ΦD	L
D371D25F06-394	0.64mm/0.025 "	10mm/0.394 "
D371D34F06-344	0.86mm/0.034 "	8.75mm/0.344 "

1.85mm Connector Series (DC~65GHz)

Performance Features	Materials/Finishes
Impedance: 50Ω	Housing: Type 303 Stainless Steel—Polished&Passivated
Frequency Range: DC~65GHz	Center Contact: Beryllium copper Plated Gold (Per MIL-G-45204)
VSWR:	Insulators: PEI
DC~65GHz--- 1.25:1 (Max)	
Contact resistance : Centre Conductor ≤ 3.0mΩ	
Outer Conductor ≤ 2.5mΩ	
Insulation resistance: ≥ 3000MΩ	
Withstanding Voltage: 500V	
Durability: 500 Cycles	
Operating Temperature: -55℃~+165℃	

Interface Standards











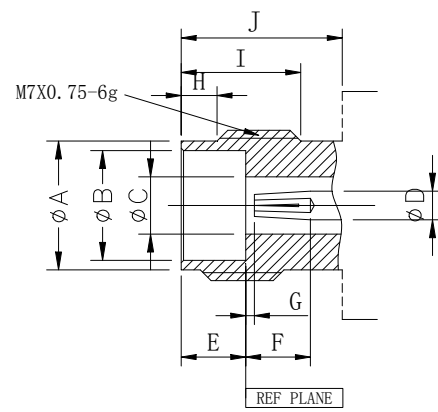
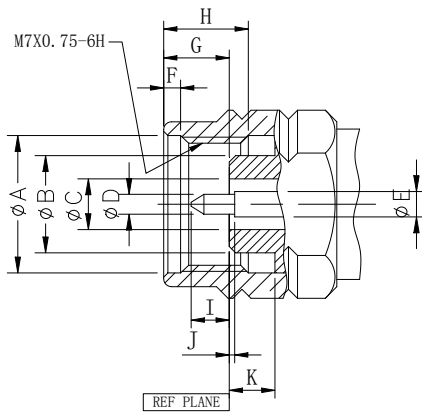



1.85mm Male				
	mm		Inch	
	Min	Max	Min	Max
A	7.01	7.11	0.276	0.280
B	4.725	4.75	0.186	0.187
C	1.84	1.86	0.07233	0.0733
D	0.50	0.52	0.0196	0.0206
E	0.7909	0.816	0.0311	0.0321
F	0.51	0.76	0.020	0.030
G	1.85	2.45	0.073	0.096
H	4.37	4.62	0.172	0.182
I	1.35	1.45	0.053	0.057
J	0	0.076	—	0.003
K	3.38	3.48	0.133	0.137

1.85mm Female				
	mm		Inch	
	Min	Max	Min	Max
A	5.79	5.89	0.228	0.232
B	4.77	4.795	0.1878	0.1888
C	1.84	1.86	0.07233	0.07333
D	0.79	0.82	0.0311	0.0321
E	3.00	3.10	0.118	0.122
F	2.64	—	0.104	—
G	0	0.076	0	0.003
H	1.37	1.63	0.054	0.064
I	4.80	5.05	0.189	0.199
J	6	—	0.236	—

Interface Per IEC 61169

✧ 1.85mm Series Field Replaceable Flange Connectors

	 8.3 (.325") REF. PLANE 1.6 (.065") 0.1 (.003") 11.3 (.445") M7X0.75-6g 1.85mm Female	 SOCKET TO ACCEPT ØD PIN 2(.079") MAX DEPTH Ø15.8 (.625" DIA) Ø2.6 4PL (.102" DIA) 8.6 (.340") 12.7 (.500" SQ)	<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D380S09F01</td><td>0.23mm/0.009 "</td></tr><tr><td>D380S12F01</td><td>0.30mm/0.012 "</td></tr></table>	Part no.	ΦD	D380S09F01	0.23mm/0.009 "	D380S12F01	0.30mm/0.012 "
Part no.	ΦD								
D380S09F01	0.23mm/0.009 "								
D380S12F01	0.30mm/0.012 "								
	 8.3 (.325") REF. PLANE 1.6 (.065") 0.1 (.003") 11.3 (.445") M7X0.75-6g 1.85mm Female	 SOCKET TO ACCEPT ØD PIN 2(.079") MAX DEPTH Ø15.8 (.625" DIA) Ø2.6 2PL (.102" DIA) 12.2 (.480") 5.7 (.223")	<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D380S09F04</td><td>0.23mm/0.009 "</td></tr><tr><td>D380S12F04</td><td>0.30mm/0.012 "</td></tr></table>	Part no.	ΦD	D380S09F04	0.23mm/0.009 "	D380S12F04	0.30mm/0.012 "
Part no.	ΦD								
D380S09F04	0.23mm/0.009 "								
D380S12F04	0.30mm/0.012 "								
	 8.3 (.325") REF. PLANE 1.6 (.065") 0.1 (.003") 11.3 (.445") M7X0.75-6g 1.85mm Female	 SOCKET TO ACCEPT ØD PIN 2(.079") MAX DEPTH Ø14 (.550" DIA) Ø2.6 2PL (.102" DIA) 10.2 (.400") 4.8 (.190")	<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D380S09F05</td><td>0.23mm/0.009 "</td></tr><tr><td>D380S12F05</td><td>0.30mm/0.012 "</td></tr></table>	Part no.	ΦD	D380S09F05	0.23mm/0.009 "	D380S12F05	0.30mm/0.012 "
Part no.	ΦD								
D380S09F05	0.23mm/0.009 "								
D380S12F05	0.30mm/0.012 "								
	 8.3 (.325") REF. PLANE 1/4-36UNS-2A Ø5.4 (.213" DIA) 0.1 (.003") 11.3 (.445") M7X0.75-6g 1.85mm Female	 SOCKET TO ACCEPT ØD PIN 2(.079") MAX DEPTH	<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D380S09Y01</td><td>0.23mm/0.009 "</td></tr><tr><td>D380S12Y01</td><td>0.30mm/0.012 "</td></tr></table>	Part no.	ΦD	D380S09Y01	0.23mm/0.009 "	D380S12Y01	0.30mm/0.012 "
Part no.	ΦD								
D380S09Y01	0.23mm/0.009 "								
D380S12Y01	0.30mm/0.012 "								
	 8.3 (.325") REF. PLANE M6X0.75-6g Ø4.83 (.190" DIA) 0.1 (.003") 11.3 (.445") M7X0.75-6g 1.85mm Female	 SOCKET TO ACCEPT ØD PIN 2(.079") MAX DEPTH	<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D380S09Y02</td><td>0.23mm/0.009 "</td></tr><tr><td>D380S12Y02</td><td>0.30mm/0.012 "</td></tr></table>	Part no.	ΦD	D380S09Y02	0.23mm/0.009 "	D380S12Y02	0.30mm/0.012 "
Part no.	ΦD								
D380S09Y02	0.23mm/0.009 "								
D380S12Y02	0.30mm/0.012 "								
	 1.6 (.065") 10.8 (.425") REF. PLANE 0.1 (.003") 12.7 (.500") 1.85mm Male	 SOCKET TO ACCEPT ØD PIN 2(.079") MAX DEPTH Ø15.8 (.625" DIA) Ø2.6 4PL (.102" DIA) 8.6 (.340") 12.7 (.500" SQ)	<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D381S09F01</td><td>0.23mm/0.009 "</td></tr><tr><td>D381S12F01</td><td>0.30mm/0.012 "</td></tr></table>	Part no.	ΦD	D381S09F01	0.23mm/0.009 "	D381S12F01	0.30mm/0.012 "
Part no.	ΦD								
D381S09F01	0.23mm/0.009 "								
D381S12F01	0.30mm/0.012 "								

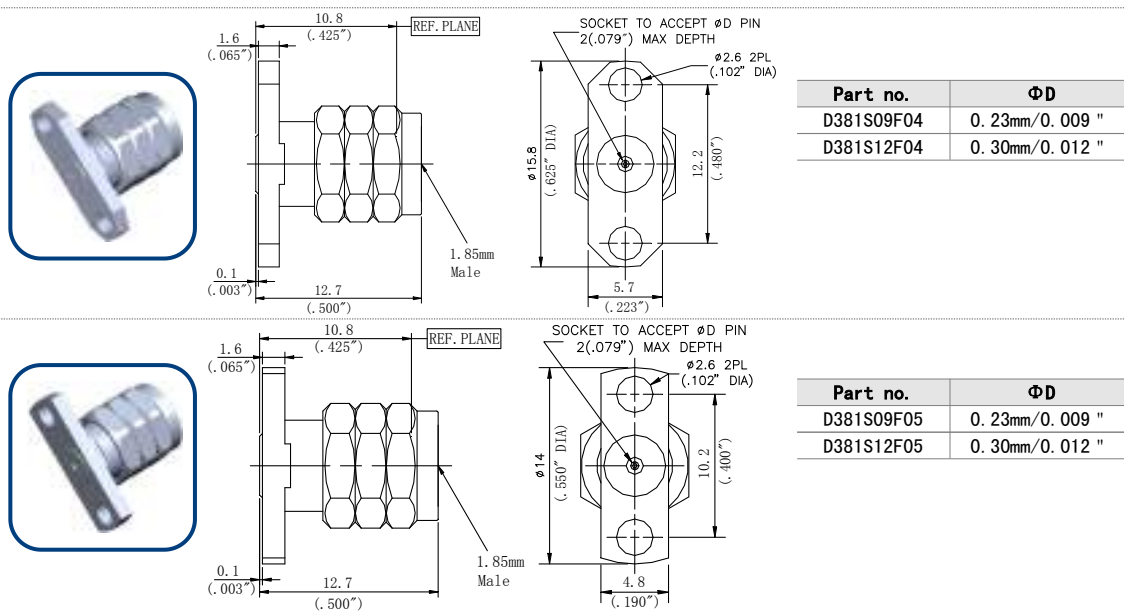



ST N Type Connector Series (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

VSWR:

DC~18GHz... 1.15:1 (Max)

Contact resistance: Centre Conductor ≤ 1.0mΩ

Outer Conductor ≤ 0.2mΩ

Insulation resistance: ≥ 5000MΩ

Withstanding Voltage: 1500V

Durability: 500 Cycles

Operating Temperature: -55°C~+165°C


Materials/Finishes

Housing: Type 303 Stainless Steel – Polished & Passivated


Centre Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PTFE & PEI

Interface Standards

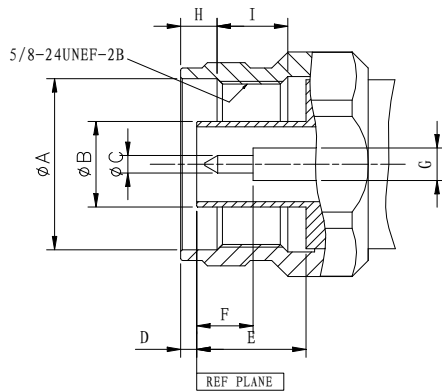








N Type Male				
	mm		Inch	
	Min	Max	Min	Max
A	16.00	—	0.630	—
B	7.98	8.04	0.3140	0.3165
C	1.64	1.67	0.0644	0.0656
D	0.28	1.30	0.011	0.051
E	9.19	9.45	0.362	0.372
F	5.28	5.36	0.208	0.211
G	3.03	3.05	0.1194	0.1200
H	4.01	4.27	0.158	0.168
I	4.50	5.00	0.177	0.197

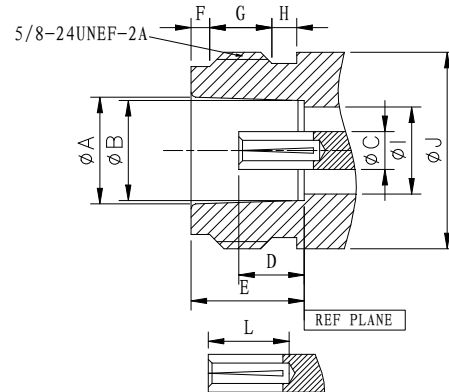


N Type Female				
	mm		Inch	
	Min	Max	Min	Max
A	8.53	8.74	0.336	0.344
B	8.05	8.10	0.317	0.319
C	3.03	3.05	0.1194	0.1200
D	5.18	5.26	0.204	0.207
E	9.07	9.17	0.357	0.361
F	1.19	1.96	0.047	0.077
G	4.57	5.59	0.180	0.220
H	1.02	2.03	0.040	0.080
I	6.99	7.01	0.2753	0.2759
J	—	15.93	—	0.627

Interface Per MIL-STD-348A


✧ N Series Field Replaceable Flange Connectors

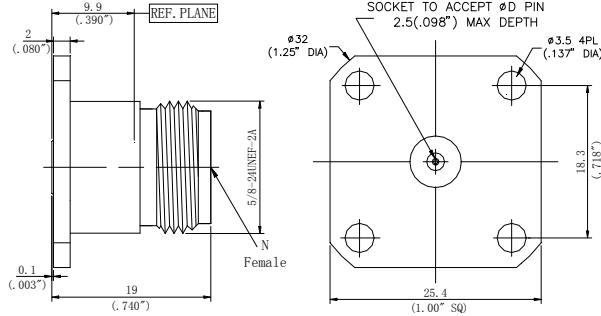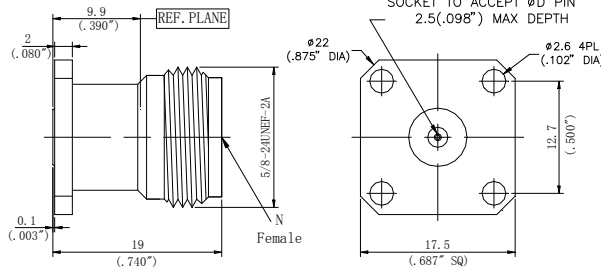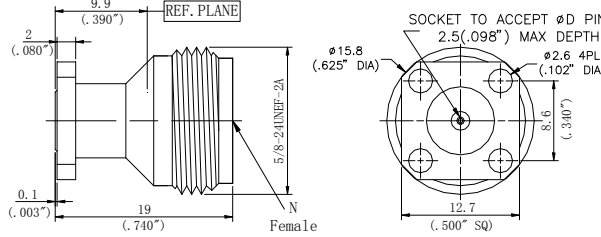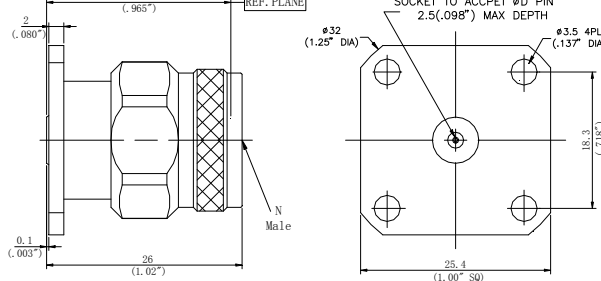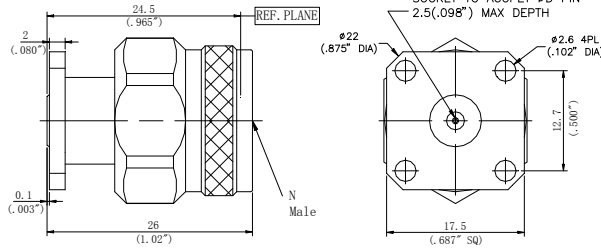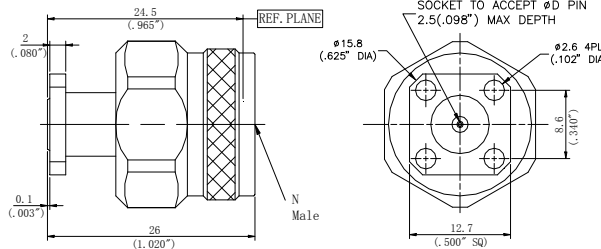		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D340S18F10</td><td>0.46mm/0.018 "</td></tr><tr><td>D340S20F10</td><td>0.51mm/0.020 "</td></tr><tr><td>D340S36F10</td><td>0.91mm/0.036 "</td></tr></table>	Part no.	ΦD	D340S18F10	0.46mm/0.018 "	D340S20F10	0.51mm/0.020 "	D340S36F10	0.91mm/0.036 "
Part no.	ΦD									
D340S18F10	0.46mm/0.018 "									
D340S20F10	0.51mm/0.020 "									
D340S36F10	0.91mm/0.036 "									
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D340S18F09</td><td>0.46mm/0.018 "</td></tr><tr><td>D340S20F09</td><td>0.51mm/0.020 "</td></tr><tr><td>D340S36F09</td><td>0.91mm/0.036 "</td></tr></table>	Part no.	ΦD	D340S18F09	0.46mm/0.018 "	D340S20F09	0.51mm/0.020 "	D340S36F09	0.91mm/0.036 "
Part no.	ΦD									
D340S18F09	0.46mm/0.018 "									
D340S20F09	0.51mm/0.020 "									
D340S36F09	0.91mm/0.036 "									
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D340S18F01</td><td>0.46mm/0.018 "</td></tr><tr><td>D340S20F01</td><td>0.51mm/0.020 "</td></tr><tr><td>D340S36F01</td><td>0.91mm/0.036 "</td></tr></table>	Part no.	ΦD	D340S18F01	0.46mm/0.018 "	D340S20F01	0.51mm/0.020 "	D340S36F01	0.91mm/0.036 "
Part no.	ΦD									
D340S18F01	0.46mm/0.018 "									
D340S20F01	0.51mm/0.020 "									
D340S36F01	0.91mm/0.036 "									
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D341S18F10</td><td>0.46mm/0.018 "</td></tr><tr><td>D341S20F10</td><td>0.51mm/0.020 "</td></tr><tr><td>D341S36F10</td><td>0.91mm/0.036 "</td></tr></table>	Part no.	ΦD	D341S18F10	0.46mm/0.018 "	D341S20F10	0.51mm/0.020 "	D341S36F10	0.91mm/0.036 "
Part no.	ΦD									
D341S18F10	0.46mm/0.018 "									
D341S20F10	0.51mm/0.020 "									
D341S36F10	0.91mm/0.036 "									
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D341S18F09</td><td>0.46mm/0.018 "</td></tr><tr><td>D341S20F09</td><td>0.51mm/0.020 "</td></tr><tr><td>D341S36F09</td><td>0.91mm/0.036 "</td></tr></table>	Part no.	ΦD	D341S18F09	0.46mm/0.018 "	D341S20F09	0.51mm/0.020 "	D341S36F09	0.91mm/0.036 "
Part no.	ΦD									
D341S18F09	0.46mm/0.018 "									
D341S20F09	0.51mm/0.020 "									
D341S36F09	0.91mm/0.036 "									
		<table><tr><th>Part no.</th><th>ΦD</th></tr><tr><td>D341S18F01</td><td>0.46mm/0.018 "</td></tr><tr><td>D341S20F01</td><td>0.51mm/0.020 "</td></tr><tr><td>D341S36F01</td><td>0.91mm/0.036 "</td></tr></table>	Part no.	ΦD	D341S18F01	0.46mm/0.018 "	D341S20F01	0.51mm/0.020 "	D341S36F01	0.91mm/0.036 "
Part no.	ΦD									
D341S18F01	0.46mm/0.018 "									
D341S20F01	0.51mm/0.020 "									
D341S36F01	0.91mm/0.036 "									


✧ N Series Bulkhead Flange Connectors

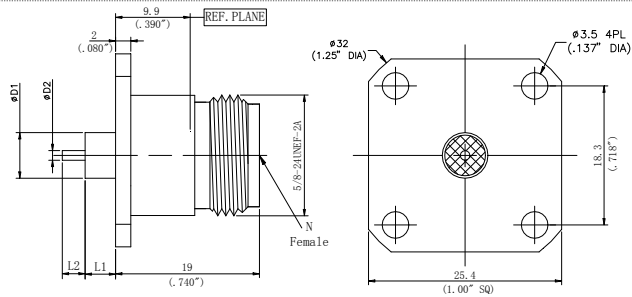


Part no.	ΦD1	ΦD2	L1	L2
D340M0306F10	6mm/0.236 "	1.27mm/0.05 "	4mm/0.158 "	3mm/0.118 "

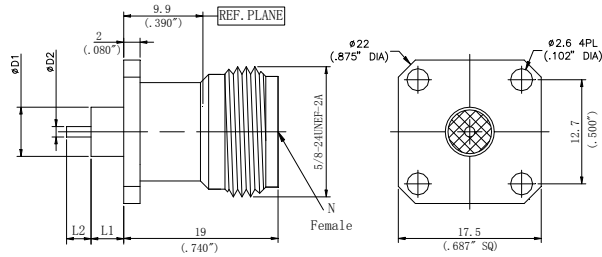


Part no.	ΦD1	ΦD2	L1	L2
D340M0306F09	6mm/0.236 "	1.27mm/0.05 "	4mm/0.158 "	3mm/0.118 "

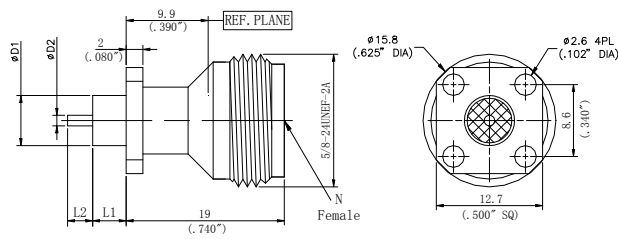

Part no.	ΦD1	ΦD2	L1	L2
D340M0306F01	6mm/0.236 "	1.27mm/0.05 "	4mm/0.158 "	3mm/0.118 "


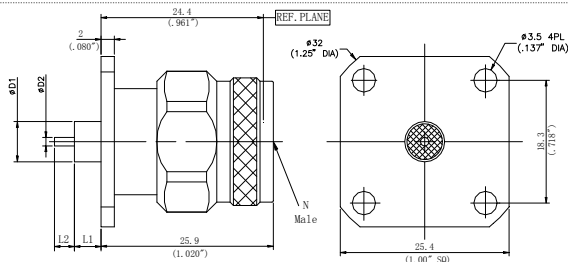


Part no.	ΦD1	ΦD2	L1	L2
D341M0306F10	6mm/0.236 "	1.27mm/0.05 "	4mm/0.158 "	3mm/0.118 "


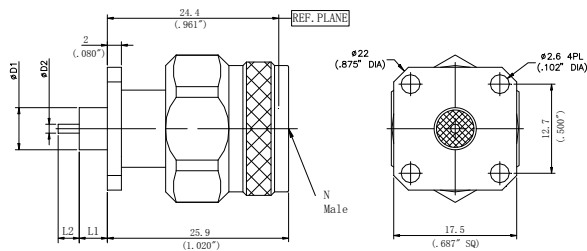


Part no.	ΦD1	ΦD2	L1	L2
D341M0306F09	6mm/0.236 "	1.27mm/0.05 "	4mm/0.158 "	3mm/0.118 "



✧ N Series Straight Connectors

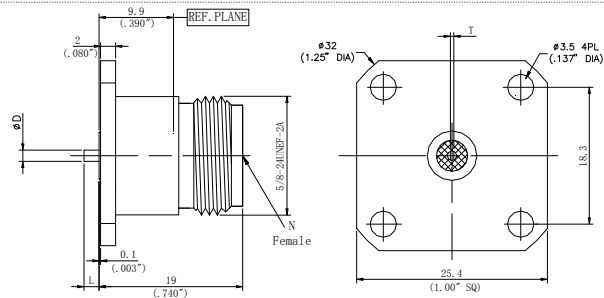



Part no.	ΦD	L	T
D340T15F10	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

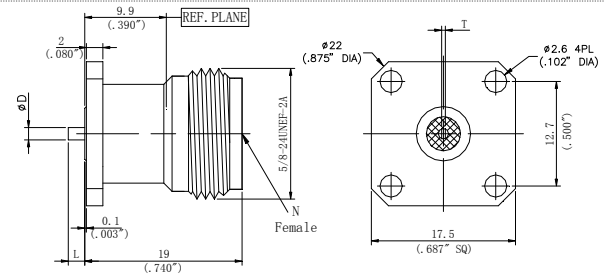



Part no.	ΦD	L	T
D340T15F09	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

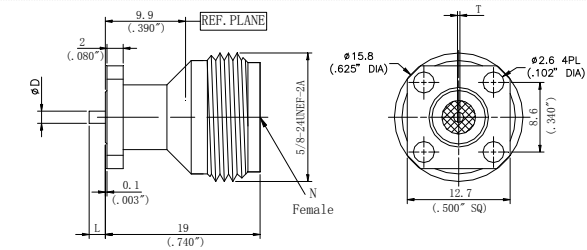

Part no.	ΦD	L	T
D340T15F01	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

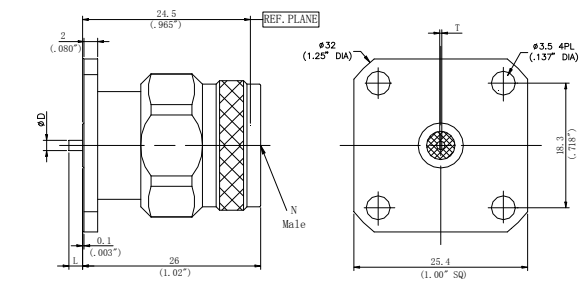



Part no.	ΦD	L	T
D341T15F10	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

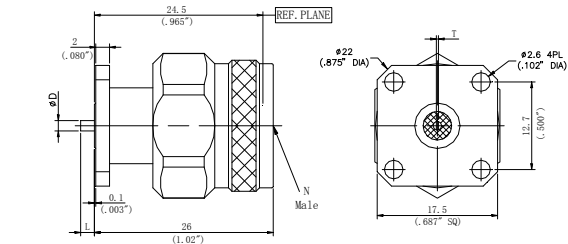

Part no.	ΦD	L	T
D341T15F09	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "



✧ N Series Bulkhead Thread-in Connectors

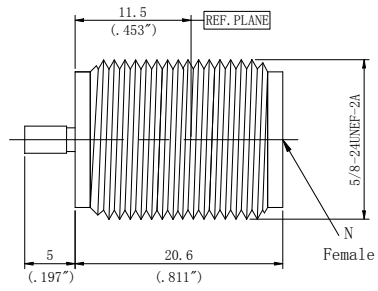

Part no.

D340L106Y03-197

TNCA Type Connector Series (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

VSWR:

DC~18GHz... 1.15:1 (Max)

Contact resistance: Centre Conductor
 $\leq 1.5\text{m}\Omega$

Outer Conductor $\leq 0.2\text{m}\Omega$

Insulation resistance: $\geq 5000\text{M}\Omega$

Withstanding Voltage: 1500V

Durability: 500 Cycles

Operating Temperature: $-55^{\circ}\text{C}\sim+165^{\circ}\text{C}$



Materials/Finishes

Housing: Type 303 Stainless Steel
Polished&Passivated

Centre Conductor: Beryllium
Plated Gold (Per MIL-G-45204)

Insulators: PTFE&PEI

Interface Standards

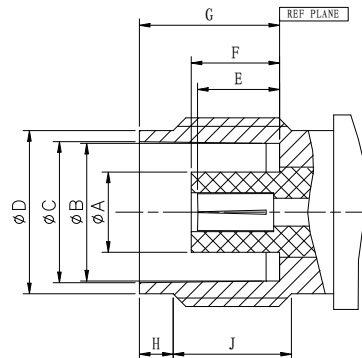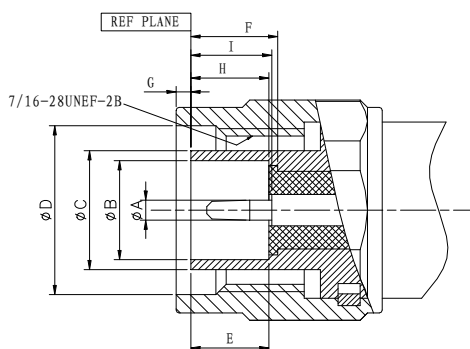


TNCA Male				
	mm		Inch	
	Min	Max	Min	Max
A	1.32	1.37	0.052	0.054
B	6.05	6.15	0.238	0.242
C	7.98	8.08	0.314	0.318
D	11.18	—	0.440	—
E	5.28	—	0.208	—
F	5.38	—	0.212	—
G	5.28	—	0.208	—
H	5.28	—	0.208	—



TNCA Female				
	mm		Inch	
	Min	Max	Min	Max
A	4.62	4.72	0.182	0.186
B	8.10	8.15	0.319	0.321
C	8.31	8.46	0.327	0.333
D	9.60	9.68	0.378	0.381
E	5.03	5.28	0.198	0.208
F	5.03	5.28	0.198	0.208
G	8.31	8.51	0.327	0.335
H	1.73	2.24	0.068	0.088
J	4.75	—	0.187	—

Interface Per MIL-STD-348A



✧ TNCA Series Field Replaceable Flange Connectors

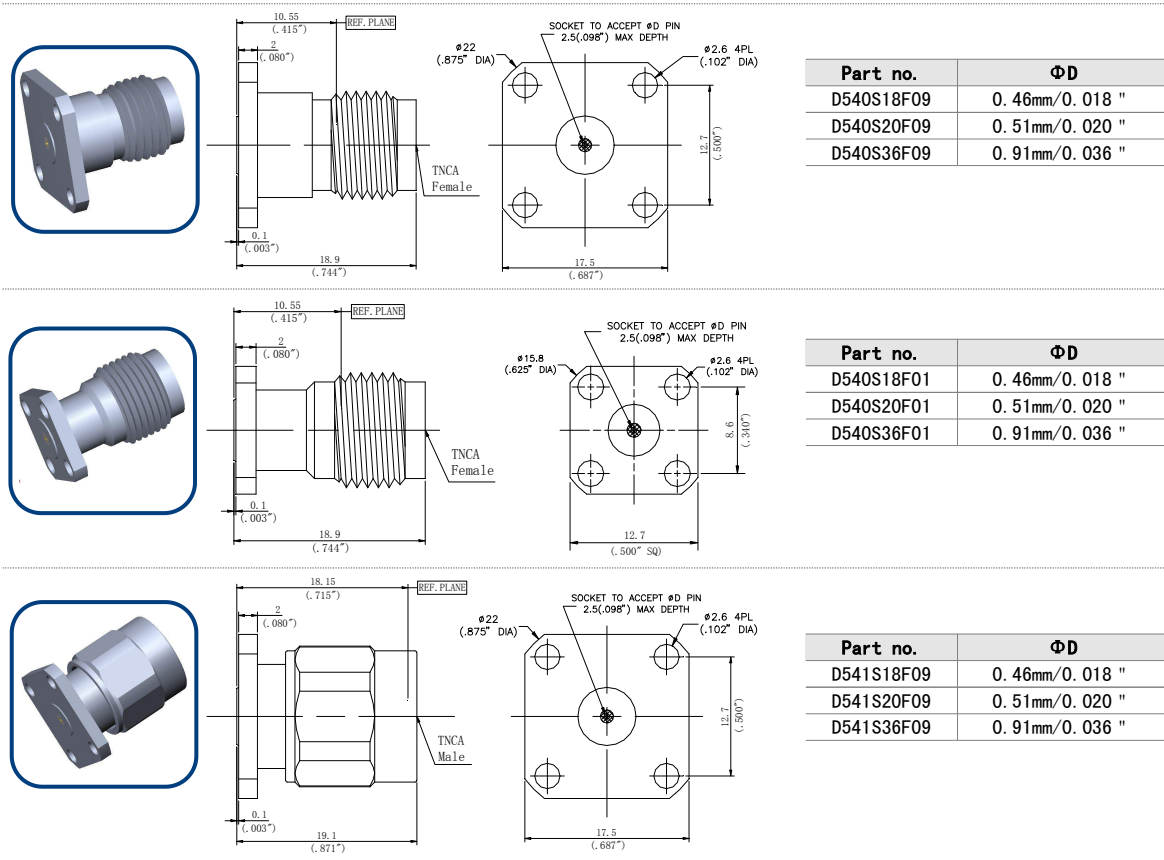

✧ TNCA Series Bulkhead Flange Connectors

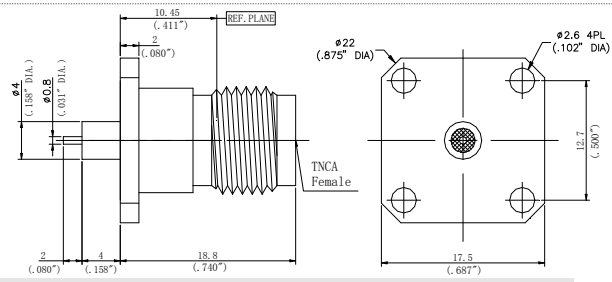



Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D540M0101F09	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.080 "

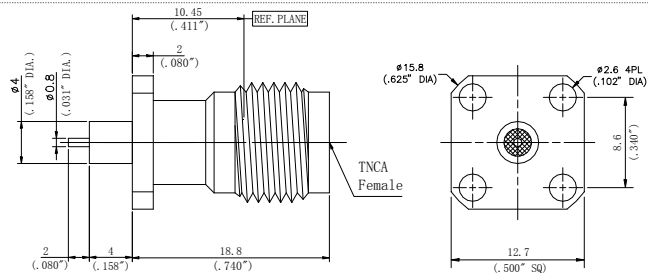



Part no.	$\Phi D1$	$\Phi D2$	L1	L2
D540M0101F01	4mm/0.158 "	0.8mm/0.031 "	4mm/0.158 "	2mm/0.080 "



✧ TNCA Series Straight Connector

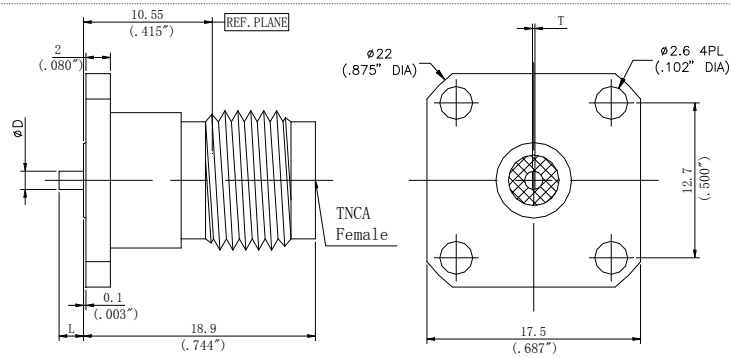

Part no.	ΦD	L	T
D540T15F09	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

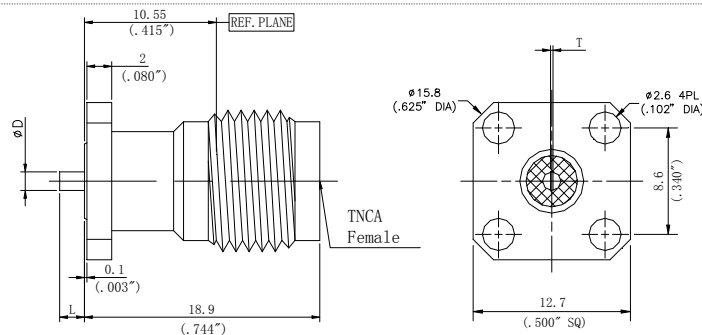

Part no.	ΦD	L	T
D540T15F01	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

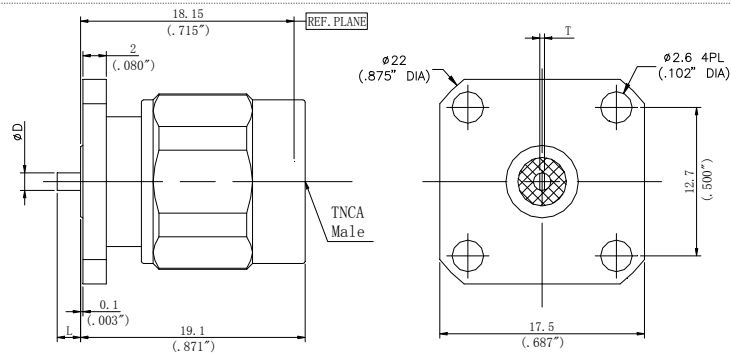

Part no.	ΦD	L	T
D541T15F09	1.50mm/0.059 "	2.00mm/0.079 "	0.2mm/0.008 "

SSMA Connector Series (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

VSWR:

DC~40GHz... 1.20:1 (Max)

Contact resistance: Centre Conductor ≤ 5.0mΩ
Outer Conductor ≤ 2.5mΩ

Insulation resistance: ≥ 1000MΩ

Withstanding Voltage: 750V

Durability: 500 Cycles

Operating Temperature: -55℃~+165℃



Materials/Finishes

Housing: Type 303 Stainless Steel
-Polished&Passivated

Center Contact: Beryllium Plated Gold

Insulators: PTFE&PEI

Interface Standards





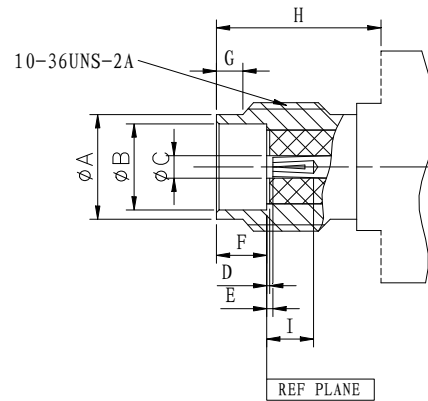
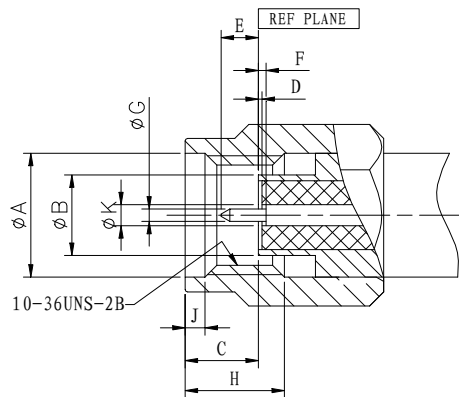


SSMA Male				
	mm		Inch	
	Min	Max	Min	Max
A	4.98	5.13	0.196	0.202
B	3.15	3.22	0.124	0.1268
C	2.54	3.38	0.100	0.133
D	0.00	0.25	0.000	0.010
E	1.27	1.65	0.050	0.065
F	0.00	0.25	0.000	0.010
G	0.50	0.53	0.0195	0.0208
H	3.30	—	0.130	—
J	0.38	1.14	0.015	0.045
K	0.85	0.88	0.0335	0.0348



Interface : Per MIL-STD-348A

SSMA Female				
	mm		Inch	
	Min	Max	Min	Max
A	3.89	4.06	0.153	0.160
B	3.23	3.30	0.127	0.130
C	0.851	0.884	0.0335	0.0348
D	0.00	0.25	0.000	0.010
E	0.00	0.25	0.000	0.010
F	1.90	1.96	0.075	0.077
G	0.51	1.02	0.020	0.040
H	5.84	—	0.230	—
I	1.91	—	0.075	—




✧ SSMA Series Field Replaceable Flange Connectors

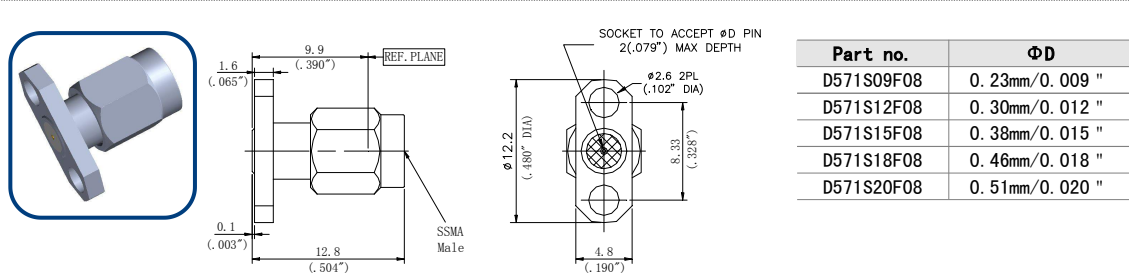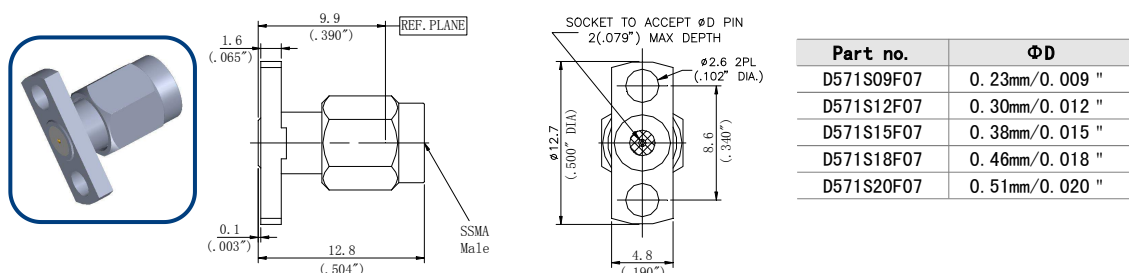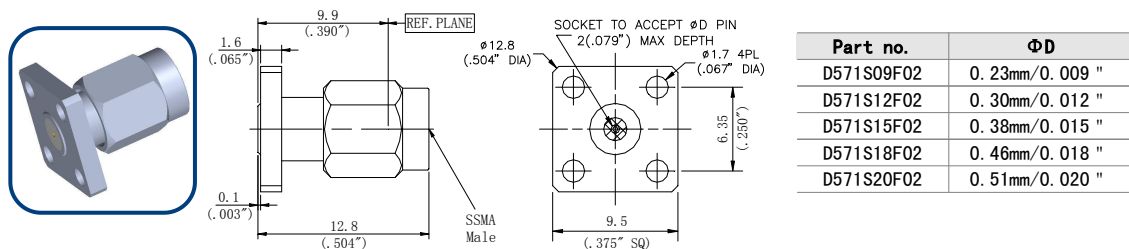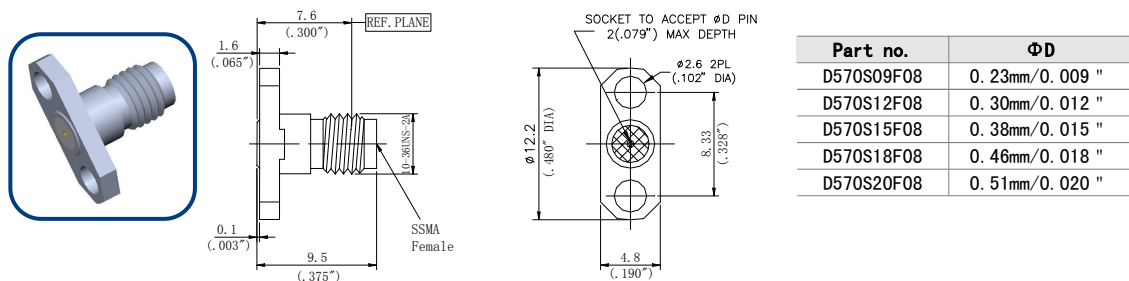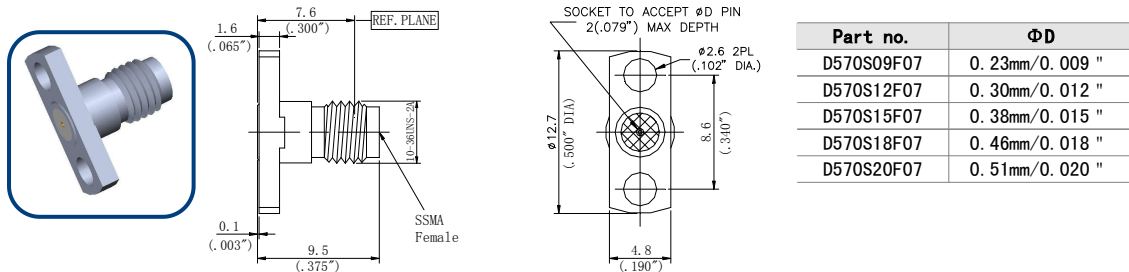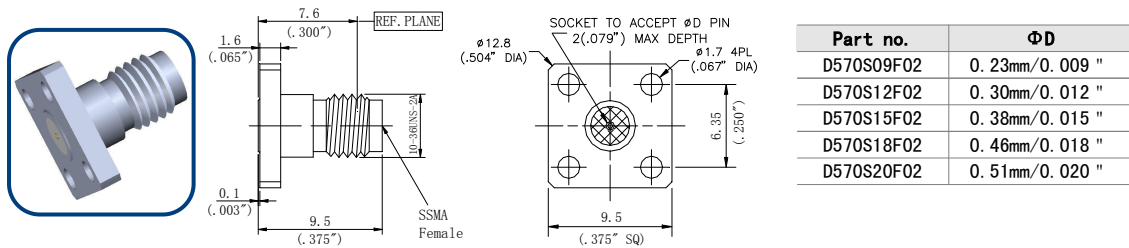


✧ SSMA Series Bulkhead Flange Connectors

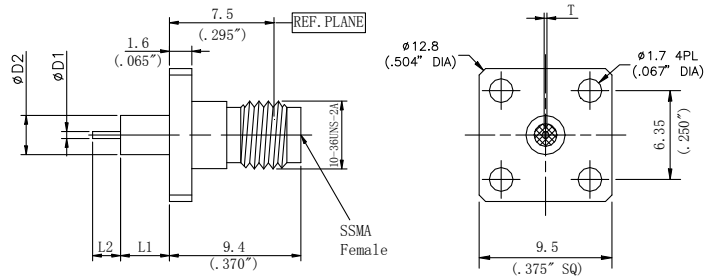

Part no.	ΦD1	ΦD2	L1	L2	T
D570M0616F02	0.6mm/0.024 "	2.8mm/0.110 "	3.1mm/0.122 "	2mm/0.08 "	0.20mm/0.008 "


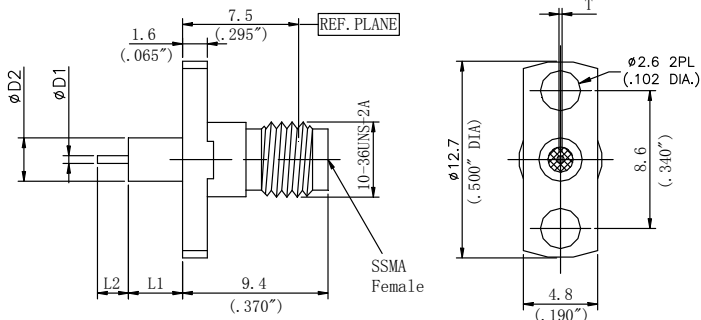



Drawing1




Drawing2

Part no.	ΦD1	ΦD2	L1	L2	T	Drawin g
D570M0616F07	0.6mm/0.024 "	2.8mm/0.110 "	3.1mm/0.122 "	2mm/0.08 "	0.20mm/0.008 "	Drawin g1
D570M0616F07C	0.6mm/0.024 "	2.8mm/0.110 "	3.1mm/0.122 "	2mm/0.08 "	0.20mm/0.008 "	Drawin g2

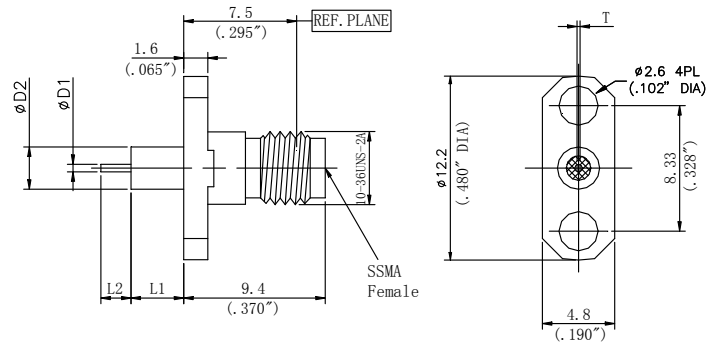

Drawing1



Drawing2



Part no.	D1	ΦD2	L1	L2	T	Drawin g
D570M0616F08	0.6mm/0.024 "	2.8mm/0.110 "	3.1mm/0.122 "	2mm/0.08 "	0.20mm/0.008 "	Drawin g1
D570M0616F08C	0.6mm/0.024 "	2.8mm/0.110 "	3.1mm/0.122 "	2mm/0.08 "	0.20mm/0.008 "	Drawin g2

Combined Connector

The Combined adapter including a replaceable connector and a pin.


There are various types of these parts, this solution can short the delivery and low the cost.

Structure types:

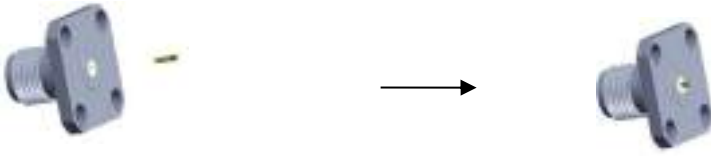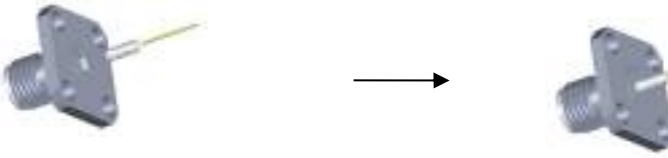	Replace Airline Bulkhead Connector
	Replace Connector Straight
	Replace Connectors Thread-in

☆ Pin Specification



1. Flat Pin

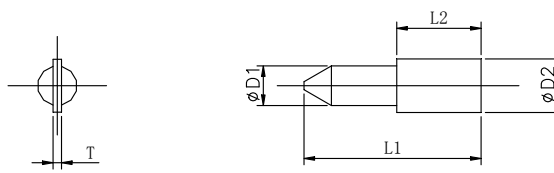

Part no.	ΦD1	ΦD2	L1	L2	T
L10S36	0.91mm/0.036"	1.27mm/0.05"	4.2mm/0.165"	2mm/0.079"	0.2mm/0.008"
L10S20	0.51mm/0.020"	0.6mm/0.024"	2.8mm/0.110"	1mm/0.04"	0.15mm/0.006"

Note: The part no. Designation of flat pin——D550S20F01 with L10S20, the final part no. Become :D550L10S20F01.



2. Round Pin



Part no.	L04S20	L03S20	L04S18	L03S18	L04S15	L03S15	L04S12	L03S12
L	7.5mm/0.295"	6.5mm/0.256"	7.5mm/0.295"	6.5mm/0.256"	7.5mm/0.295"	6.5mm/0.256"	7.5mm/0.295"	6.5mm/0.256"
ΦD	0.51mm/0.02"		0.46mm/0.018"		0.38mm/0.015"		0.30mm/0.012"	

Note: The standard hole depth of SMA\2.92mm\2.4mm\SSMA replaceable Adapter is 2mm, N\TNCA replaceable Adapter is 2.5mm.



3. Ladder Round Pin

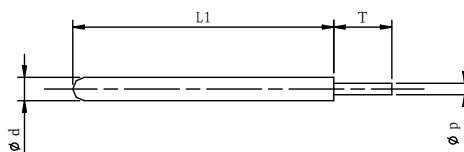

Part no.	L05S20A	L06S20A
Φd	0.51mm/0.02"	
L1	4.1mm/0.160"	5.7mm/0.225"
T	1.27mm/0.05"	
Φp	0.254mm/0.01"	

Note: The standard hole depth of SMA\2.92mm\2.4mm\SSMA replaceable Adapter is 2mm, N\TNCA replaceable Adapter is 2.5mm.

4. (PTFE)




Part no.	J03S20	J04S20	J05S20	J06S20
ΦD	1.67mm/0.066"			
L2	3mm/0.118"	4mm/0.158"	3.18mm/0.125"	4.75mm/0.187"
Φd	0.51mm/0.02"			

RF Coaxial Adapters





ST Part number Designation of Adapter

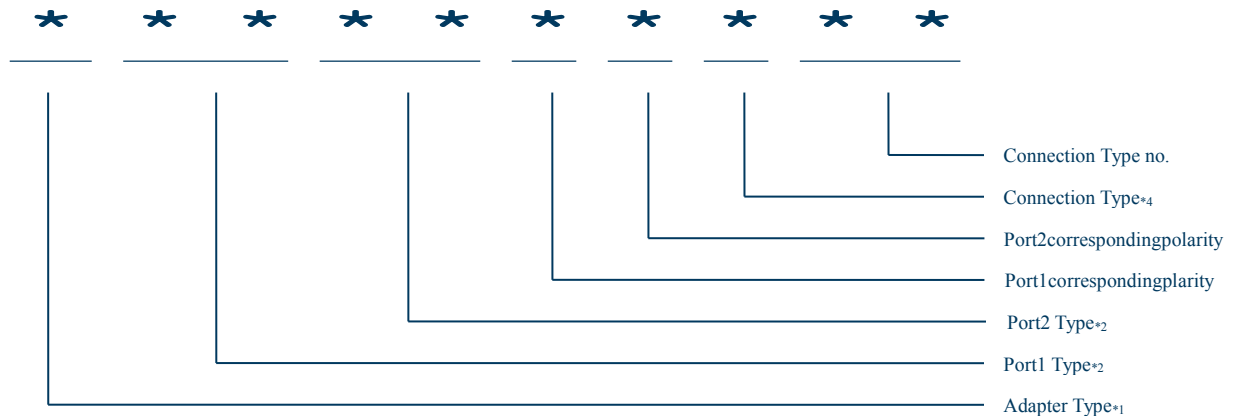

*1、Adapter Type

Z	Standard Adapter
K	Quick Replacement Adapter

*2、Port Type

32	7/16
33	APC-7
34	N type
35	3.5mm
36	2.92mm
37	2.4mm
38	1.85mm
52	BNC
53/54	TNC/TNCA
55	SMA
57	SSMA
58	BMA
62	L16
63	SMP

*3、Port Polarity

0	K/Jack/Female
1	J/Plug/Male
N	None
3	Reversed polarity (hole) K/Jack/Female
4	Reversed polarity (pin) /J/Plug/Male

*4、Adapter Type

Z	Straight Type
F	Flange Type
Y	Thread-in Type
S	Waterproof Type
W	Right angle Type



IN-series Adapter

✧ TNC-TNC Adapter (DC~11GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~11GHz

Durability: 500 Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE

Interface TNC Per MIL-STD-348A

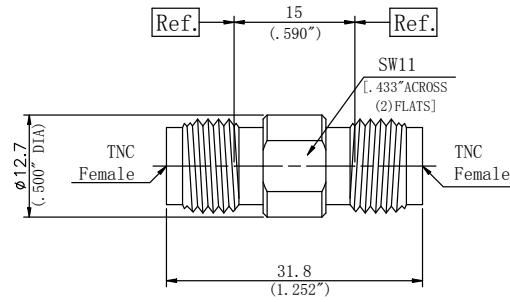


Descript TNC (f) to TNC (f)

ion

art no. Z535300Z01

VSWR DC-11GHz1.15:1 (max)

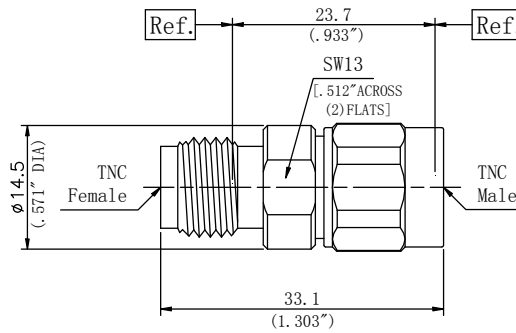


Descript TNC (m) to TNC (f)

ion

art no. Z535310Z01

VSWR DC-11GHz1.15:1 (max)

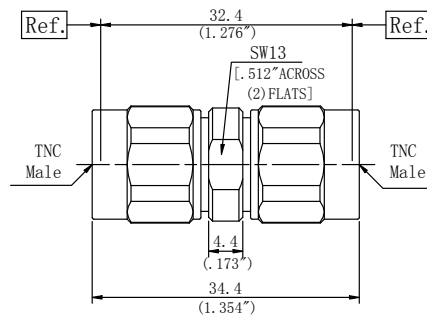

Descript TNC (m) to TNC (m)

ion

art no. Z535311Z01

VSWR DC-11GHz1.15:1 (max)



✧ TNCA-TNCA Adapter (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface TNCA Per MIL-STD-348A

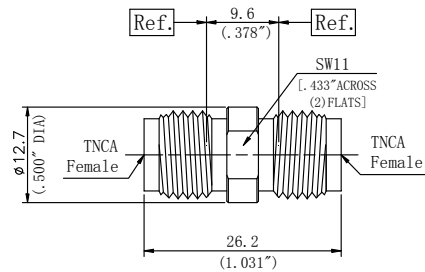

Description TNCA (f) to TNCA (f)

Part no. Z545400Z01


VSWR DC-18GHz····1.25:1 (max)

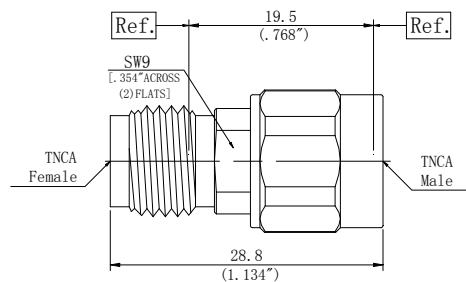

Description TNCA (m) to TNCA (f)

Part no. Z545410Z01


VSWR DC-18GHz ·····1.25:1 (max)

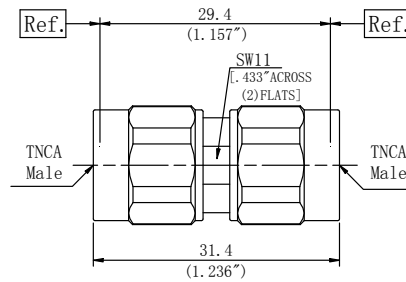

Description TNCA (m) to TNCA (m)

Part no. Z545411Z01


VSWR DC-18GHz ·····1.25:1 (max)

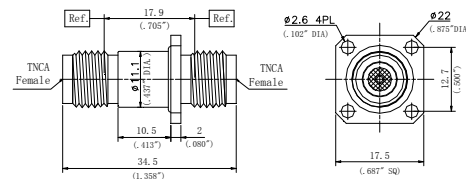

Description TNCA (f) to TNCA (f)

Part no. Z545400FS09

VSWR DC-18GHz ·····1.25:1 (max)

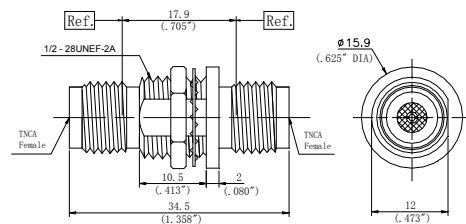

Description TNCA (f) to TNCA (f)

Part no. Z545400Y01

VSWR DC-18GHz····1.25:1 (max)

✧ BNC-BNC Adapter (DC~8GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~8GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface BNC Per MIL-STD-348A

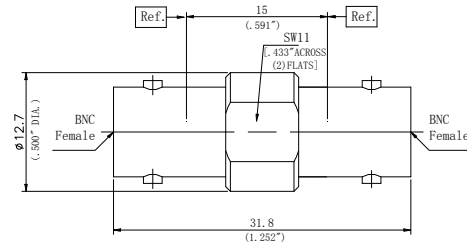

Description BNC (f) to BNC (f)

Part no. Z525200Z01


VSWR DC-8GHz1.15:1 (max)

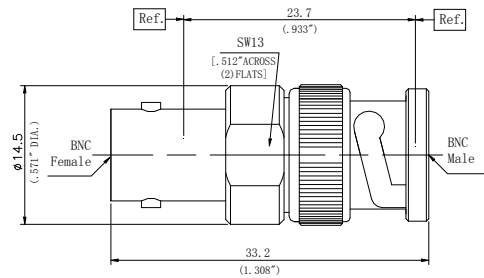

Description BNC (m) to BNC (f)

Part no. Z525210Z01

VSWR DC-8GHz1.15:1 (max)

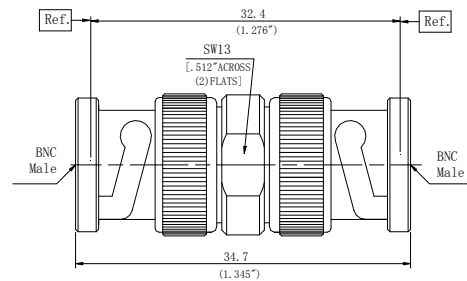

Description BNC (m) to BNC (m)

Part no. Z525211Z01

VSWR DC-8GHz1.15:1 (max)



✧ N-N Adapter (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per

MIL-G-45204)

Insulators: PEI


Interface N Type Per MIL-STD-348A

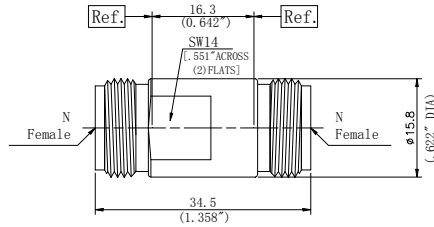

Description N (f) to N (f)

Part no. Z343400Z01


VSWR DC-18GHz····1.15:1 (max)

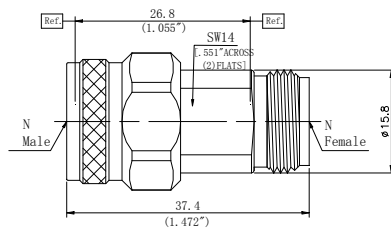

Description N (m) to N (f)

Part no. Z343410Z01


VSWR DC-18GHz····1.15:1 (max)

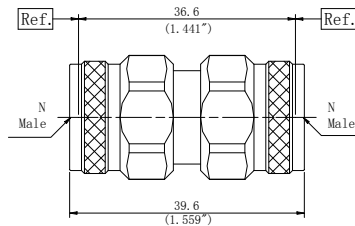

Description N (m) to N (m)

Part no. Z343411Z01


VSWR DC-18GHz ·····1.15:1 (max)

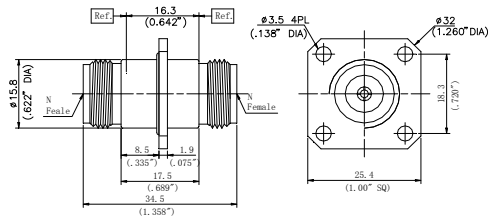

Description N (f) to N (f)

Part no. Z343400FS10


VSWR DC-18GHz····1.15:1 (max)

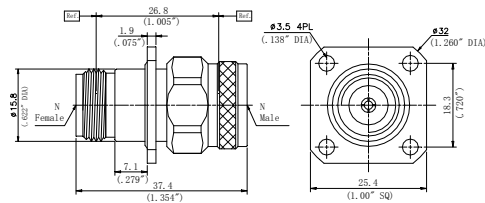

Description N (m) to N (f)

Part no. Z343410FS10


VSWR DC-18GHz ·····1.15:1 (max)

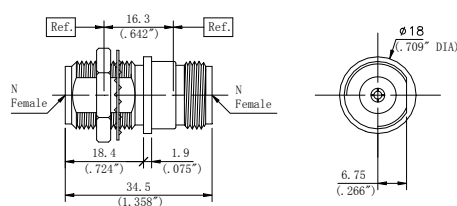


Description N (f) to N (f)

Part no. Z343400Y01


VSWR DC-18GHz····1.15:1 (max)

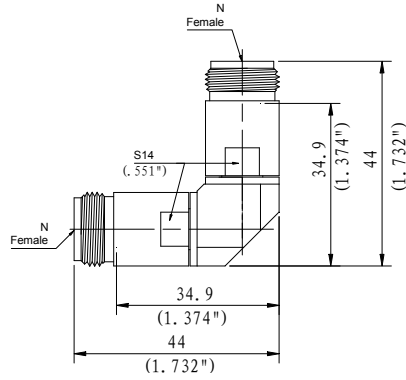

Description N (f) to N (f)
Right Angle
Part no. Z343400W01
VSWR DC-18GHz····1.25:1 (max)

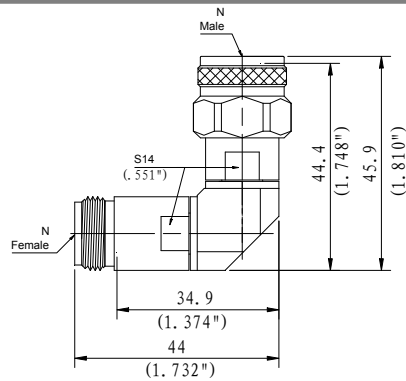

Description N (m) to N (f)
Right Angle
Part no. Z343410W01
VSWR DC-18GHz····1.25:1 (max)

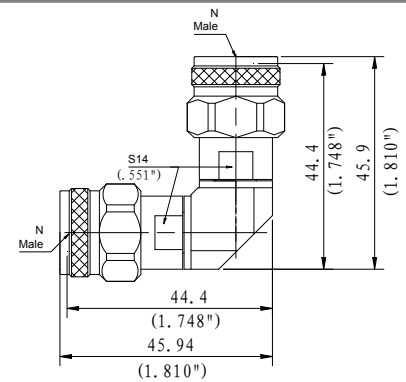

Description N (m) to N (m)
Right Angle
Part no. Z343411W01
VSWR DC-18GHz····1.25:1 (max)



✧ SMA-SMA Adapter (DC~27GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~27GHz

Durability: 5000Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface SMA Per MIL-STD-348A

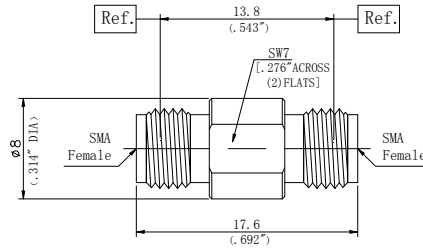

Description SMA (f) to SMA (f)

Part no. Z555500Z01


VSWR DC-27GHz ... 1.15:1 (max)

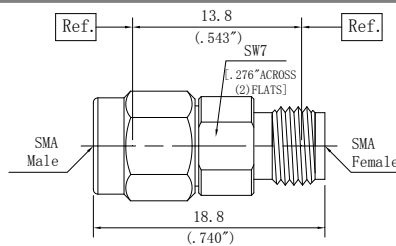

Description SMA (m) to SMA (f)

Part no. Z555510Z01


VSWR DC-27GHz ... 1.15:1 (max)

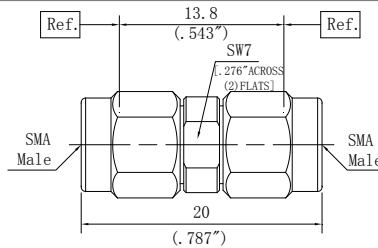

Description SMA (m) to SMA (m)

Part no. Z555511Z01


VSWR DC-27GHz ... 1.15:1 (max)

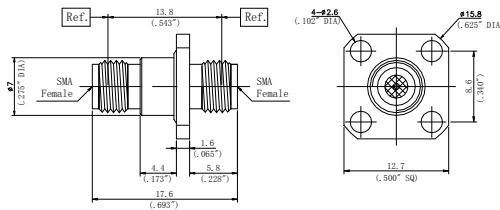

Description SMA (f) to SMA (f)

Part no. Z555500FS01


VSWR DC-27GHz ... 1.15:1 (max)

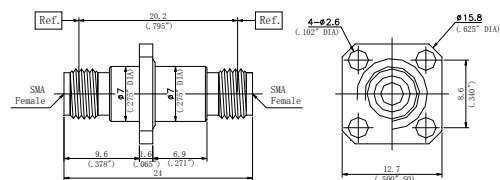

Description SMA (f) to SMA (f)

Part no. Z555500FS01A


VSWR DC-27GHz ... 1.15:1 (max)

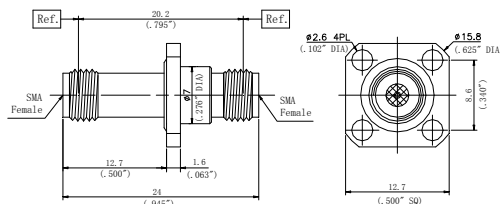

Description SMA (f) to SMA (f)

Part no. Z555500FS01B


VSWR DC-27GHz ... 1.15:1 (max)

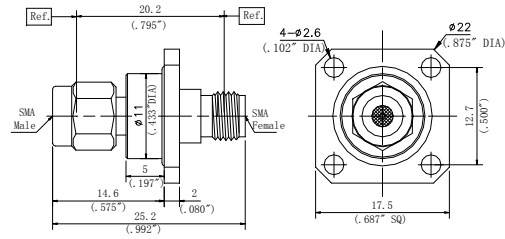

Description SMA (m) to SMA (f)

Part no. Z555510FS09A


VSWR DC-27GHz...1.15:1 (max)

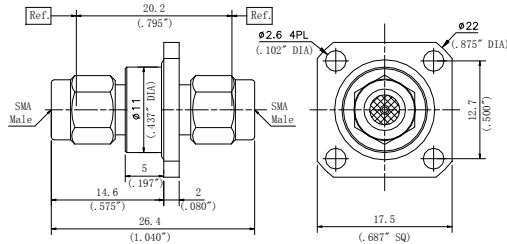

Description SMA (m) to SMA (m)

Part no. Z555511FS09A


VSWR DC-27GHz...1.15:1 (max)

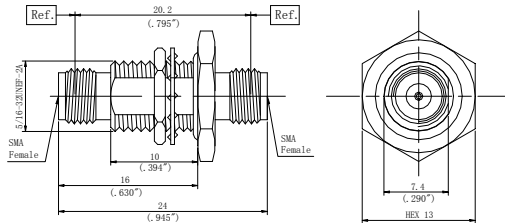

Description SMA (f) to SMA (f)

Part no. Z555500YS02


VSWR DC-27GHz...1.15:1 (max)

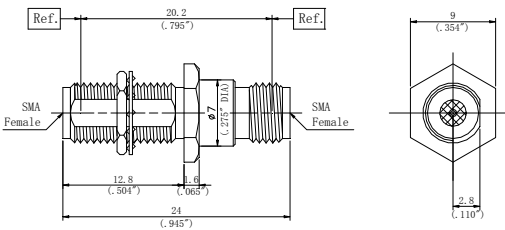

Description SMA (f) to SMA (f)

Part no. Z555500Y03


VSWR DC-27GHz...1.15:1 (max)

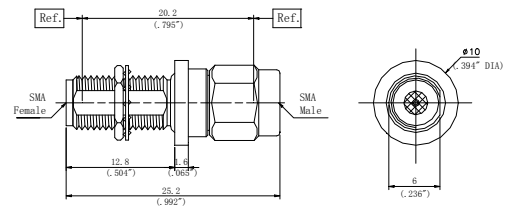

Description SMA (m) to SMA (f)

Part no. Z555510YS01


VSWR DC-27GHz...1.15:1 (max)

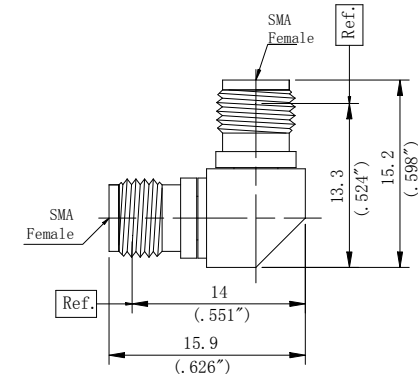


Description SMA (f) to SMA (f) Right Angle

Part no. Z555500W01

VSWR DC-27GHz...1.25:1 (max)

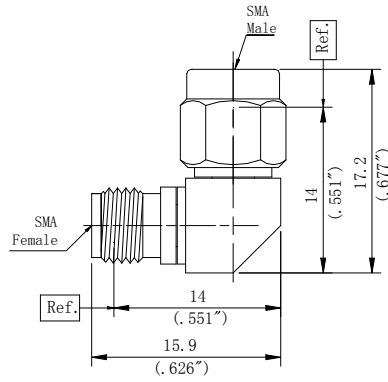

Description SMA (m) to SMA (f)
Right Angle
Part no. Z555510W01
VSWR DC-27GHz1.25:1 (max)

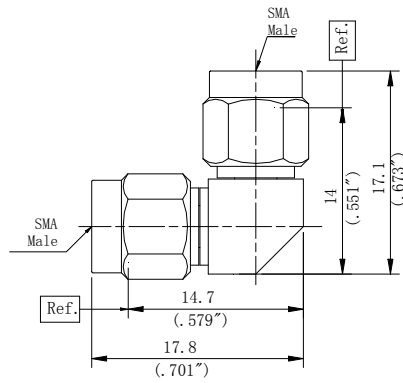

Description SMA (m) to SMA (m)
Right Angle
Part no. Z555511W01
VSWR DC-27GHz1.25:1 (max)



✧ SSMA-SSMA Adapter (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface SSMA Per MIL-STD-348A

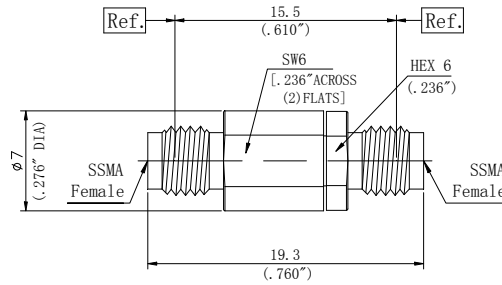

Description SSMA (f) to SSMA (f)

Part no. Z575700Z01


VSWR DC-40GHz1.20:1 (max)

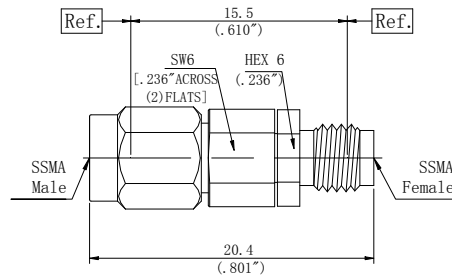

Description SSMA (m) to SSMA (f)

Part no. Z575710Z01

VSWR DC-40GHz1.20:1 (max)

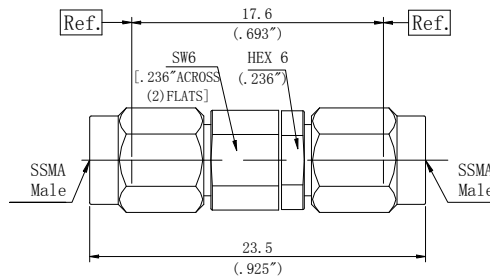

Description SSMA (m) to SSMA (m)

Part no. Z575711Z01

VSWR DC-40GHz1.20:1 (max)



✧ 3.5mm-3.5mm Adapter (DC~33GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~33GHz

Durability: 5000Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI


Interface 3.5mm Per IEC-60169

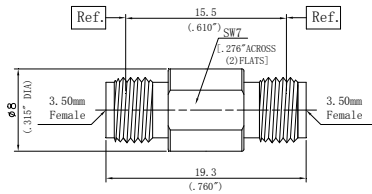


Description 3.5mm (f) to 3.5mm (f)
Part no. Z353500Z01
VSWR DC-33GHz····1.15:1 (max)

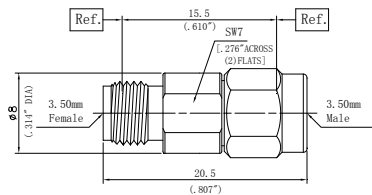


Description 3.5mm (m) to 3.5mm (f)
Part no. Z353510Z01
VSWR DC-33GHz····1.15:1 (max)

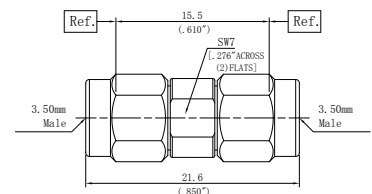


Description 3.5mm (m) to 3.5mm (m)
Part no. Z353511Z01
VSWR DC-33GHz····1.15:1 (max)

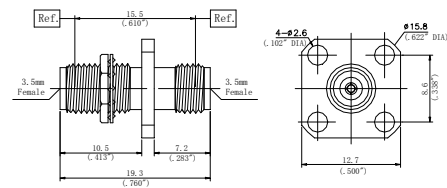


Description 3.5mm (f) to 3.5mm (f)
Part no. Z353500FY01
VSWR DC-33GHz····1.15:1 (max)

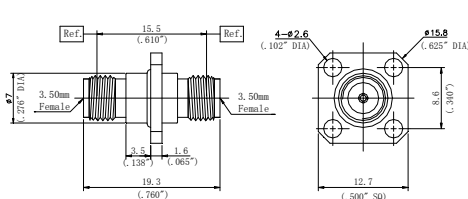


Description 3.5mm (f) to 3.5mm (f)
Part no. Z353500FS01
VSWR DC-33GHz····1.15:1 (max)

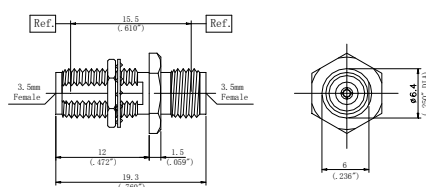

Description 3.5mm (f) to 3.5mm (f)
Part no. Z353500Y02
VSWR DC-33GHz····1.15:1 (max)

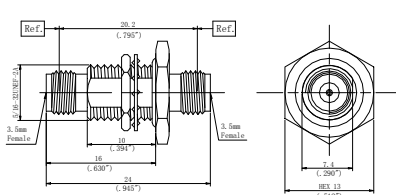


Description 3.5mm (f) to 3.5mm (f)
Part no. Z353500YS02
VSWR DC-33GHz····1.15:1 (max)

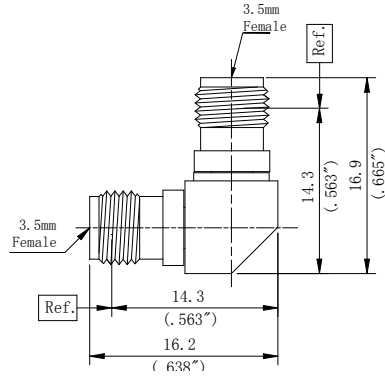

Description 3.5mm (f) to 3.5mm (f)
Right Angle

Part no. Z353500W01


VSWR DC-27GHz····1.25:1 (max)

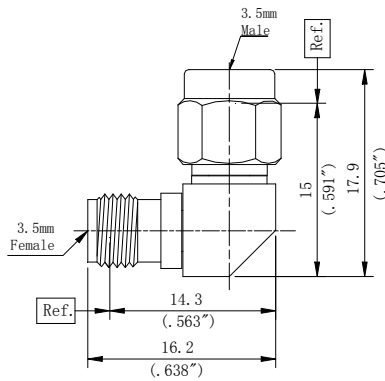

Description 3.5mm (m) to 3.5mm (f)
Right Angle

Part no. Z353510W01

VSWR DC-27GHz····1.25:1 (max)

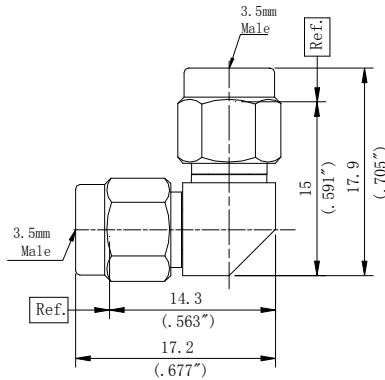

Description 3.5mm (m) to 3.5mm (m)
Right Angle

Part no. Z353511W01

VSWR DC-27GHz····1.25:1 (max)



✧ 2.92mm-2.92mm Adapter (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

Durability: 5000cycles


Operating Temperature: -55°C~+165°C

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI


Interface 2.92mm Per MIL-STD-348A

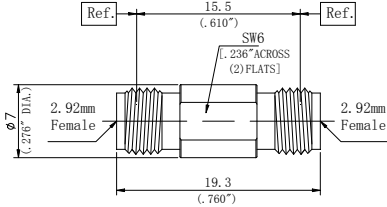

Description 2.92mm (f) to 2.92mm (f)

Part no. Z363600Z01


VSWR DC-40GHz1.20:1 (max)

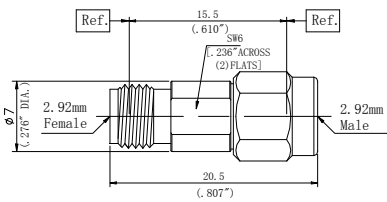

Description 2.92mm (m) to 2.92mm (f)

Part no. Z363610Z01


VSWR DC-40GHz1.15:1 (max)

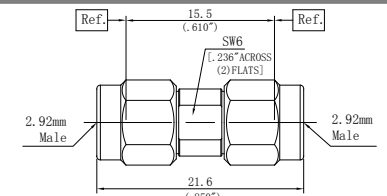

Description 2.92mm (m) to 2.92mm (m)

Part no. Z363611Z01


VSWR DC-40GHz1.15:1 (max)

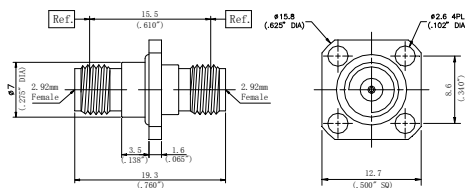

Description 2.92mm (f) to 2.92mm (f)

Part no. Z363600FS01


VSWR DC-40GHz1.20:1 (max)

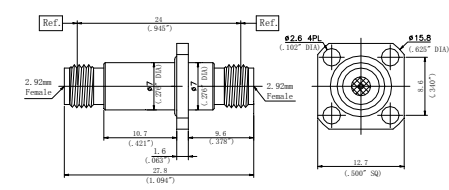

Description 2.92mm (f) to 2.92mm (f)

Part no. Z363600FS01A


VSWR DC-40GHz1.20:1 (max)

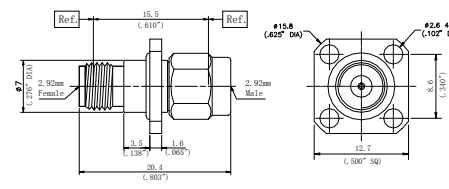

Description 2.92mm (m) to 2.92mm (f)

Part no. Z363610FS01


VSWR DC-40GHz1.15:1 (max)

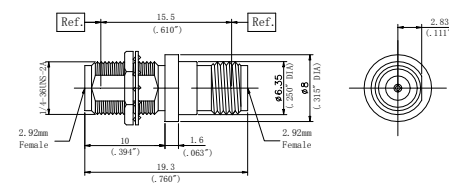

Description 2.92mm (f) to 2.92mm (f)

Part no. Z363600Y01


VSWR DC-40GHz1.20:1 (max)

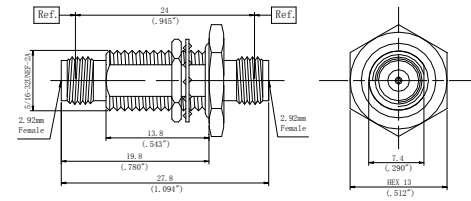

Description 2.92mm (f) to 2.92mm (f)

Part no. Z363600YS02


VSWR DC-40GHz····1.20:1 (max)

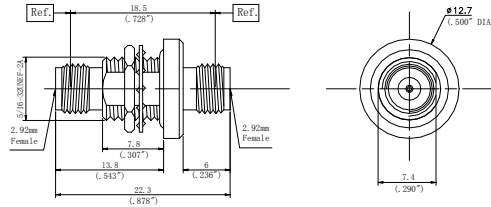

Description 2.92mm (f) to 2.92mm (f)

Part no. Z363600YS02A


VSWR DC-40GHz····1.20:1 (max)

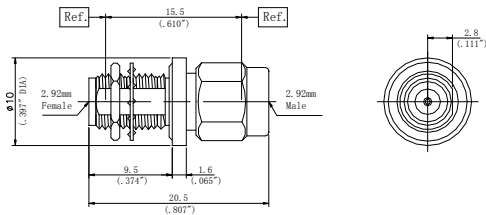

Description 2.92mm (m) to 2.92mm (f)

Part no. Z363610YS01


VSWR DC-40GHz····1.15:1 (max)

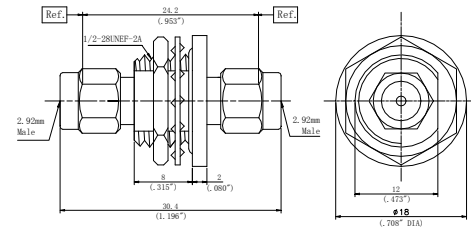

Description 2.92mm (m) to 2.92mm (m)

Part no. Z363611YS01


VSWR DC-40GHz····1.20:1 (max)

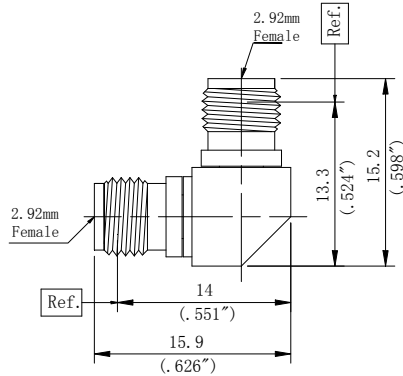

Description 2.92mm (f) to 2.92mm (f)
Right Angle

Part no. Z363600W01


VSWR DC-40GHz····1.25:1 (max)

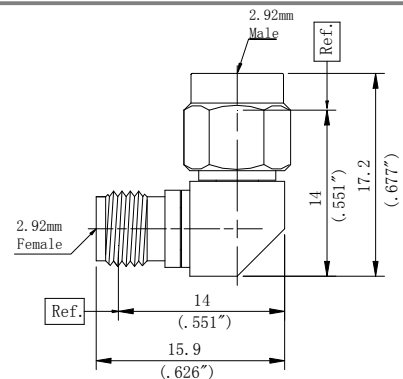

Description 2.92mm (m) to 2.92mm (f)
Right Angle

Part no. Z363610W01

VSWR DC-40GHz····1.25:1 (max)

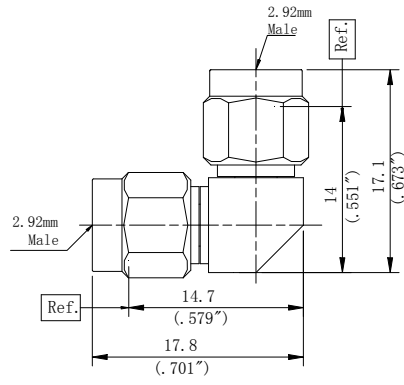

Description	2.92mm (m) to 2.92mm (m) Right Angle
Part no.	Z363611W01
VSWR	DC-40GHz.....1.25:1 (max)



✧ 2.4mm-2.4mm Adapter (DC~50GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~50GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI

Interface


2.4mm Per IEC 61169

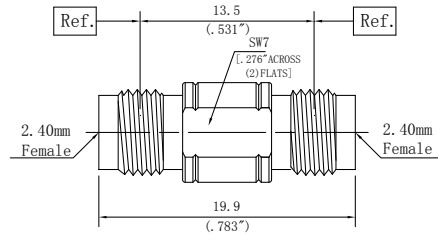

Description 2.4mm (f) to 2.4mm (f)

Part no. Z373700Z01


VSWR DC-50GHz····1.20:1 (max)

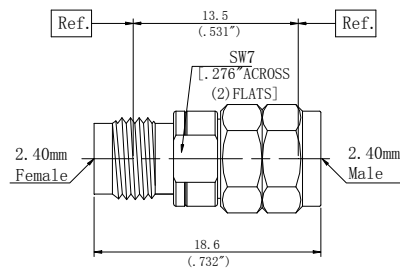

Description 2.4mm (m) to 2.4mm (f)

Part no. Z373710Z01


VSWR DC-50GHz····1.15:1 (max)

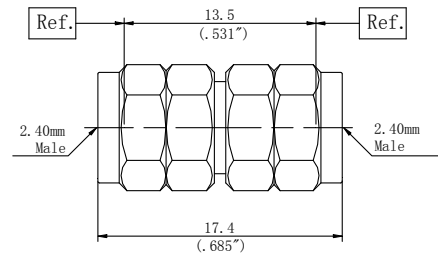

Description 2.4mm (m) to 2.4mm (m)

Part no. Z373711Z01


VSWR DC-50GHz····1.15:1 (max)

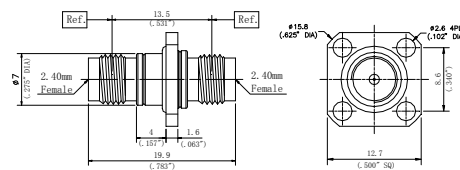

Description 2.4mm (f) to 2.4mm (f)

Part no. Z373700FS01

VSWR DC-50GHz····1.20:1 (max)

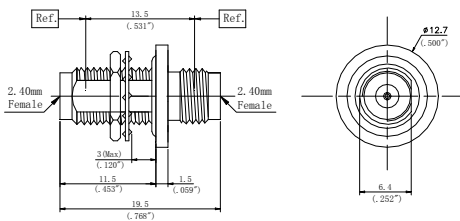

Description 2.4mm (f) to 2.4mm (f)

Part no. Z373700YS02C

VSWR DC-50GHz····1.20:1 (max)



✧ 1.85mm-1.85mm Adapter (DC~65GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~65GHz

Durability: 500Cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI


Interface 1.85mm Per IEC 61169

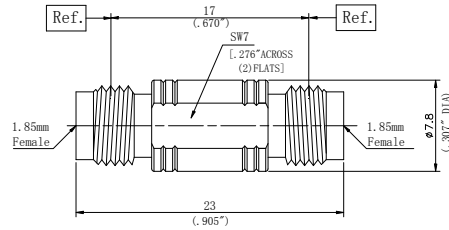

Description 1.85mm (f) to 1.85mm (f)

Part no. Z383800Z01


VSWR DC-65GHz····1.25:1 (max)

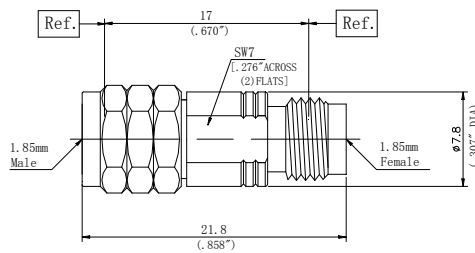

Description 1.85mm (m) to 1.85mm (f)

Part no. Z383810Z01


VSWR DC-65GHz····1.25:1 (max)

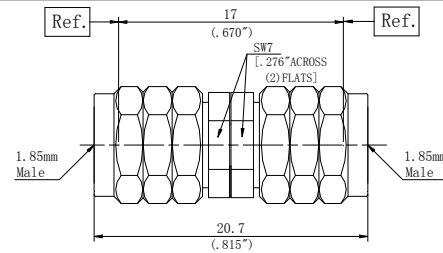

Description 1.85mm (m) to 1.85mm (m)

Part no. Z383811Z01


VSWR DC-65GHz····1.25:1 (max)

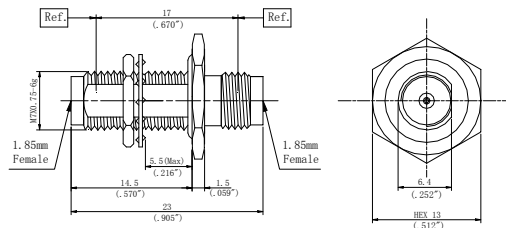

Description 1.85mm (f) to 1.85mm (f)

Part no. Z383800YS02

VSWR DC-65GHz····1.25:1 (max)

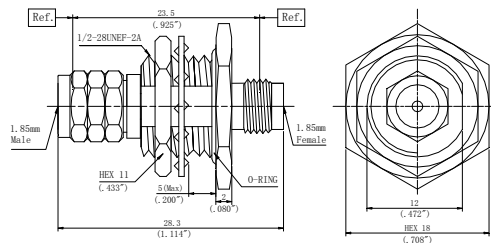

Description 1.85mm (m) to 1.85mm (f)

Part no. Z383810YS01

VSWR DC-65GHz····1.25:1 (max)



✧ 7/16-7/16 Adapter (DC~8GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~8GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Brass

Plated Ternary alloy

Center Contact: Beryllium Copper Plated Silver

Insulators: PEI


Interface 7/16PerIEC 60169

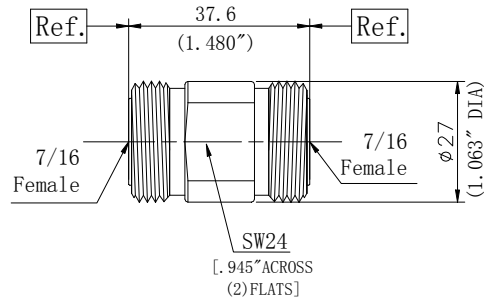

Description 7/16 (f) to 7/16 (f)

Part no. Z323200Z01


VSWR DC-8GHz.....1.15:1 (max)

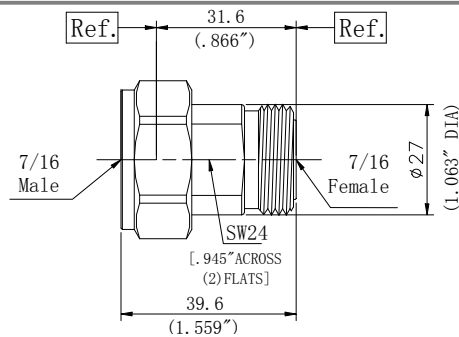

Description 7/16 (m) to 7/16 (f)

Part no. Z323210Z01

VSWR DC-8GHz.....1.15:1 (max)

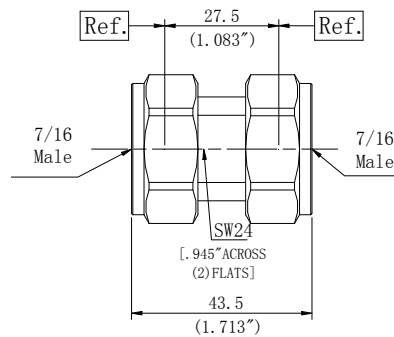

Description 7/16 (m) to 7/16 (m)

Part no. Z323211Z01

VSWR DC-8GHz.....1.15:1 (max)



Between Series Adapter

✧ APC-7 Between Series Adapters(DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing:Type 303 Stainless Steel -Polished&Passivated


Center Contact:Beryllium Copper Plated Gold(Per MIL-G-45204)

Insulators:PEI


Interface N Type Per MIL-STD-348A

APC-7Interface Per IEC-60457


3.5mmInterface Per IEC-60169

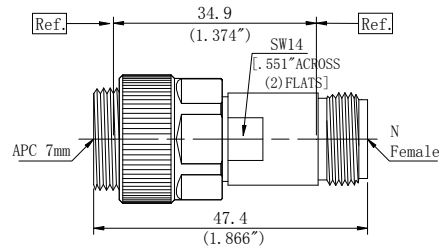
Description APC-7 to N (f)


Part no. Z3334N0Z01

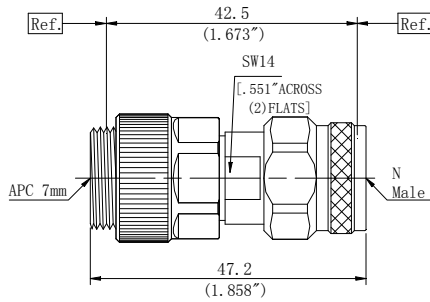VSWR DC-18GHz····1.10:1 (max)

Description APC-7 to N (m)

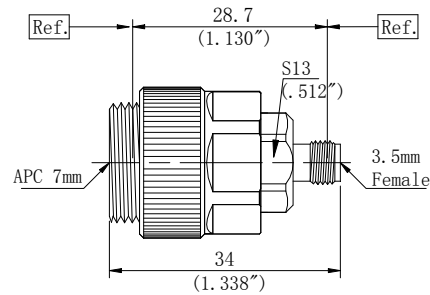Part no. Z3334N1Z01

VSWR DC-18GHz····1.10:1 (max)

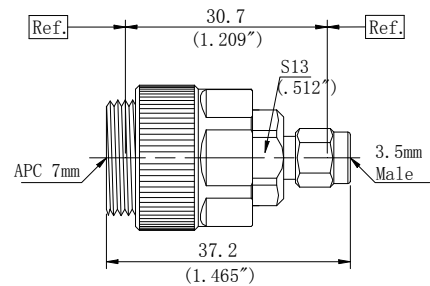Description APC-7 to 3.5mm (f)

Part no. Z3335N0Z01

VSWR DC-18GHz····1.10:1 (max)

Description APC-7 to 3.5mm (m)

Part no. Z3335N1Z01

VSWR DC-18GHz····1.10:1 (max)

✧ L16-N Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated钝化


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI


Interface

L16 Type Per GJB681A


N Type Per MIL-STD-348A

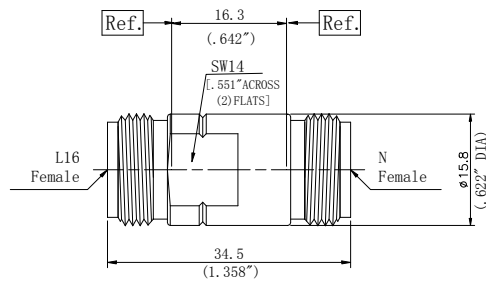
Description L16 (f) to N (f)


Part no. Z313400Z01

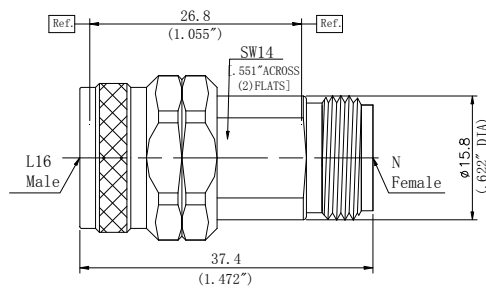VSWR DC-18GHz.....1.15:1 (max)

Description L16 (m) to N (f)

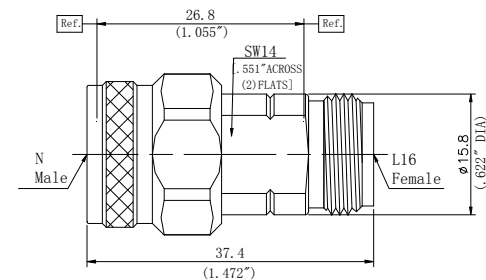Part no. Z313410Z01

VSWR DC-18GHz.....1.15:1 (max)

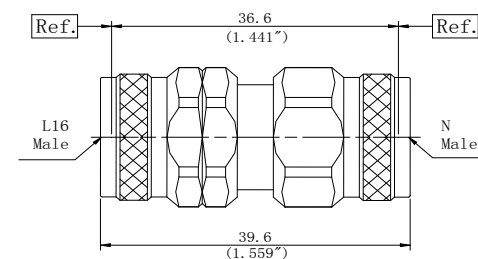Description L16 (f) to N (m)

Part no. Z313401Z01

VSWR DC-18GHz.....1.15:1 (max)

Description L16 (m) to N (m)

Part no. Z313411Z01

VSWR DC-18GHz.....1.15:1 (max)

✧ L16-SMA Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE

Interface

L16 Type Per GJB681A


SMA Per MIL-STD-348A

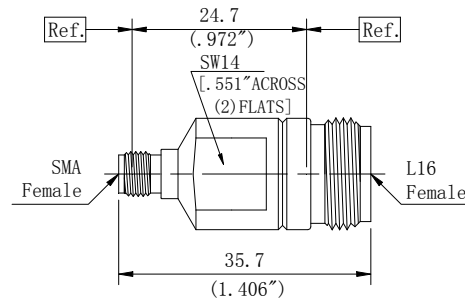

Description L16 (f) to SMA (f)

Part no. Z315500Z01


VSWR DC-18GHz.....1.15:1 (max)

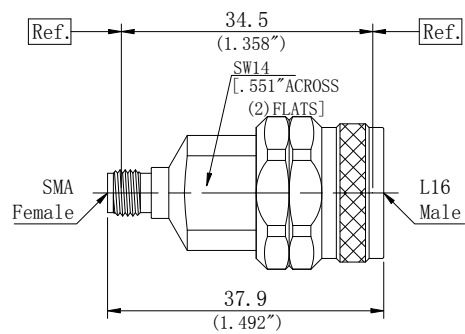

Description L16 (m) to SMA (f)

Part no. Z315510Z01


VSWR DC-18GHz.....1.15:1 (max)

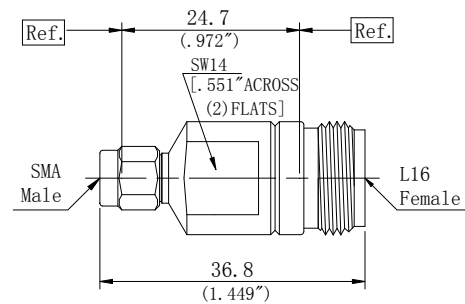

Description L16 (f) to SMA (m)

Part no. Z315501Z01

VSWR DC-18GHz.....1.15:1 (max)

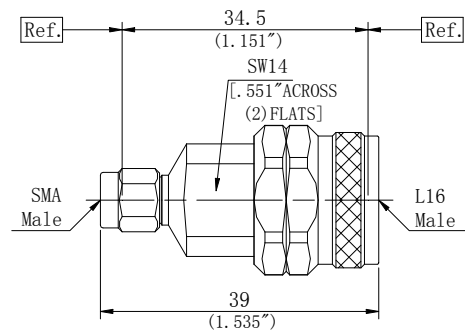

Description L16 (m) to SMA (m)

Part no. Z315511Z01

VSWR DC-18GHz.....1.15:1 (max)

✧ N-3.5mm Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI


Interface

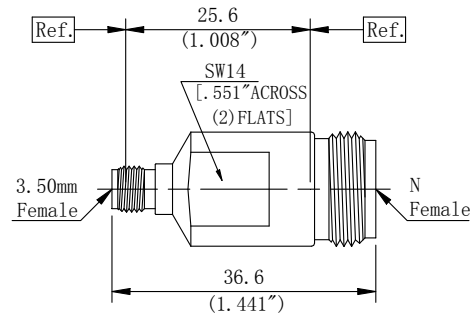N Type Per MIL-STD-348A
3.5mm Per IEC-60169

Description N (f) to 3.5mm (f)

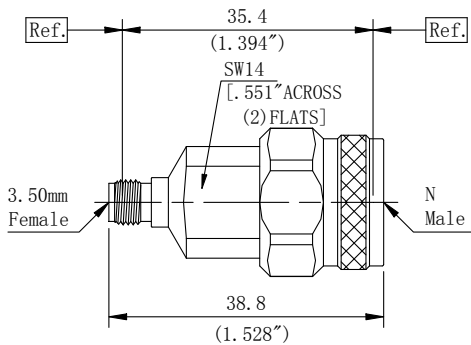
Part no. Z343500Z01

VSWR DC-18GHz····1.15:1 (max)

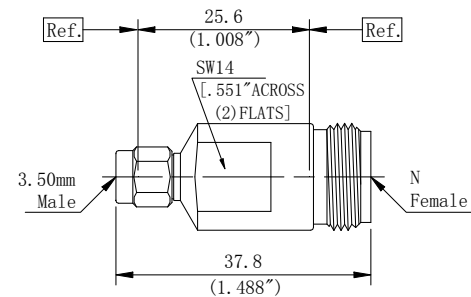Description N (m) to 3.5mm (f)

Part no. Z343510Z01

VSWR DC-18GHz····1.15:1 (max)

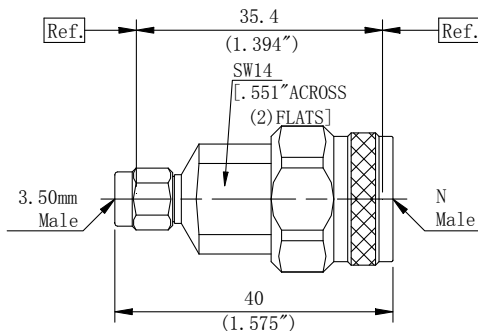Description N (f) to 3.5mm (m)

Part no. Z343501Z01

VSWR DC-18GHz····1.15:1 (max)

Description N (m) to 3.5mm (m)

Part no. Z343511Z01

VSWR DC-18GHz····1.15:1 (max)

✧ N-2.92mm Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

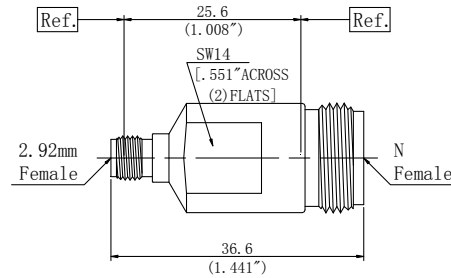Interface N Type/2.92mm Per MIL-STD-348A

Description N (f) to 2.92mm (f)

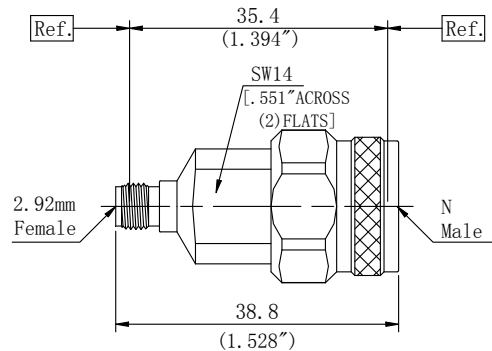
Part no. Z343600Z01

VSWR DC-18GHz.....1.15:1 (max)

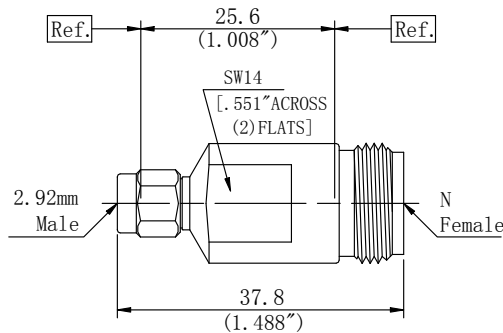Description N (m) to 2.92mm (f)

Part no. Z343610Z01

VSWR DC-18GHz.....1.15:1 (max)

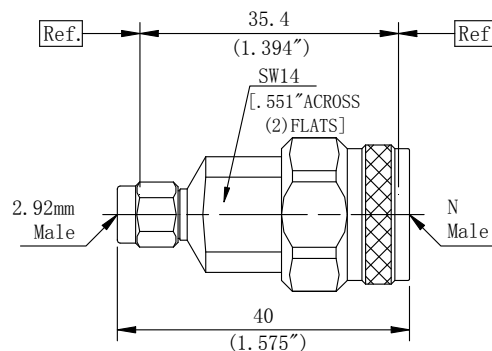Description N (f) to 2.92mm (m)

Part no. Z343601Z01

VSWR DC-18GHz.....1.15:1 (max)

Description N (m) to 2.92mm (m)

Part no. Z343611Z01

VSWR DC-18GHz.....1.15:1 (max)

✧ N-2.4mm Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles


Operating Temperature: -55°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

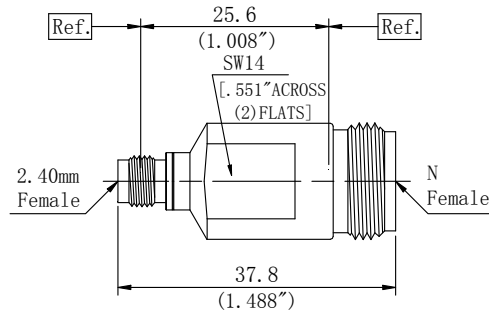Interface N Type Per MIL-STD-348A 2.4mm Per IEC 61169

Description N (f)to 2.4mm (f)

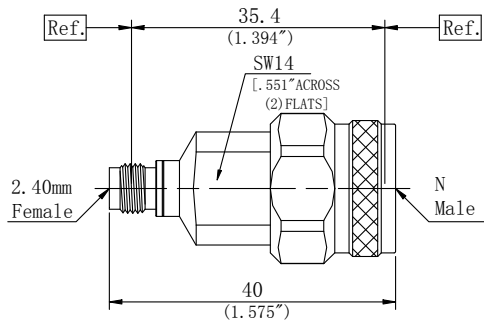
Part no. Z343700Z01

VSWR DC-18GHz····1.15:1 (max)

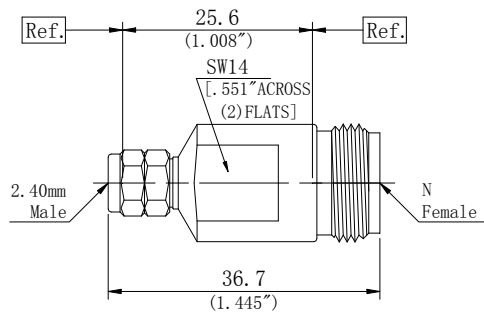Description N (m)to 2.4mm (f)

Part no. Z343710Z01

VSWR DC-18GHz····1.15:1 (max)

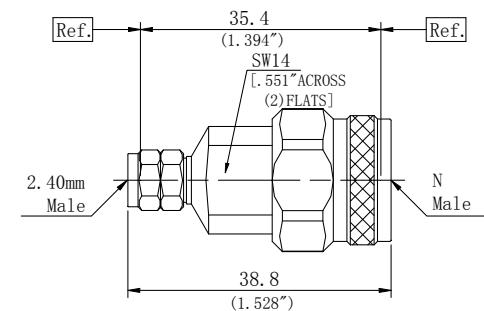Description N (f)to 2.4mm (m)

Part no. Z343701Z01

VSWR DC-18GHz····1.15:1 (max)

Description N (m)to 2.4mm (m)

Part no. Z343711Z01

VSWR DC-18GHz····1.15:1 (max)

✧ N-BNC Between Series Adapters(DC~8GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~8GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing:Type 303 Stainless Steel -Polished&Passivated


Center Contact:Beryllium Copper Plated Gold(Per MIL-G-45204)

Insulators:PEI&PTFE


Interface N Type/BNC Per MIL-STD-348A

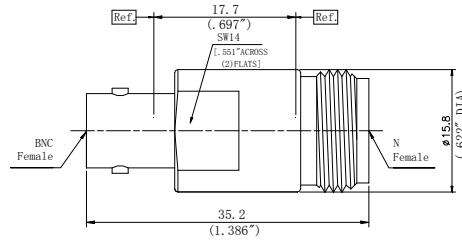
Description N (f) to BNC (f)


Part no. Z345200Z01

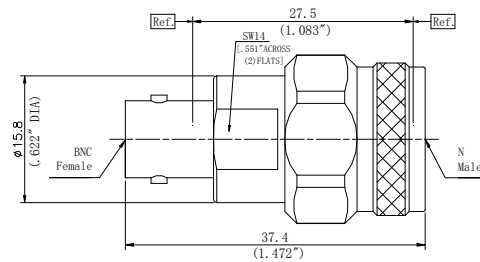VSWR DC-8GHz····1.15:1 (max)

Description N (m) to BNC (f)

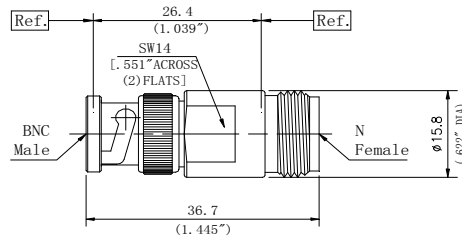Part no. Z345210Z01

VSWR DC-8GHz····1.15:1 (max)

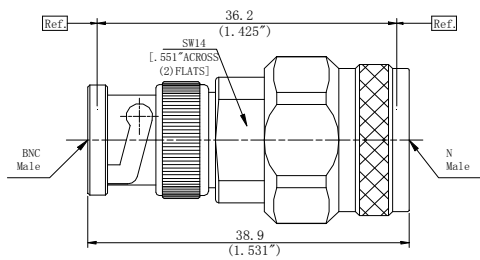Description N (f) to BNC (m)

Part no. Z345201Z01

VSWR DC-8GHz····1.15:1 (max)

Description N (m) to BNC (m)

Part no. Z345211Z01

VSWR DC-8GHz····1.15:1 (max)

✧ N-TNC Between Series Adapters(DC~11GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~11GHz


Durability: 500Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel-Polished&Passivated
Center Contact:Beryllium Copper Plated Gold(Per MIL-G-45204)


Insulators:PEI

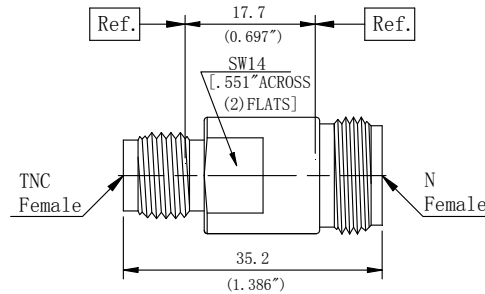Interface N Type/TNC Per MIL-STD-348A

Description N (f) to TNC (f)

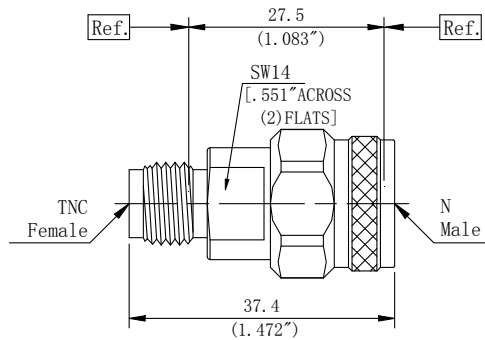
Part no. Z345300Z01

VSWR DC-11GHz····1.15:1 (max)

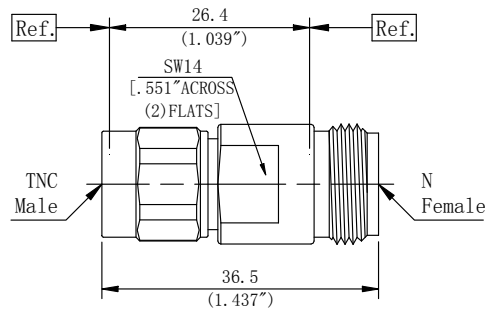Description N (m) to TNC (f)

Part no. Z345310Z01

VSWR DC-11GHz····1.15:1 (max)

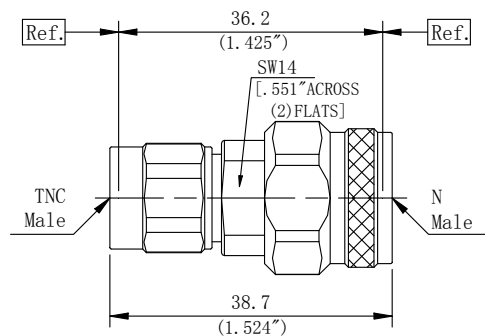Description N (f) to TNC (m)

Part no. Z345301Z01

VSWR DC-11GHz····1.15:1 (max)

Description N (m) to TNC (m)

Part no. Z345311Z01

VSWR DC-11GHz····1.15:1 (max)

✧ N-TNCA Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz


Durability: 500Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

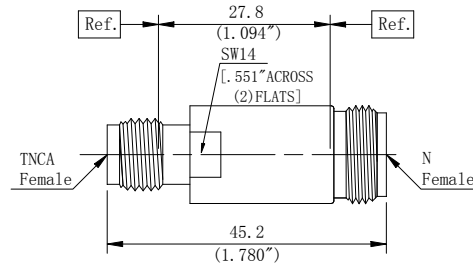Interface N Type/TNCA Per MIL-STD-348A

Description N (f) to TNCA (f)

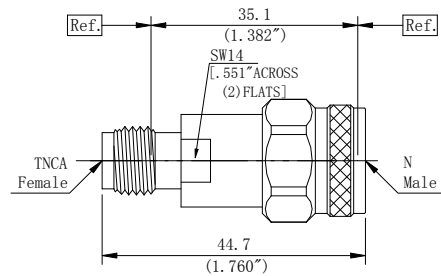
Part no. Z345400Z01

VSWR DC-18GHz····1.25:1 (max)

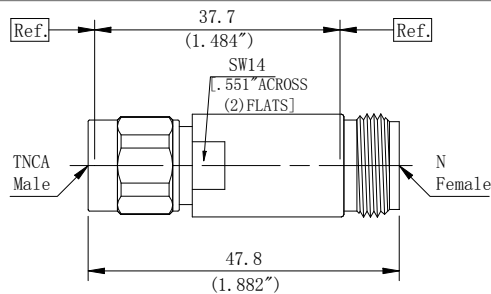Description N (m) to TNCA (f)


Part no. Z345410Z01

VSWR DC-18GHz····1.25:1 (max)

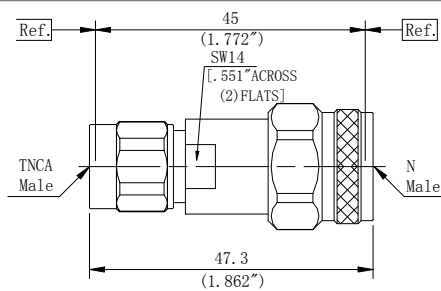Description N (f) to TNCA (m)

Part no. Z345401Z01

VSWR DC-18GHz····1.25:1 (max)

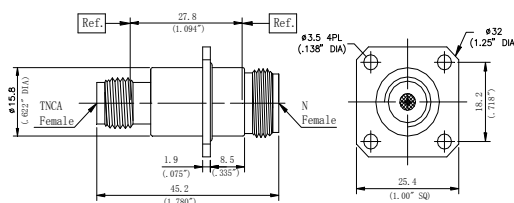Description N (m) to TNCA (m)

Part no. Z345411Z01

VSWR DC-18GHz····1.25:1 (max)

Description N (f) to TNCA (f)

Part no. Z345400FS10

VSWR DC-18GHz····1.15:1 (max)

✧ N-SMA Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated钝化

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI&PTFE

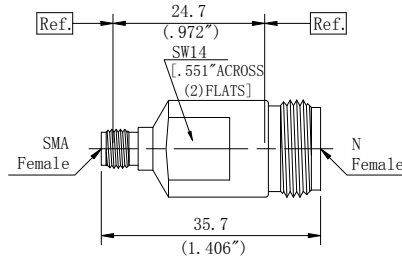Interface N Type/SMA Per MIL-STD-348A

Description N (f) to SMA (f)

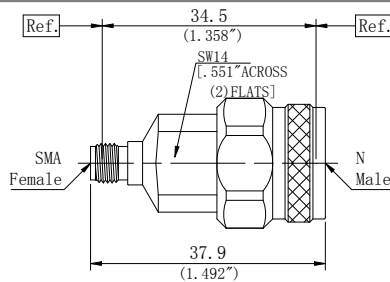
Part no. Z345500Z01

VSWR DC-18GHz····1.15:1 (max)

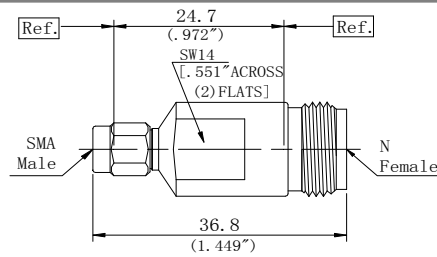Description N (m) to SMA (f)


Part no. Z345510Z01

VSWR DC-18GHz····1.15:1 (max)

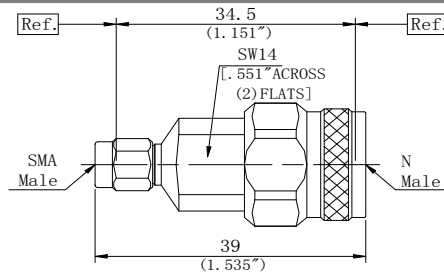Description N (f) to SMA (m)


Part no. Z345501Z01

VSWR DC-18GHz ·····1.15:1 (max)

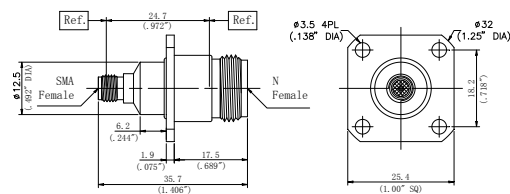Description N (m) to SMA (m)

Part no. Z345511Z01


VSWR DC-18GHz····1.15:1 (max)

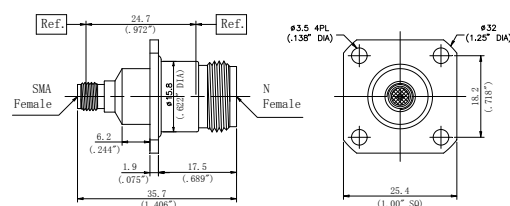Description N (f) to SMA (f)

Part no. Z345500FS10

VSWR DC-18GHz····1.15:1 (max)

Description N (f) to SMA (f)

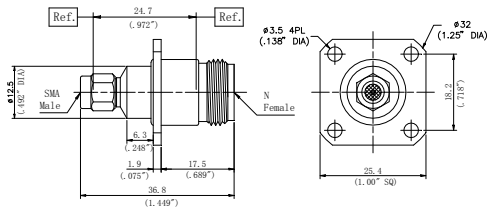Part no. Z345500FS10A


VSWR DC-18GHz····1.15:1 (max)



Description N (f) to SMA (m)

Part no. Z345501FS10



VSWR DC-18GHz····1.15:1 (max)

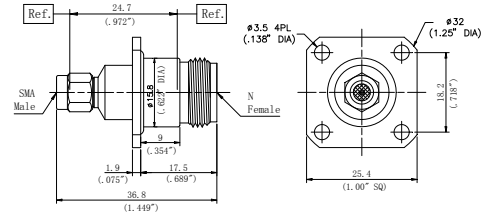

Description N (f) to SMA (m)

Part no. Z345501FS10A


VSWR DC-18GHz····1.15:1 (max)

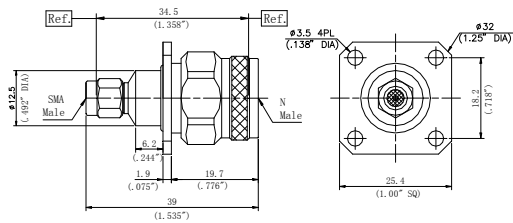

Description N (m) to SMA (m)

Part no. Z345511FS10


VSWR DC-18GHz····1.15:1 (max)

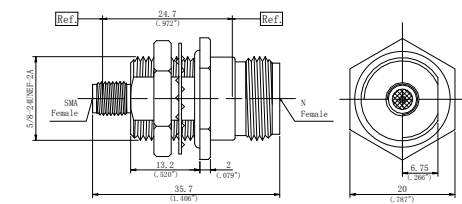

Description N (f) to SMA (f)

Part no. Z345500YS01

VSWR DC-18GHz····1.15:1 (max)

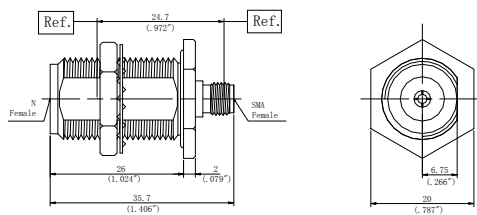

Description N (f) to SMA (f)

Part no. Z345500YS02

VSWR DC-18GHz····1.15:1 (max)

✧ 3.5mm-2.92mm Between Series Adapters (DC~33GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~33GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI


Interface

2.92mm Per MIL-STD-348A


3.5mm Per IEC-60169


Description 3.5mm (f) to 2.92mm (f)


Part no. Z353600Z01

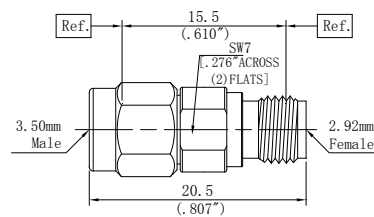VSWR DC-33GHz····1.15:1 (max)

Description 3.5mm (m) to 2.92mm (f)

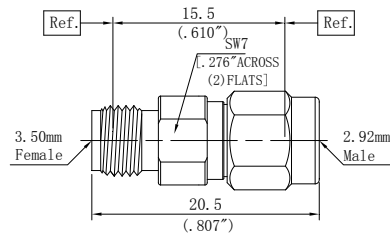
Part no. Z353610Z01

VSWR DC-33GHz ·····1.15:1 (max)

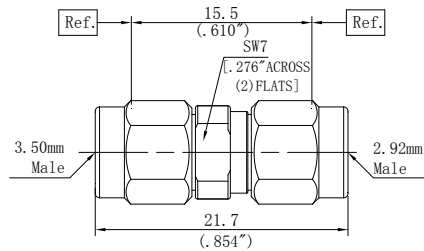Description 3.5mm (f) to 2.92mm (m)

Part no. Z353601Z01

VSWR DC-33GHz····1.15:1 (max)

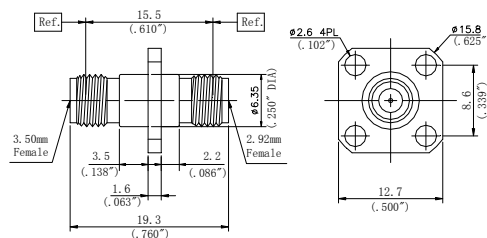Description 3.5mm (m) to 2.92mm (m)

Part no. Z353611Z01

VSWR DC-33GHz····1.15:1 (max)

Description 3.5mm (f) to 2.92mm (f)

Part no. Z353600F01

VSWR DC-33GHz····1.15:1 (max)

✧ 3.5mm-2.4mm Between Series Adapters (DC~33GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~33GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per

MIL-G-45204)


Insulators: PEI

Interface


3.5mm Per IEC 60169

2.4mm Per IEC


61169

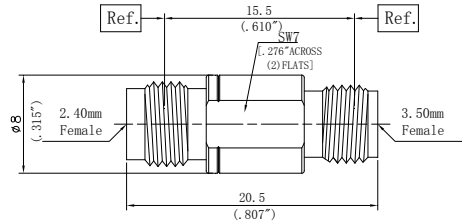
Description 3.5mm (f) to 2.4mm (f)


Part no. Z353700Z01

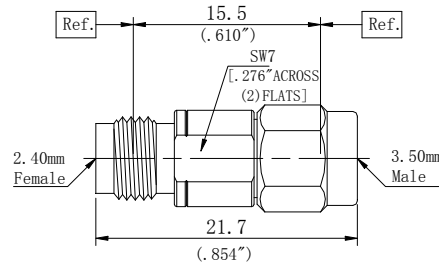VSWR DC-33GHz...1.15:1 (max)

Description 3.5mm (m) to 2.4mm (f)

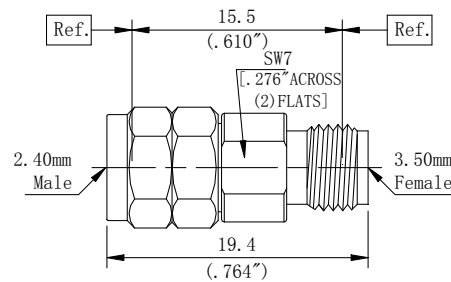Part no. Z353710Z01

VSWR DC-33GHz...1.15:1 (max)

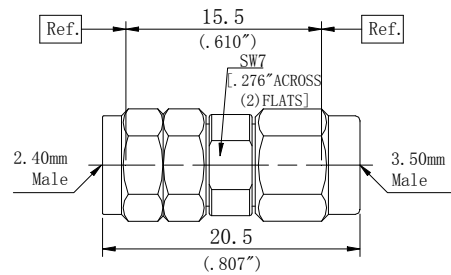Description 3.5mm (f) to 2.4mm (m)

Part no. Z353701Z01

VSWR DC-33GHz...1.15:1 (max)

Description 3.5mm (m) to 2.4mm (m)

Part no. Z353711Z01

VSWR DC-33GHz...1.15:1 (max)

✦ 3.5mm-1.85mm Between Series Adapter (DC~33GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~33GHz

Durability: 5000cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

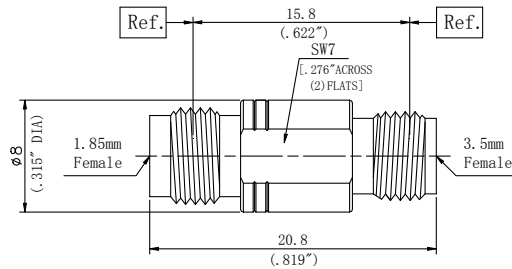Interface 3.5mm Per IEC-60169 1.85mm Per IEC 61169

Description 3.5mm (f) to 1.85mm (f)

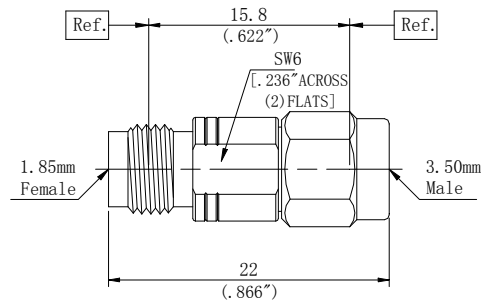
Part no. Z353800Z01

VSWR DC-33GHz~1.15:1 (max)

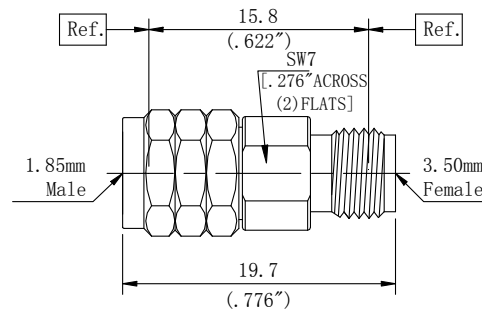Description 3.5mm (m) to 1.85mm (f)

Part no. Z353810Z01

VSWR DC-33GHz~1.15:1 (max)

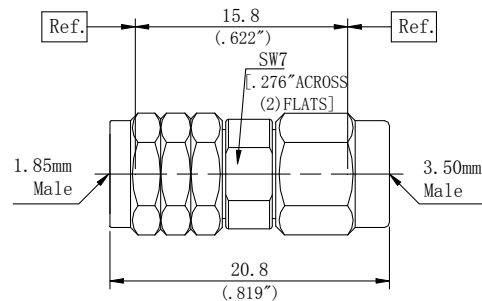Description 3.5mm (f) to 1.85mm (m)

Part no. Z353801Z01

VSWR DC-33GHz~1.15:1 (max)

Description 3.5mm (m) to 1.85mm (m)

Part no. Z353811Z01

VSWR DC-33GHz~1.15:1 (max)

✧ 3.5mm-SMA Between Series Adapters (DC~27GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~27GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated钝化

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI&PTFE

Interface


3.5mm Per IEC-60169

SMA Per


MIL-STD-348A

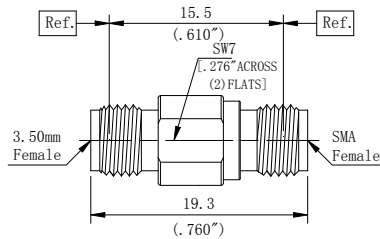
Description 3.5mm (f) to SMA (f)


Part no. Z355500Z01

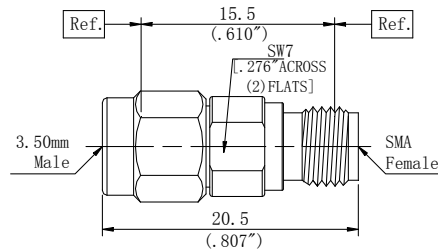VSWR DC-27GHz····1.15:1 (max)

Description 3.5mm (m) to SMA (f)

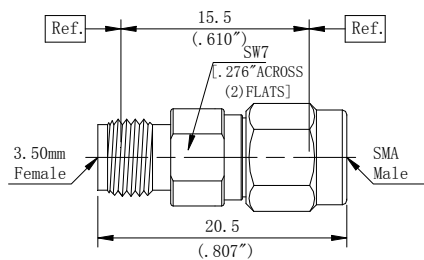Part no. Z355510Z01

VSWR DC-27GHz····1.15:1 (max)

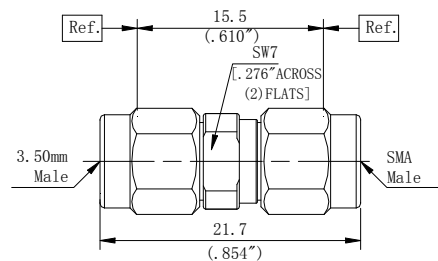Description 3.5mm (f) to SMA (m)

Part no. Z355501Z01

VSWR DC-27GHz····1.15:1 (max)

Description 3.5mm (m) to SMA (m)

Part no. Z355511Z01

VSWR DC-27GHz····1.15:1 (max)

✧ 2.92mm-2.4mm Between Series Adapters (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

Interface


2.92mm Per MIL-STD-348A

2.4mm Per IEC


61169

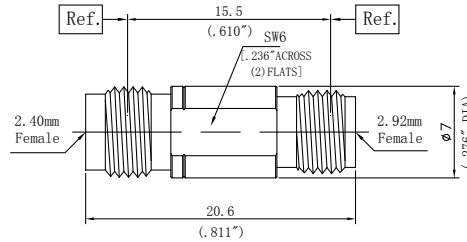
Description 2.92mm (f) to 2.4mm (f)


Part no. Z363700Z01

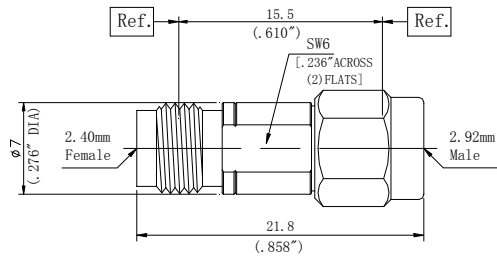VSWR DC-40GHz.....1.20:1 (max)

Description 2.92mm (m) to 2.4mm (f)

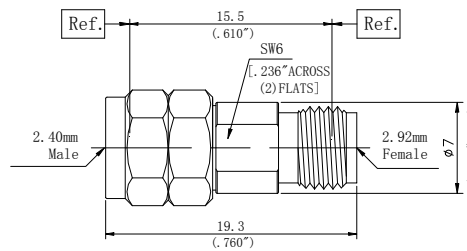
Part no. Z363710Z01

VSWR DC-40GHz.....1.15:1 (max)

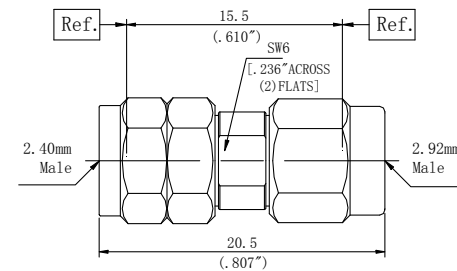Description 2.92mm (f) to 2.4mm (m)

Part no. Z363701Z01

VSWR DC-40GHz.....1.15:1 (max)

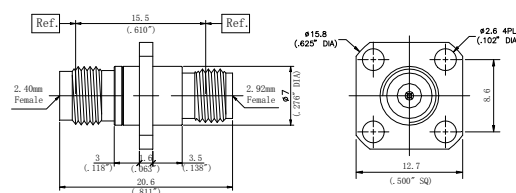Description 2.92mm (m) to 2.4mm (m)

Part no. Z363711Z01

VSWR DC-40GHz.....1.15:1 (max)

Description 2.92mm (f) to 2.4mm (f)

Part no. Z363700F01

VSWR DC-40GHz.....1.20:1 (max)

✧ 2.92mm-1.85mm Between Series Adapters (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

Durability: 5000cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

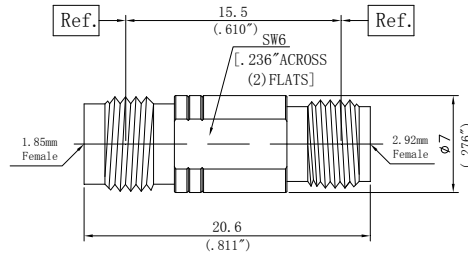Interface 2.92mm Per MIL-STD-348A 1.85mm Per IEC 61169

Description 2.92mm (f) to 1.85mm (f)

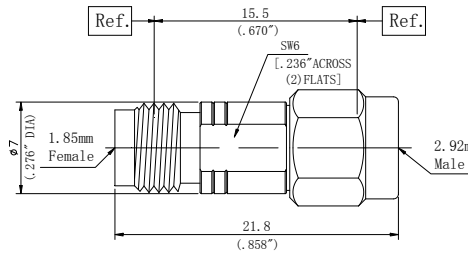
Part no. Z363800Z01

VSWR DC-40GHz····1.20:1 (max)

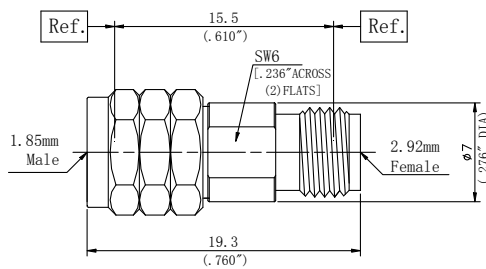Description 2.92mm (m) to 1.85mm (f)

Part no. Z363810Z01

VSWR DC-40GHz····1.15:1 (max)

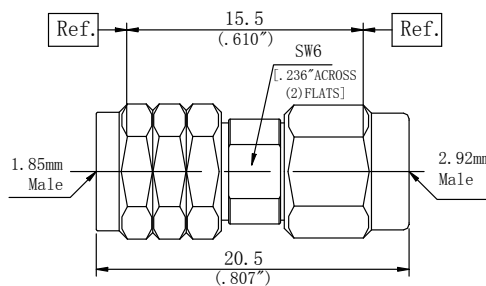Description 2.92mm (f) to 1.85mm (m)

Part no. Z363801Z01

VSWR DC-40GHz····1.15:1 (max)

Description 2.92mm (m) to 1.85mm (m)

Part no. Z363811Z01

VSWR DC-40GHz····1.15:1 (max)

✧ 2.92mm-SMA Between Series Adapters (DC~27GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~27GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated钝化

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI&PTFE

Interface


2.92mm/SMA Per MIL-STD-348A

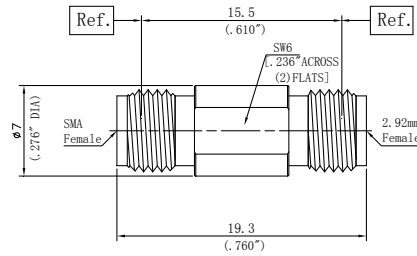
Description 2.92mm (f) to SMA (f)


Part no. Z365500Z01

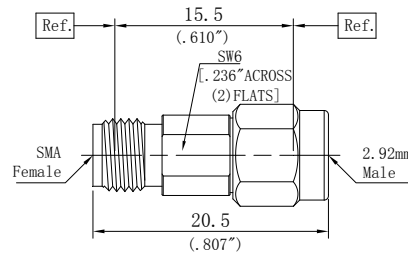VSWR DC-27GHz····1.15:1 (max)

Description 2.92mm (m) to SMA (f)

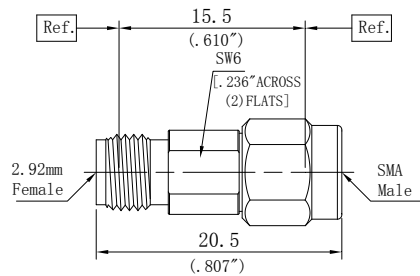Part no. Z365510Z01

VSWR DC-27GHz····1.15:1 (max)

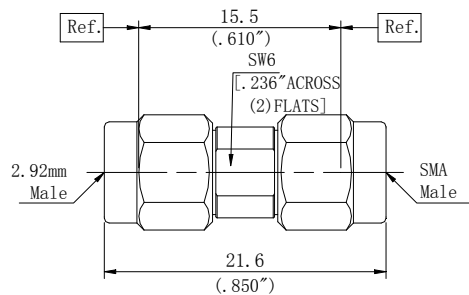Description 2.92mm (f) to SMA (m)

Part no. Z365501Z01

VSWR DC-27GHz····1.15:1 (max)

Description 2.92mm (m) to SMA (m)

Part no. Z365511Z01

VSWR DC-27GHz····1.15:1 (max)

❖ 2.92mm-SSMA Between Series Adapters (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

Durability: 5000cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated钝化
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface SSMA/2.92mm Per MIL-STD-348A

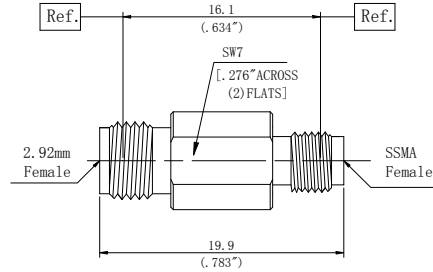
Description 2.92mm (f) to SSMA (f)


Part no. Z365700Z01

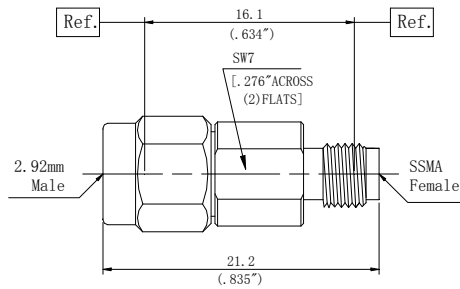VSWR DC-40GHz1.20:1 (max)

Description 2.92mm (m) to SSMA (f)

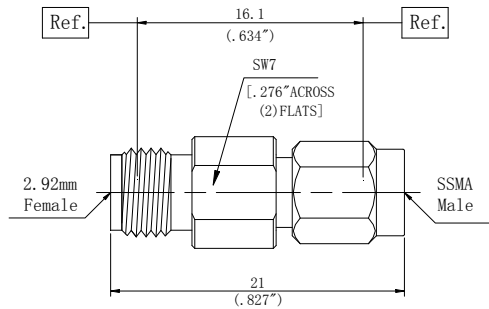Part no. Z365710Z01

VSWR DC-40GHz1.20:1 (max)

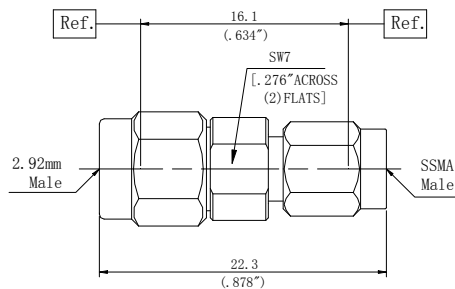Description 2.92mm (f) to SSMA (m)

Part no. Z365701Z01

VSWR DC-40GHz1.20:1 (max)

Description 2.92mm (m) to SSMA (m)

Part no. Z365711Z01

VSWR DC-40GHz1.20:1 (max)

2.4mm-1.85mm Between Series Adapters (DC~50GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~50GHz

Durability: 500Cycles


Operating Temperature: -55℃~+165℃

Materials/Finishes


Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

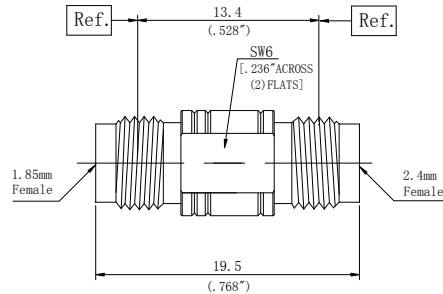Interface 2.4mm/1.85mm Per IEC 61169

Description 2.4mm (f) to 1.85mm (f)

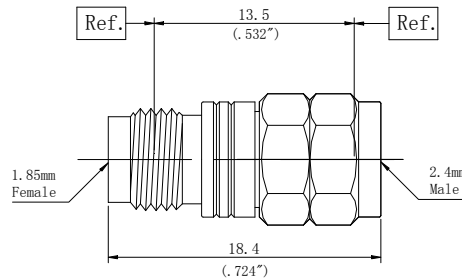
Part no. Z373800Z01

VSWR DC-50GHz····1.25:1 (max)

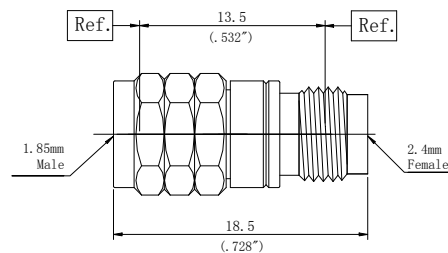Description 2.4mm (m) to 1.85mm (f)

Part no. Z373810Z01

VSWR DC-50GHz····1.25:1 (max)

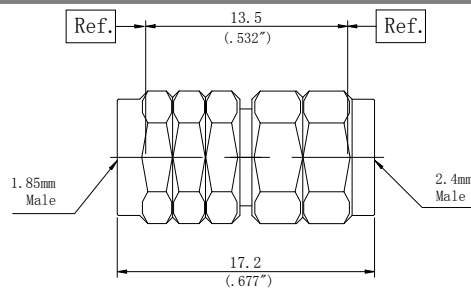Description 2.4mm (f) to 1.85mm (m)

Part no. Z373801Z01

VSWR DC-50GHz····1.25:1 (max)

Description 2.4mm (m) to 1.85mm (m)

Part no. Z373811Z01

VSWR DC-50GHz····1.25:1 (max)

❖ 2.4mm-SMA Between Series Adapters (DC~27GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~27GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

Materials/Finishes

Housing:Type 303 Stainless Steel -Polished&Passivated

Center Contact:Beryllium Copper Plated Gold(Per MIL-G-45204)


Insulators:PEI&PTFE

Interface


2.4mmPer IEC 61169

SMA Per


MIL-STD-348A

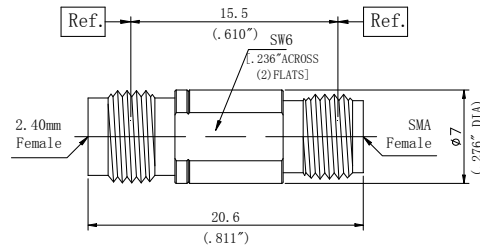
Description 2.4mm (f) to SMA (f)


Part no. Z375500Z01

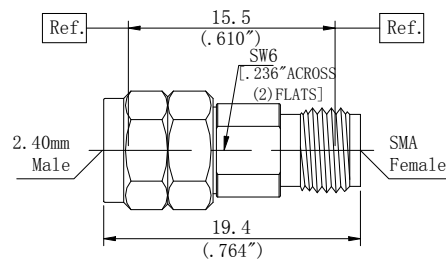VSWR DC-27GHz····1.15:1 (max)

Description 2.4mm (m) to SMA (f)

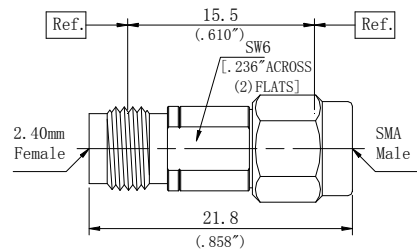Part no. Z375510Z01

VSWR DC-27GHz····1.15:1 (max)

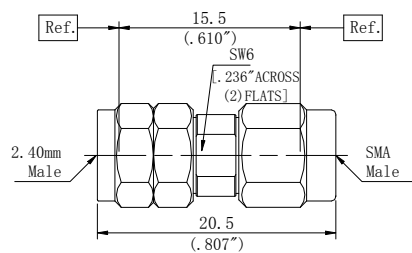Description 2.4mm (f) to SMA (m)

Part no. Z375501Z01

VSWR DC-27GHz····1.15:1 (max)

Description 2.4mm (m) to SMA (m)

Part no. Z375511Z01

VSWR DC-27GHz····1.15:1 (max)

❖ 2.4mm-SSMA Between Series Adapters (DC~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~40GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface SSMA/2.92mm Per MIL-STD-348A

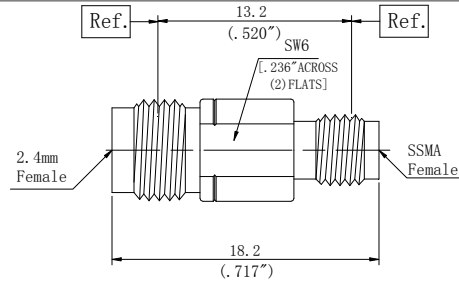
Description 2.4mm (f) to SSMA (f)


Part no. Z375700Z01

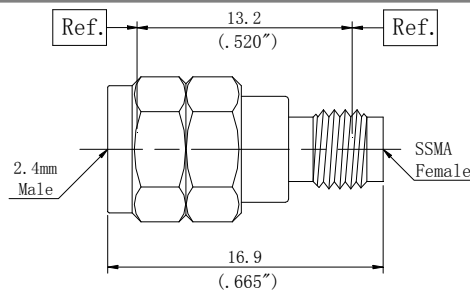VSWR DC-40GHz1.20:1 (max)

Description 2.4mm (m) to SSMA (f)

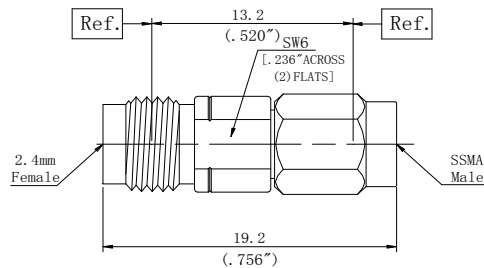Part no. Z375710Z01

VSWR DC-40GHz1.20:1 (max)

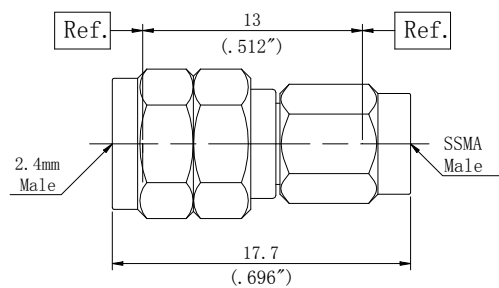Description 2.4mm (f) to SSMA (m)

Part no. Z375701Z01

VSWR DC-40GHz1.20:1 (max)

Description 2.4mm (m) to SSMA (m)

Part no. Z375711Z01

VSWR DC-40GHz1.20:1 (max)

✧ BNC-SMA Between Series Adapters (DC~8GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~8GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold(Per MIL-G-45204)

Insulators: PEI&PTFE


Interface BNC/SMA Per MIL-STD-348A

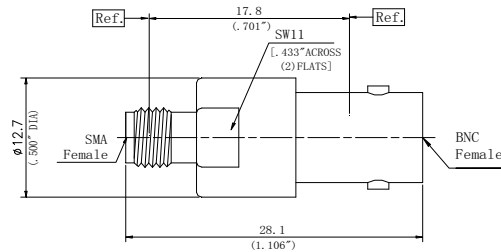

Description BNC (f) to SMA (f)

Part no. Z525500Z01


VSWR DC-8GHz1.15:1 (max)

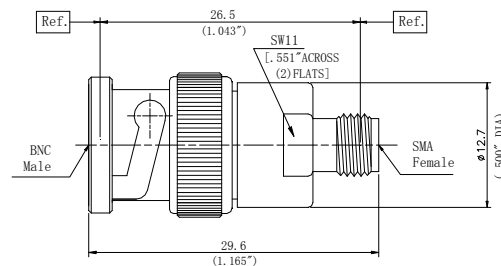

Description BNC (m) to SMA (f)

Part no. Z525510Z01


VSWR DC-8GHz1.15:1 (max)

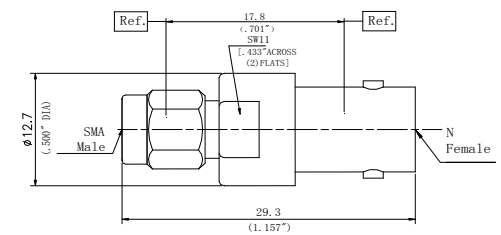

Description BNC (f) to SMA (m)

Part no. Z525501Z01

VSWR DC-8GHz1.15:1 (max)

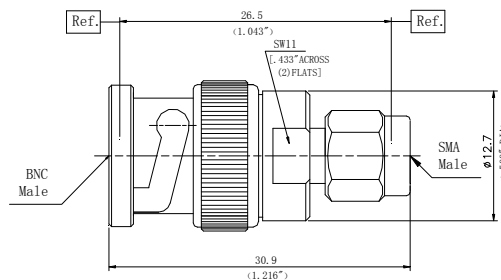

Description BNC (m) to SMA (m)

Part no. Z525511Z01

VSWR DC-8GHz1.15:1 (max)

✧ TNC-SMA Between Series Adapters (DC~11GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~11GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface TNC/SMA Per MIL-STD-348A

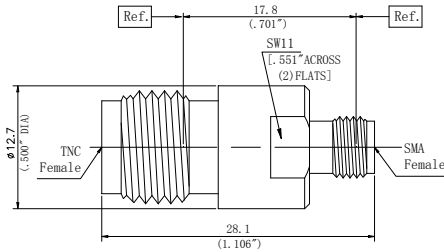
Description TNC (f) to SMA (f)


Part no. Z535500Z01

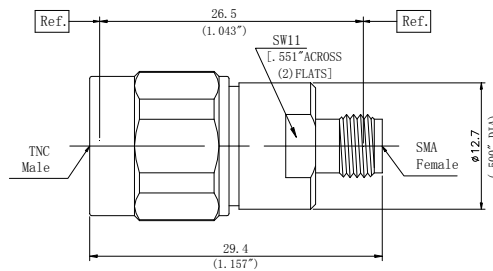VSWR DC-11GHz.....1.15:1 (max)

Description TNC (m) to SMA (f)

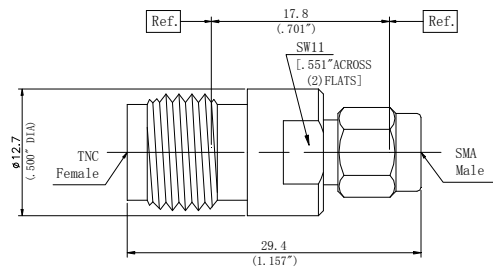Part no. Z535510Z01

VSWR DC-11GHz.....1.15:1 (max)

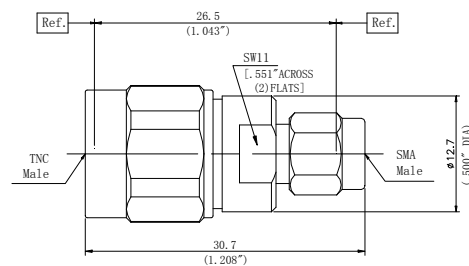Description TNC (f) to SMA (m)

Part no. Z535501Z01

VSWR DC-11GHz.....1.15:1 (max)

Description TNC (m) to SMA (m)

Part no. Z535511Z01

VSWR DC-11GHz.....1.15:1 (max)

✧ TNCA-SMA Between Series Adapters (DC~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~18GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface TNCA/SMA Per MIL-STD-348A

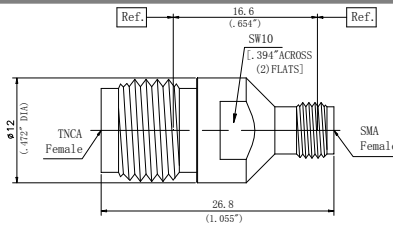

Description TNCA (f) to SMA (f)

Part no. Z545500Z01


VSWR DC-18GHz...1.25:1 (max)

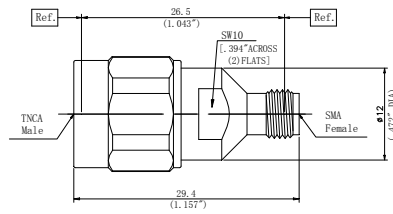

Description TNCA (m) to SMA (f)

Part no. Z545510Z01


VSWR DC-18GHz...1.25:1 (max)

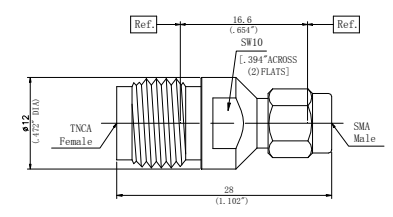

Description TNCA (f) to SMA (m)

Part no. Z545501Z01


VSWR DC-18GHz...1.25:1 (max)

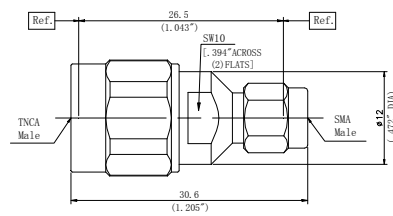

Description TNCA (m) to SMA (m)

Part no. Z545511Z01


VSWR DC-18GHz...1.25:1 (max)

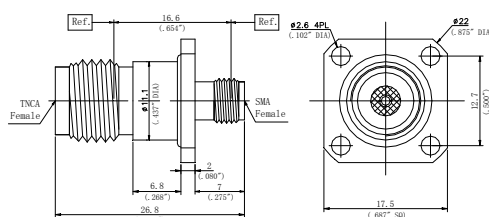

Description TNCA (f) to SMA (f)

Part no. Z545500FS09

VSWR DC-18GHz...1.15:1 (max)

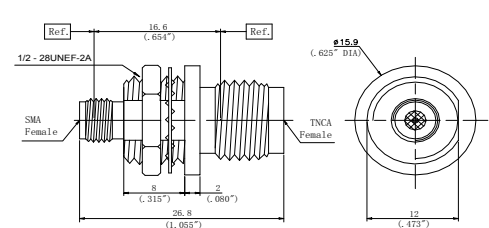

Description TNCA (f) to SMA (f)

Part no. Z545500Y01

VSWR DC-18GHz...1.15:1 (max)

✧ SMA-SSMA Between Series Adapters (DC~27GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~27GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated


Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI&PTFE


Interface SSMA/SMA Per MIL-STD-348A

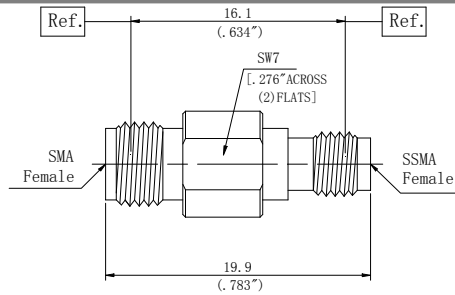
Description SMA (f) to SSMA (f)


Part no. Z555700Z01

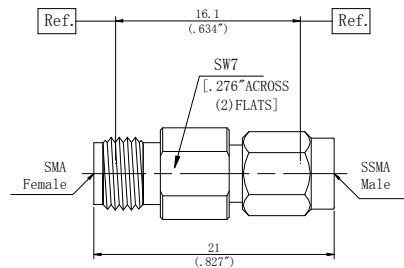VSWR DC-27GHz····1.15:1 (max)

Description SMA (f) to SSMA (m)

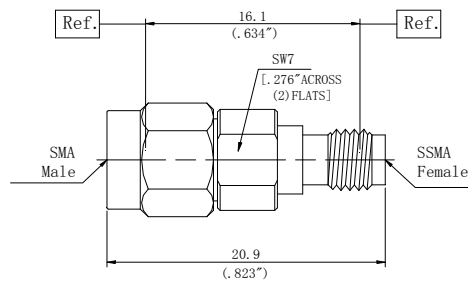Part no. Z555701Z01

VSWR DC-27GHz····1.15:1 (max)

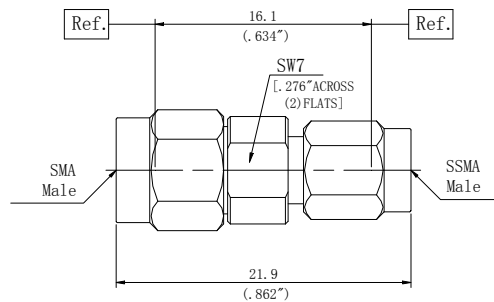Description SMA (m) to SSMA (f)

Part no. Z555710Z01

VSWR DC-27GHz····1.15:1 (max)

Description SMA (m) to SSMA (m)

Part no. Z555711Z01

VSWR DC-27GHz····1.15:1 (max)

❖ 7/16-N Between Series Adapters (DC~8GHz)

Performance Features

Impedance: 50Ω

Frequency Range: DC~8GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Materials/Finishes

Housing: Brass


Plated Ternary alloy

Center Contact: Beryllium Copper Plated Silver


Insulators: PEI

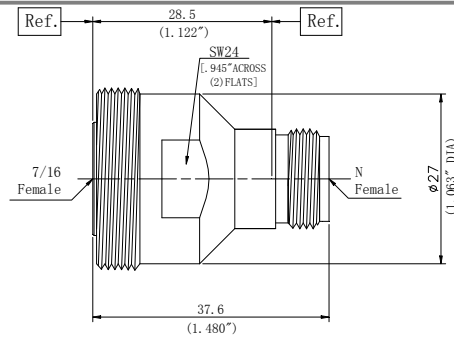Interface 7/16PerIEC 60169, N Per MIL-STD-348A

Description 7/16 (f) to N (f)

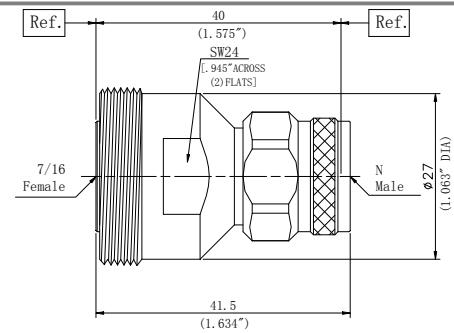
Part no. Z323400Z01

VSWR DC-8GHz····1.15:1 (max)

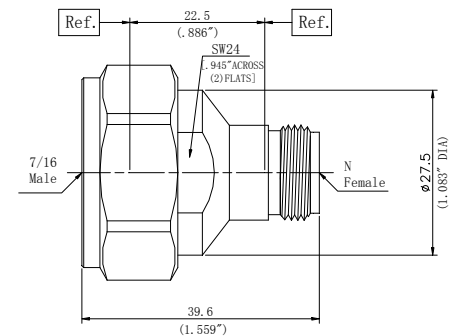Description 7/16 (m) to N (f)

Part no. Z323401Z01

VSWR DC-8GHz····1.15:1 (max)

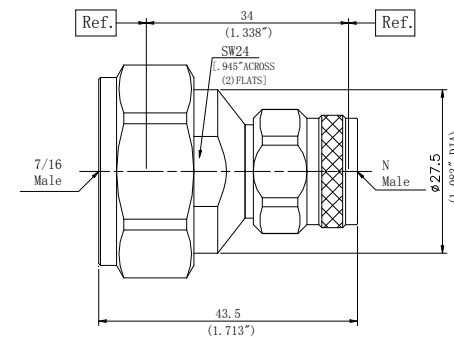Description 7/16 (m) to N (m)

Part no. Z323410Z01

VSWR DC-8GHz····1.15:1 (max)

Description 7/16 (m) to N (m)

Part no. Z323411Z01

VSWR DC-8GHz····1.15:1 (max)

Quick Replacement Adapters



Quick Replacement adapter's performance features

- 1、 Two types: Push and SELF LOCK
- 2、 Connects with standard female adapter, don't need to purchase quick replacement female adapter.

*Note: Part no. P-PUSH S-SELF LOCK

Performance Features

Impedance: 50Ω

Durability: 5000cycles

Operating Temperature: -55℃~+165℃


Interface N Type/SMA Per MIL-STD-348A

Materials/Finishes


Housing: Type 303 Stainless Steel-Polished&Passivated
Center Contact: Beryllium copper Plated Gold (Per MIL-G-45204)

Elastomer: Beryllium Plated Gold (Per MIL-G-45204)


Insulators: PEI or PEI&PTFE

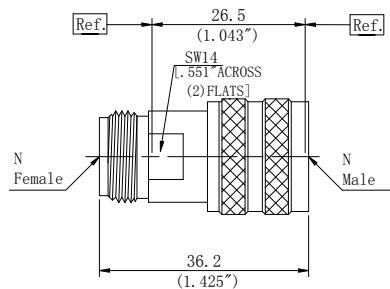

Description	N (m) to N (f)
Part no.	K343410P01
VSWR	DC~18GHz.....1.15:1 (max)
Quick replacement Type	Push

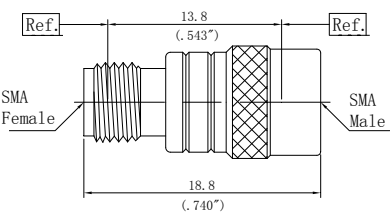

Description	SMA (m) to SMA (f)
Part no.	K555510P01
VSWR	DC~27GHz.....1.20:1 (max)
Quick replacement Type	Push

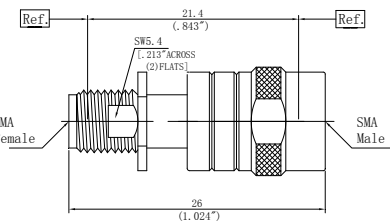

Description	SMA (m) to SMA (f)
Part no.	K555510S01
VSWR	DC~27GHz.....1.25:1 (max)
Quick replacement Type	SELF LOCK

Adapter Kits



All the adapter kits put in the wooden box in avoid to losing.



2.4mm Adapter Kits Part no. ZT37S		
Part no.	Description	Qty
Z373700Z01	2.4mm(f)-2.4mm(f)	2
Z373710Z01	2.4mm(m)-2.4mm(f)	2
Z373711Z01	2.4mm(m)-2.4mm(m)	2
Z353700Z01	2.4mm(f)-3.5mm(f)	2
Z353701Z01	2.4mm(m)-3.5mm(f)	2
Z353710Z01	2.4mm(f)-3.5mm(m)	2
Z353711Z01	2.4mm(m)-3.5mm(m)	2
Z363700Z01	2.4mm(f)-2.92mm(f)	2
Z363701Z01	2.4mm(m)-2.92mm(f)	2
Z363710Z01	2.4mm(f)-2.92mm(m)	2
Z363711Z01	2.4mm(m)-2.92mm(m)	2
Z375500Z01	2.4mm(f)-SMA(f)	2
Z375510Z01	2.4mm(m)-SMA(f)	2
Z375501Z01	2.4mm(f)-SMA(m)	2
Z375511Z01	2.4mm(m)-SMA(m)	2
Z343700Z01	2.4mm(f)-N(f)	2
Z343701Z01	2.4mm(m)-N(f)	2
Z343710Z01	2.4mm(f)-N(m)	2
Z343711Z01	2.4mm(m)-N(m)	2

2.92mm Adapter Kits Part no. ZT36S		
Part no.	Description	Qty
Z363600Z01	2.92mm(f)-2.92mm(f)	2
Z363610Z01	2.92mm(m)-2.92mm(f)	2
Z363611Z01	2.92mm(m)-2.92mm(m)	2
Z353600Z01	2.92mm(f)-3.5mm(f)	2
Z353601Z01	2.92mm(m)-3.5mm(f)	2
Z353610Z01	2.92mm(f)-3.5mm(m)	2
Z353611Z01	2.92mm(m)-3.5mm(m)	2
Z363700Z01	2.92mm(f)-2.4mm(f)	2
Z363710Z01	2.92mm(m)-2.4mm(f)	2
Z363701Z01	2.92mm(f)-2.4mm(m)	2
Z363711Z01	2.92mm(m)-2.4mm(m)	2
Z365500Z01	2.92mm(f)-SMA(f)	2
Z365510Z01	2.92mm(m)-SMA(f)	2
Z365501Z01	2.92mm(f)-SMA(m)	2
Z365511Z01	2.92mm(m)-SMA(m)	2
Z343600Z01	2.92mm(f)-N(f)	2
Z343601Z01	2.92mm(m)-N(f)	2
Z343610Z01	2.92mm(f)-N(m)	2
Z343611Z01	2.92mm(m)-N(m)	2

3.5mm Adapter Kits Part no. ZT35S		
Part no.	Description	Qty
Z353500Z01	3.5mm(f)-3.5mm(f)	2
Z353510Z01	3.5mm(m)-3.5mm(f)	2
Z353511Z01	3.5mm(m)-3.5mm(m)	2
Z353600Z01	3.5mm(f)-2.92mm(f)	2
Z353610Z01	3.5mm(m)-2.92mm(f)	2
Z353601Z01	3.5mm(f)-2.92mm(m)	2
Z353611Z01	3.5mm(m)-2.92mm(m)	2
Z343500Z01	3.5mm(f)-N(f)	2
Z343501Z01	3.5mm(m)-N(f)	2
Z343510Z01	3.5mm(f)-N(m)	2
Z343511Z01	3.5mm(m)-N(m)	2




RF Coaxial Termination



⊕	N type	DC~18GHz
⊕	TNCA	DC~18GHz
⊕	SMA	DC~18GHz
⊕	3.5mm	DC~27GHz
⊕	2.92mm	DC~40GHz
⊕	2.4mm	DC~40GHz
⊕	N/SMA	Quick
	Replacement	
	Termination	



Part Number Designation of Termination

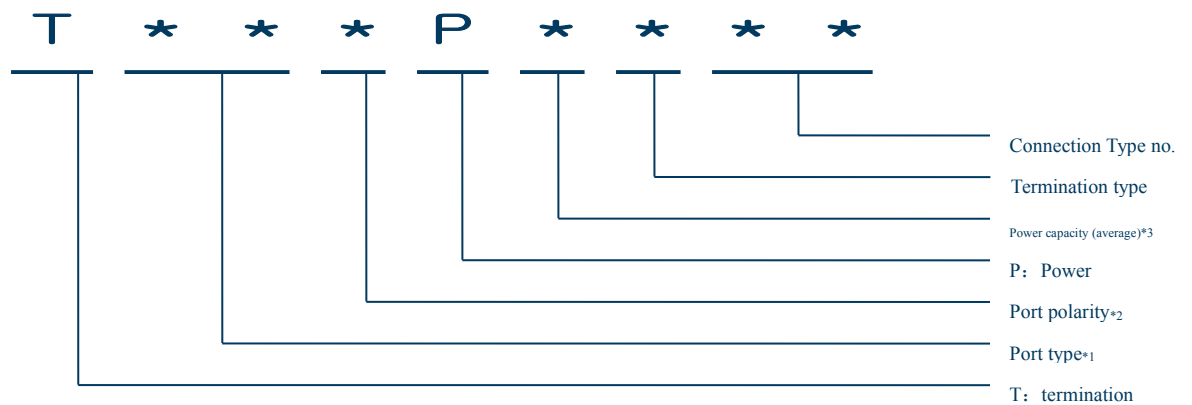

*1、Port Type

34	N type
35	3.5mm
36	2.92mm
37	2.4mm
55	SMA

*2、Port polarity

0	K/Jack/Female
1	J/Plug/Male

*3、Power Capacity (Average)

0	0.5W
1. 2. 3...	1. 2. 3...W

*4、Termination Type

Z	Straight Type
W	Right angle
F	Flange Type

RF Coaxial Termination

Performance Features

Impedance: 50Ω

Operating Temperature: -55℃~+125℃

Durability: 5000cycles

Materials/Finishes

Housing: Type 303 Stainless Steel-Polished&Passivated


Center Contact: Beryllium Copper Plated Gold

Interface

N Type/SMA/2.92mm Per: MIL-STD-348A

3.5mm Interface Per IEC 60169

2.4mm Interface Per IEC 61169

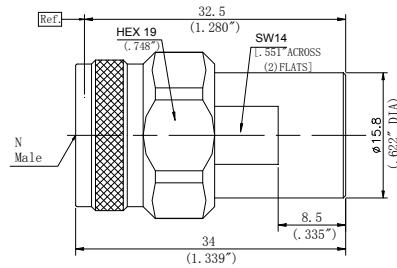

Description

N type(m) Termination

Part no.


T341P1Z01

VSWR

DC~18GHz.....1.15:1 (max)

Average Power

≤1W

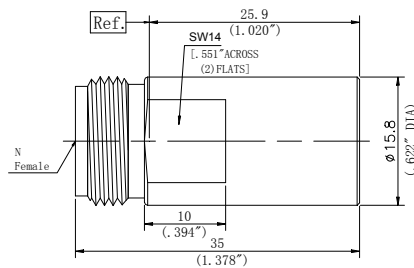

Description

N type(f) Termination

Part no.


T340P1Z01

VSWR

DC~18GHz.....1.15:1 (max)

Average Power

≤1W

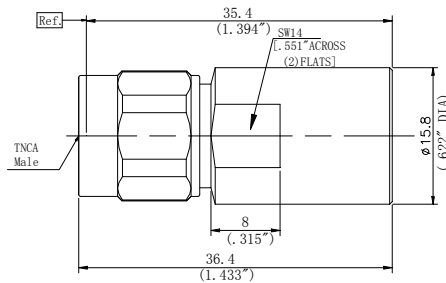

Description

TNC type(m) Termination

Part no.


T541P1Z01

VSWR

DC~18GHz.....1.25:1 (max)

Average Power

≤1W

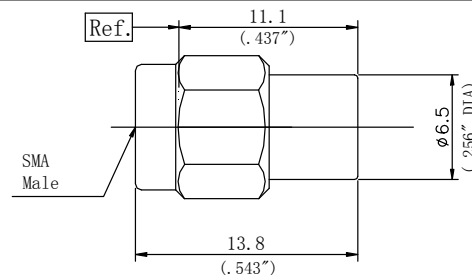

Description

SMA(m) Termination

Part no.


T551P1Z01

VSWR


DC~18GHz.....1.15:1 (max)

Average Power


≤1W

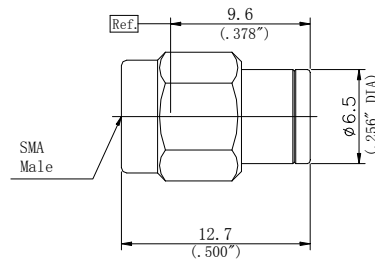


Description SMA(m) Termination
Part no. T551P2Z01
VSWR DC~18GHz····1.20:1 (max)
Average Power ≤2W

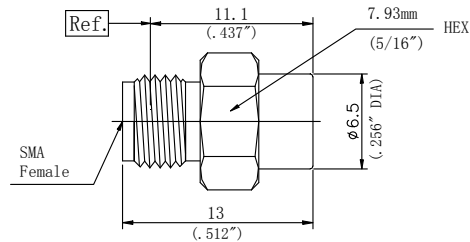


Description SMA(f) Termination
Part no. T550P1Z01
VSWR DC~18GHz····1.15:1 (max)
Average Power ≤1W

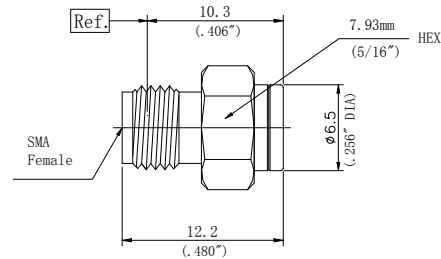


Description SMA(m) Termination
Part no. T550P2Z01
VSWR DC~18GHz····1.20:1 (max)
Average Power ≤2W

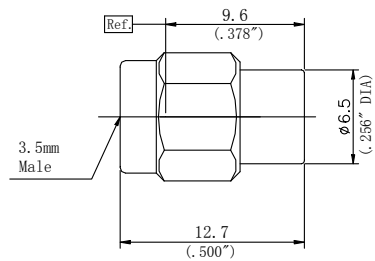


Description 3.5mm(m) Termination
Part no. T351P0Z01
VSWR DC~27GHz····1.15:1 (max)
Average Power ≤0.5W

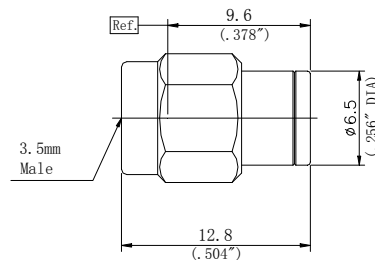


Description 3.5mm(m) Termination
Part no. T351P1Z01
VSWR DC~27GHz····1.20:1 (max)
Average Power ≤1W

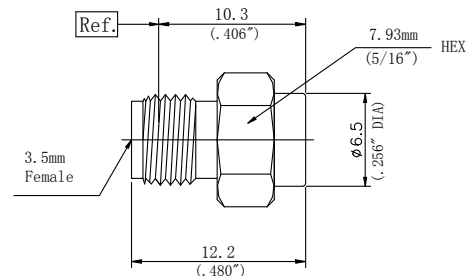


Description 3.5mm(f) Termination
Part no. T350P0Z01
VSWR DC~27GHz····1.15:1 (max)
Average Power ≤0.5W

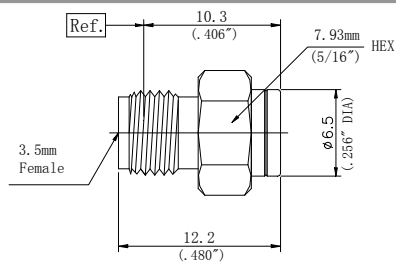


Description 3.5mm(f) Termination
Part no. T350P1Z01
VSWR DC~27GHz····1.20:1 (max)
Average Power ≤1W

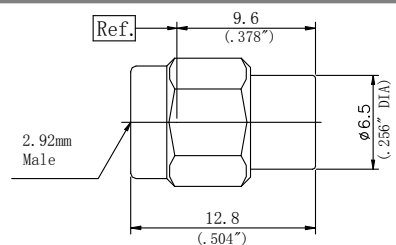


Description 2.92mm(m) Termination
Part no. T361P0Z01
VSWR DC~40GHz····1.20:1 (max)
Average Power ≤0.5W

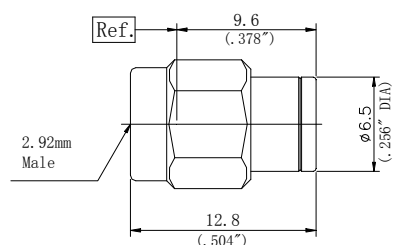


Description 2.92mm(m) Termination
Part no. T361P1Z01
VSWR DC~40GHz····1.25:1 (max)
Average Power ≤1W

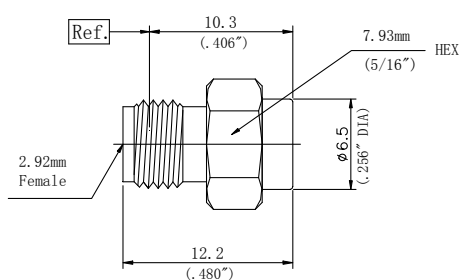


Description 2.92mm(f) Termination
Part no. T360P0Z01
VSWR DC~40GHz····1.20:1 (max)
Average Power ≤0.5W

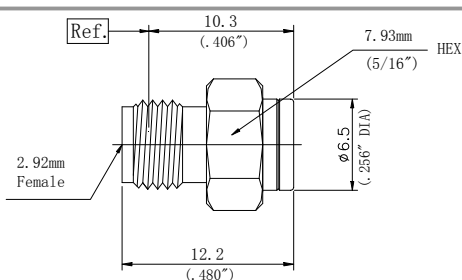


Description 2.92mm(f) Termination
Part no. T360P1Z01
VSWR DC~40GHz····1.25:1 (max)
Average Power ≤1W

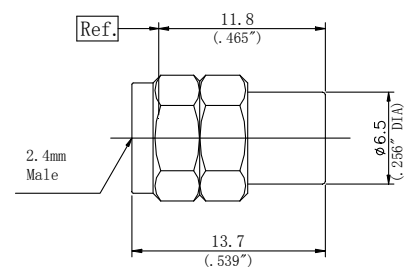


Description 2.4mm(m) Termination
Part no. T371P0Z01
VSWR DC~40GHz····1.25:1 (max)
Average Power ≤0.5W

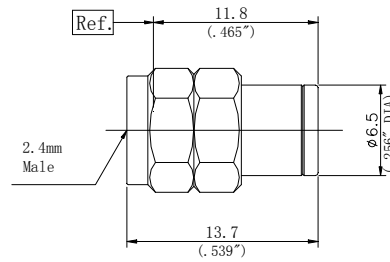


Description 2.4mm(m) Termination
Part no. T371P1Z01
VSWR DC~40GHz····1.30:1 (max)
Average Power ≤1W

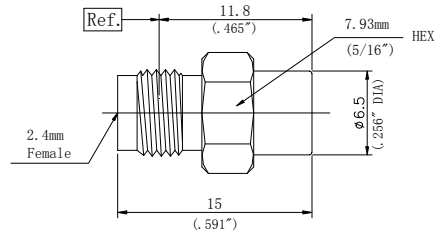


Description 2.4mm(f) Termination
Part no. T370P0Z01
VSWR DC~40GHz····1.25:1 (max)
Average Power ≤0.5W

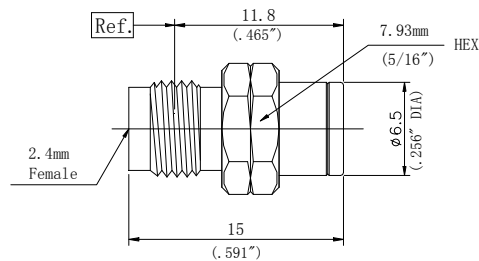

Description 2.4mm(f) Termination
Part no. T370P1Z01
VSWR DC~40GHz····1.30:1 (max)
Average Power ≤1W

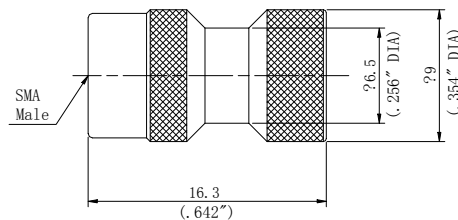

Description SMA(m)
quick mate Termination
Part no. TK551P1P01
VSWR DC~18GHz····1.15:1 (max)
Average Power ≤1W

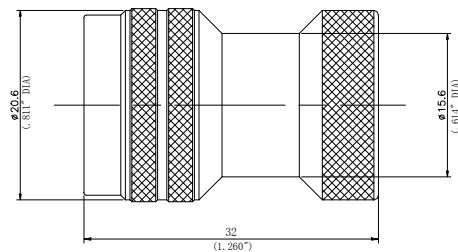

Description N type(m)
quick mate Termination
Part no. TK341P1P01
VSWR DC~18GHz····1.15:1 (max)
Average Power ≤1W




RF Coaxial Fixed Attenuator





Part Number Designation of Attenuator

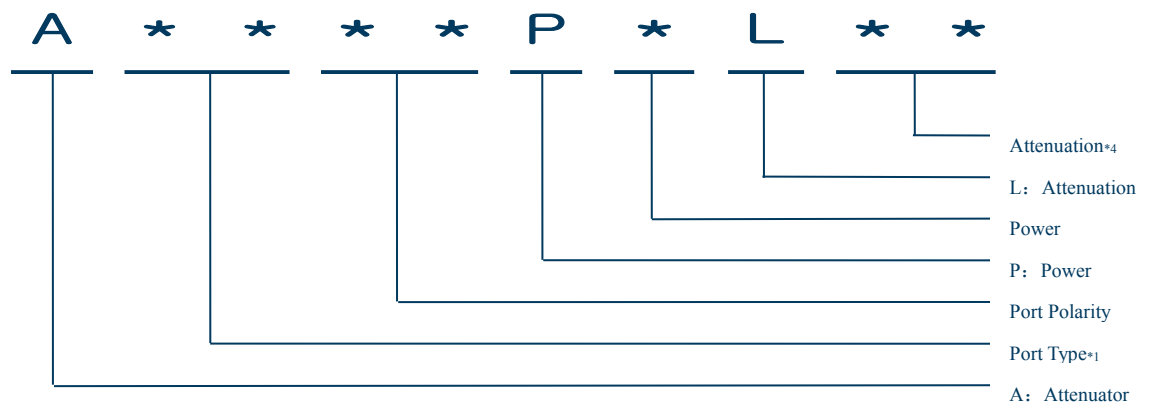

*1、Port Type

34	N type
35	3.5mm
36	2.92mm
37	2.4mm
55	SMA

*2、Port polarity

	Port1	Port2
10	K/Jack/Female	J/Plug/Male
11	J/Plug/Male	J/Plug/Male
00	K/Jack/Female	K/Jack/Female

*3、Power Capacity (Average)

0	0.5W
1.2.3...	1.2.3...W

*4、Attenuation

03	3dB
06	6dB
10	10dB
20	20dB
30	30dB



RF Coaxial Fixed Attenuator

Performance Features

Impedance: 50Ω

Operating Temperature: -55°C~+125°C

Durability: 500Cycles

Materials/Finishes


Housing: Type 303 Stainless Steel-Polished&Passivated

Center Contact: Beryllium Copper Plated Gold


Inter SMA/2.92mmPer: MIL-STD-348A

face 3.5mmInterface Per IEC 60169


2.4mmInterface Per IEC 61169

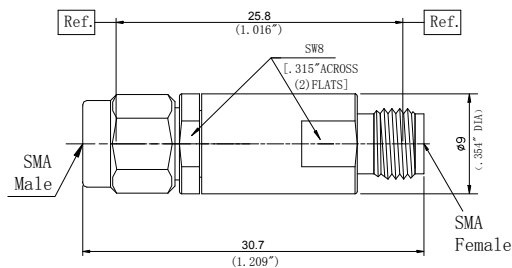


Part no.	A5510P2L03	A5510P2L06	A5510P2L10	A5510P2L20	A5510P2L30(R&D)
Description	SMA(m) to SMA(f)				
Length (mm)	30.7				
VSWR	DC~18GHz	1.25:1 (max)			
	18~27GHz	1.30:1 (max)			
Attenuation Accuracy	DC~18GHz	±0.5dB	±0.5dB	±0.5dB	±0.8dB
	18~27GHz	±0.8dB	±0.8dB	±0.8dB	±1.0dB
Average Power	DC~27GHz	≤2W			

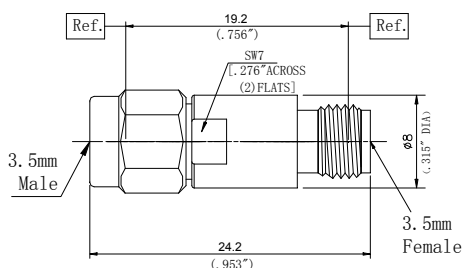

Part no.	A3510P1L03	A3510P1L06	A3510P1L10	A3510P1L20	A3510P1L30 (R&D)
Description	3.5mm(m) to 3.5mm(f)				
Length (mm)	24.2				
VSWR	DC~26.5GHz	1.30:1 (max)			
	26.5~33GHz	1.35:1 (max)			
Attenuation Accuracy	DC~26.5GHz	±0.5dB	±0.5dB	±0.5dB	±0.8dB
	26.5~33GHz	±0.8dB	±0.8dB	±0.8dB	±1.0dB
Average Power	DC~33GHz	≤1W			

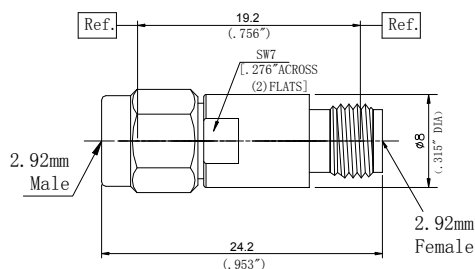

Part no.		A3610P0L03	A3610P0L06	A3610P0L10	A3610P0L20	A3610P0L30 (R&D)
Description		2.92mm(m) to 2.92mm(f)				
Length (mm)		24.2				
VSWR	DC~26.5GHz	1.35:1 (max)				
	26.5~40GHz	1.40:1 (max)				
Attenuation Accuracy	DC~26.5GHz	±0.5dB		±0.6dB		±0.8dB
	26.5~40GHz	±0.8dB		±1.0dB		±1.0dB
Average Power	DC~26.5GHz	≤0.5W				

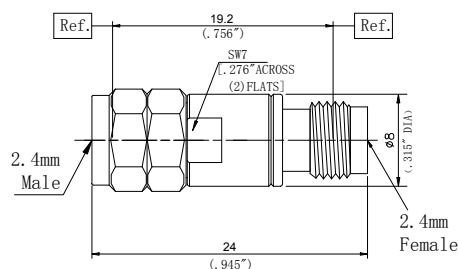

Part no.		A3710P0L03	A3710P0L06	A3710P0L10	A3710P0L20	A3710P0L30 (R&D)
Description		2.4mm(m) to 2.4mm(f)				
Length (mm)		24				
VSWR	DC~26.5GHz	1.35:1 (max)				
	26.5~40GHz	1.45:1 (max)				
	40~50GHz	1.60:1 (max)				
Attenuation Accuracy	DC~26.5GHz	±0.5dB				±0.75dB
	26.5~40GHz	±1.0dB				±1.25dB
	40~50GHz	±1.5dB				±2.0dB
Average Power	DC~26.5GHz	≤0.5W				


Waveguide-Coaxial Adapter



⌀	2.92mm to WR28	26.5~40GHz
⌀	2.4mm to WR28	26.5~40GHz
⌀	2.92mm to WR22	33~40GHz
⌀	2.4mm to WR22	33~50GHz



Part Number Designation of Waveguide -Coaxial Adapter

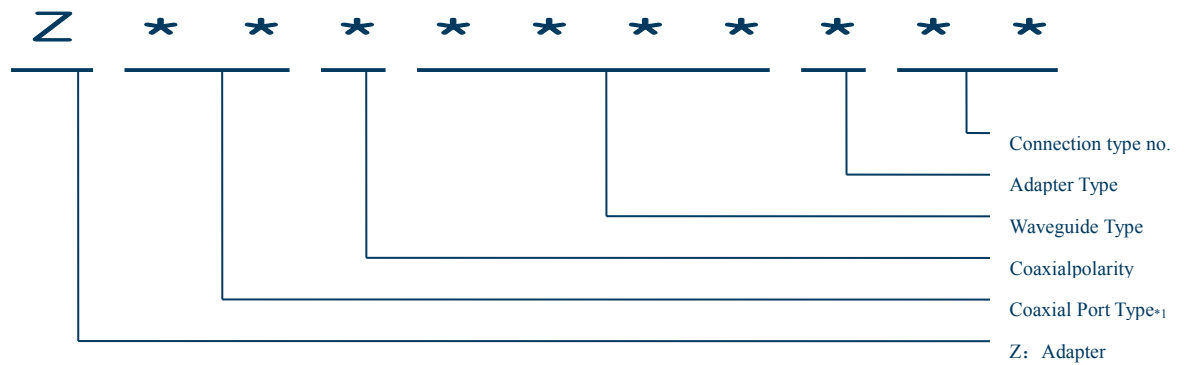

*1、Coaxial Port Type

36	2.92mm
37	2.4mm

*2、Coaxial Port Polarity

0	K/Jack/Female
1	J/Plug/Male

*3 Adapter Type

Z	bonded structure
W	orthorhombic structure



Waveguide-Coaxial Adapter

Performance Features

Impedance: 50Ω

Operating Temperature: -55℃~+125℃

Durability: 500Cycles





Materials/Finishes



Adapter Housing: Type 303 Stainless Steel-Polished&Passivated

Waveguide Housing: Brass Plated Gold



Interface

2.92mmPerMIL-STD-348A 2.4mmPer IEC 61169

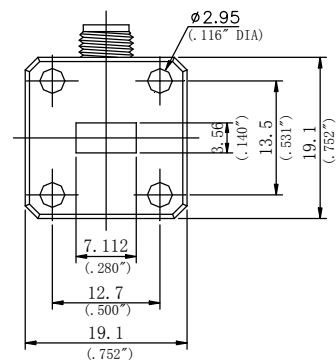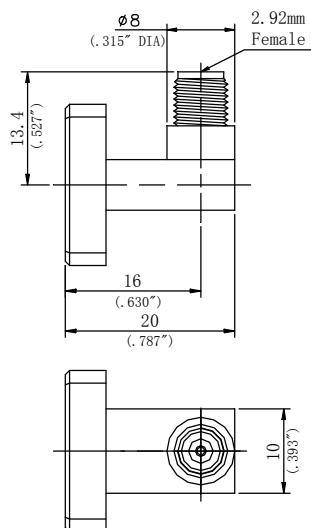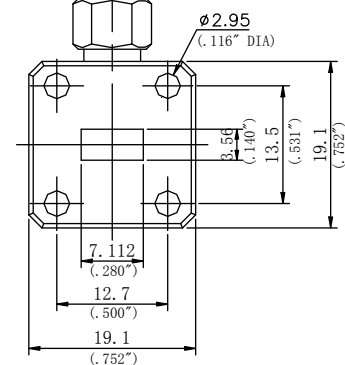
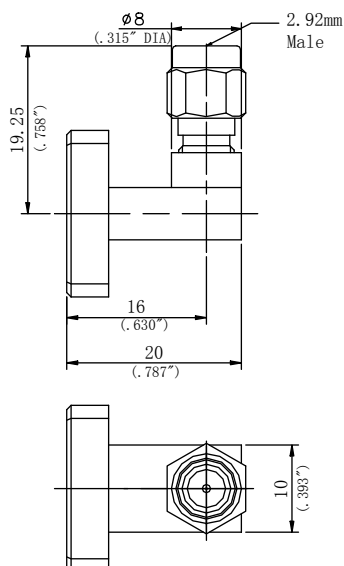
**Description** 2.92mm(f)-WR28**Part no.** Z360WR28Z01**Frequency Range** 26.5GHz~40GHz**VSWR** 1.25:1(max)**Description** 2.92mm(m)-WR28**Part no.** Z361WR28Z01**Frequency Range** 26.5GHz~40GHz**VSWR** 1.25:1(max)

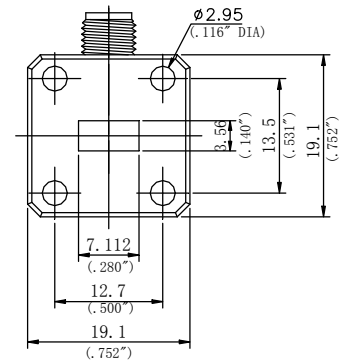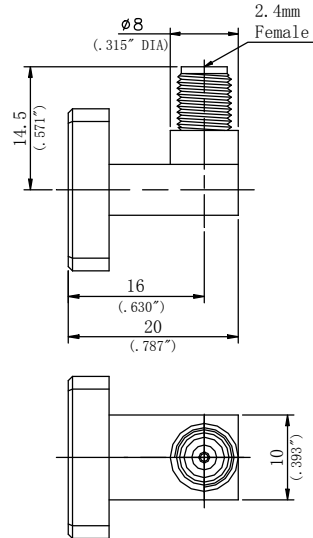



Description	2.4mm(f)-WR28
Part no.	Z370WR28Z01
Frequency Range	26.5GHz~40GHz
VSWR	1.25:1(max)

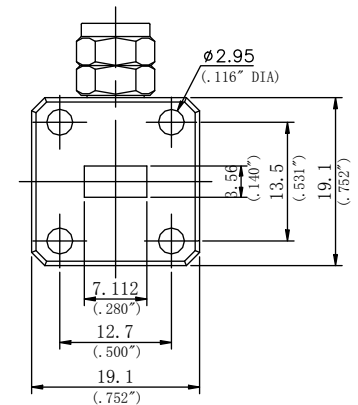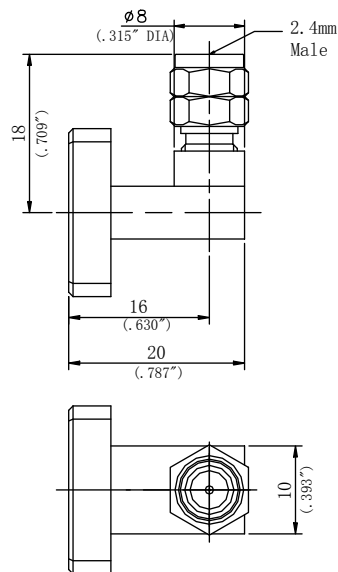



Description	2.4mm(m)-WR28
Part no.	Z371WR28Z01
Frequency Range	26.5GHz~40GHz
VSWR	1.25:1(max)

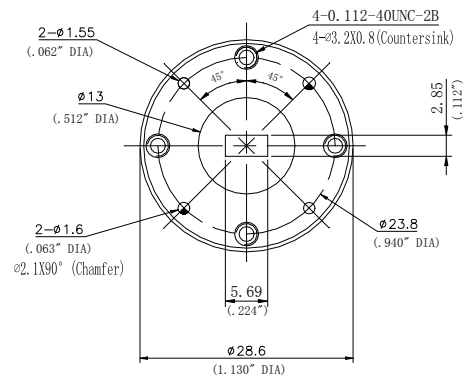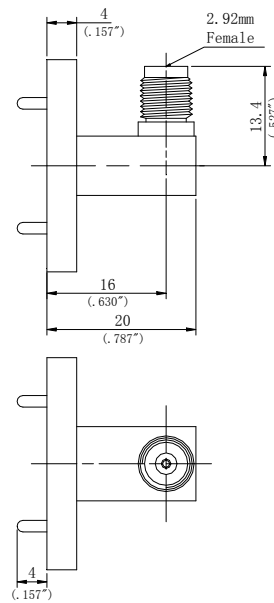



Description	2.92mm(f)-WR22
Part no.	Z360WR22Z03
Frequency Range	33GHz~40GHz
VSWR	1.30:1(max)

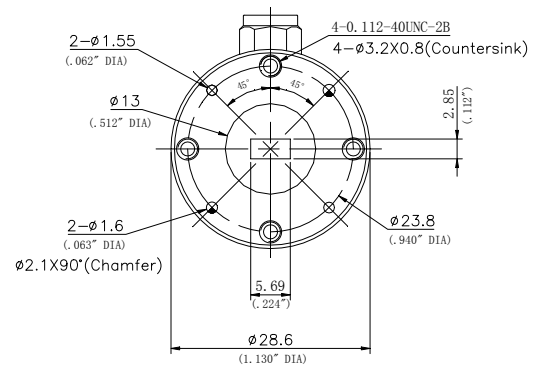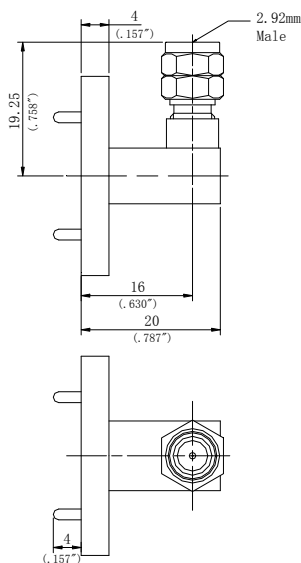

Description	2.92mm(m)-WR22
Part no.	Z361WR22Z03
Frequency Range	33GHz~40GHz
VSWR	1.30:1(max)

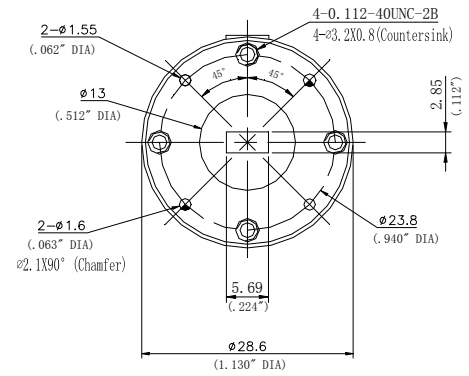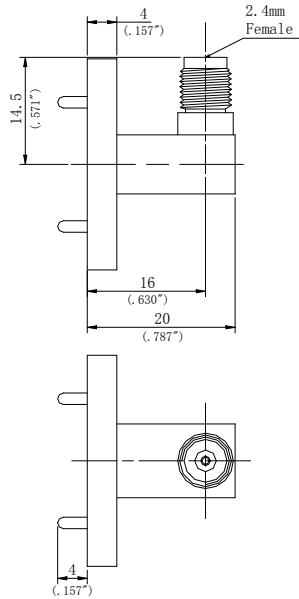

Description	2.4mm(f)-WR22
Part no.	Z370WR22Z03
Frequency Range	33GHz~50GHz
VSWR	1.35:1(max)

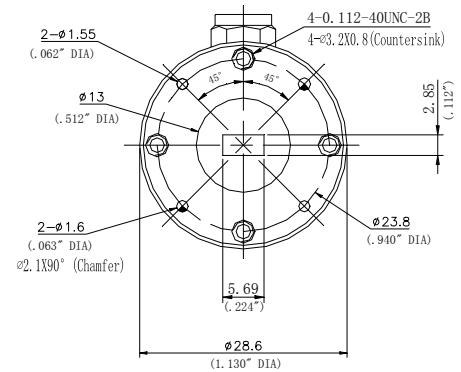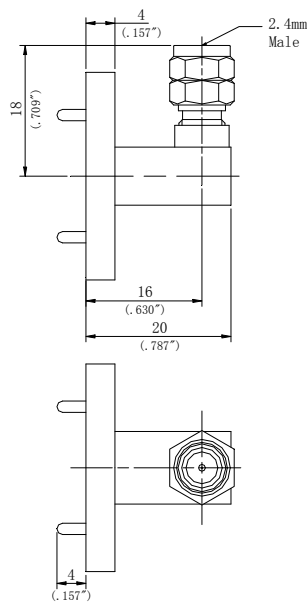

Description	2.4mm(m)-WR22
Part no.	Z371WR22Z03
Frequency Range	33GHz~50GHz
VSWR	1.35:1(max)




DC Block





Part Number Designation of DC Block

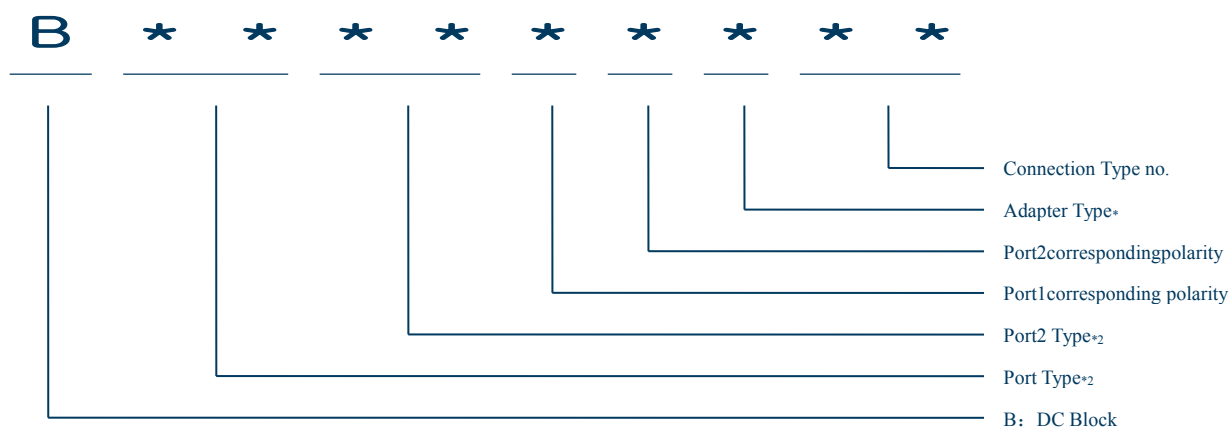

*1、Coaxial Port Type

34	N Type
35	3.5mm
36	2.92mm
37	2.4mm
55	SMA

*2、Coaxial Port Polarity

0	K/Jack/Female
1	J/Plug/Male

*3、Adapter Type

N	Straight Type
---	---------------



✧ SMA-SMA DC Block (30MHz~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: 30MHz~26.5GHz

Durability: 500Cycles

Operating Temperature: -55℃~+165℃

VSWR:

30MHz~18GHz...1.20:1 (max)

(Insertion Loss): 0.8dB(max)

Working Voltage: 50 VOLTS


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PTFE&PEI

Interface SMA Per MIL-STD-348A

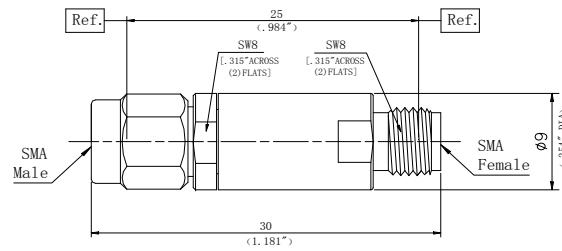


Description

SMA (m) to SMA (f)

Part no.

B5510N01

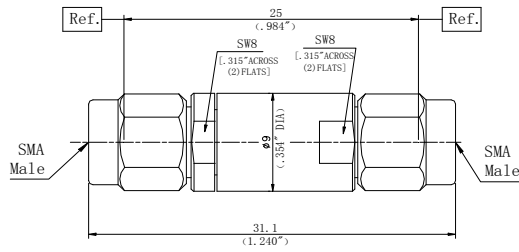


Description

SMA (m) to SMA (m)

Part no.

B5511N01

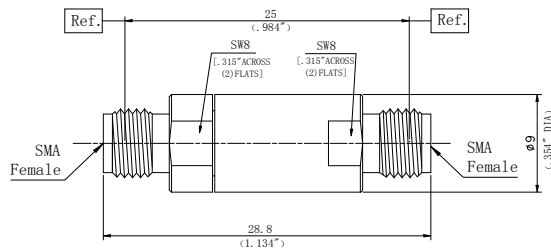

Description

SMA (f) to SMA (f)

Part no.

B5500N01



✧ 3.5mm-3.5mm DC Block (30MHz~26.5GHz)

Performance Features

Impedance: 50Ω

Frequency Range: 30MHz~26.5GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

VSWR:

30MHz~26.5GHz: 1.25:1 (max)

(Insertion Loss): 0.6dB(max)

Working Voltage (Working Voltage): 50 VOLTS


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI

Interface 3.5mm Per IEC-60169

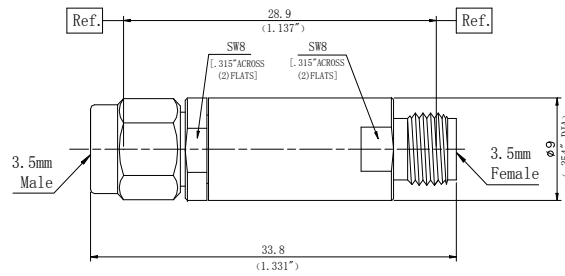


Description

3.5mm (m) to 3.5mm (f)

Part no.

B3510N01

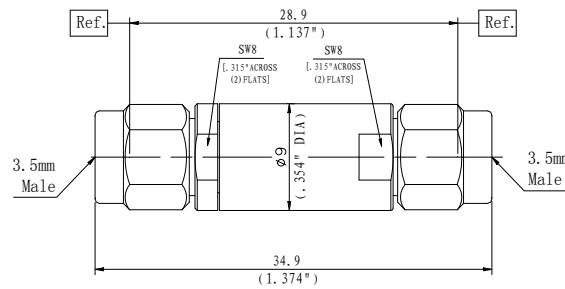


Description

3.5mm (m) to 3.5mm (m)

Part no.

B3511N01

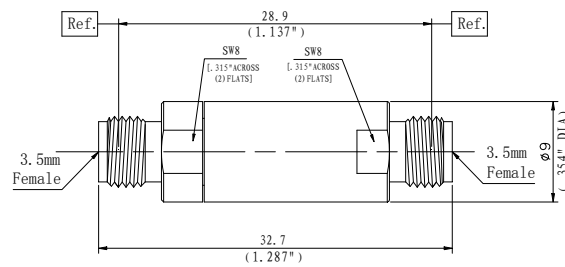

Description

3.5mm (f) to 3.5mm (f)

Part no.

B3500N01



✧ 2.92mm-2.92mm DC Block (30MHz~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: 30MHz~40GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

VSWR:

30MHz~40GHz...1.30:1 (max)

(Insertion Loss): 0.8dB(max)


(Working Voltage): 50 VOLTS

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI

Interface 2.92mm Per MIL-STD-348A

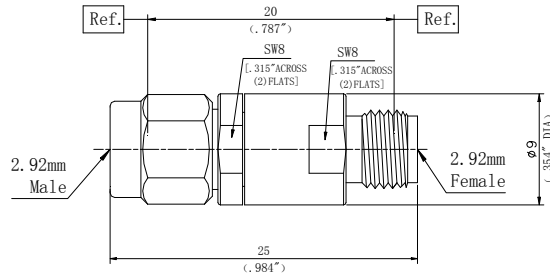


Description

2.92mm (m) to 2.92mm (f)

Part no.

B3610N01

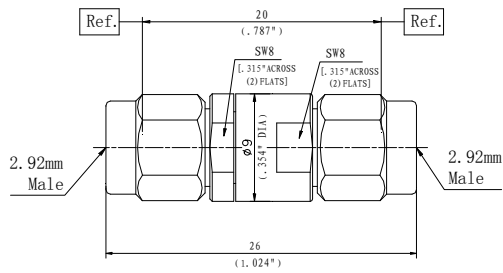


Description

2.92mm (m) to 2.92mm (m)

Part no.

B3611N01

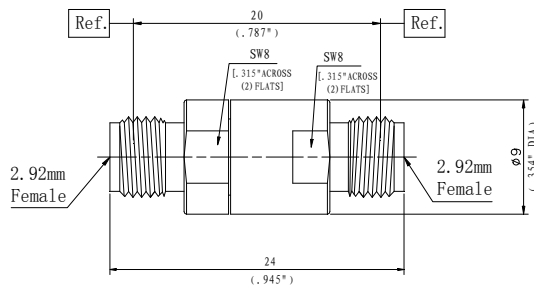

Description

2.92mm (f) to 2.92mm (f)

Part no.

B3600N01



❖ 2.4mm-2.4mm DC Block (30MHz~40GHz)

Performance Features

Impedance: 50Ω

Frequency Range: 30MHz~50GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

VSWR:

30MHz~40GHz: 1.25:1 (max)

(Insertion Loss): 0.8dB(max)


(Working Voltage): 50 VOLTS

Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated
Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)


Insulators: PEI

Interface 2.4mm Per IEC 61169

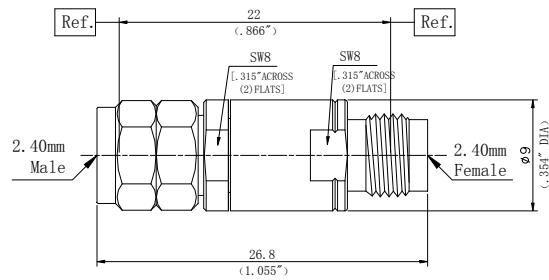


Description 2.4mm (m) to 2.4mm (f)

Part no. B3710N01

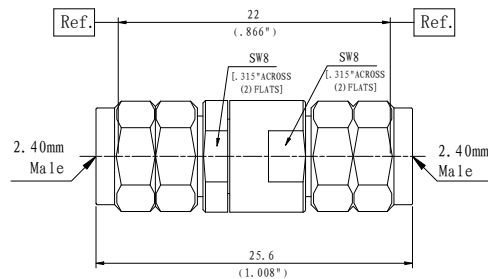

Description 2.4mm (m) to 2.4mm (m)

Part no. B3711N01

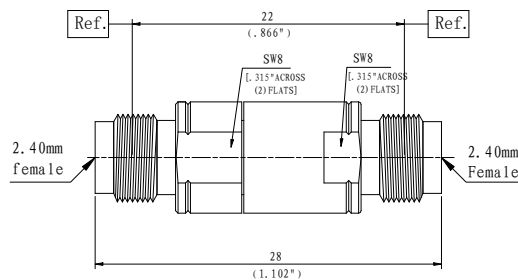

Description 2.4mm (f) to 2.4mm (f)

Part no. B3700N01



✧ N-N DC Block (10MHz~18GHz)

Performance Features

Impedance: 50Ω

Frequency Range: 10MHz~18GHz

Durability: 5000cycles

Operating Temperature: -55℃~+165℃

VSWR:

10MHz~18GHz...1.25:1 (max)

Insertion Loss: 0.6dB(max)

Working Voltage: 50 VOLTS


Materials/Finishes

Housing: Type 303 Stainless Steel -Polished&Passivated

Center Contact: Beryllium Copper Plated Gold (Per MIL-G-45204)

Insulators: PEI

Interface N Per MIL-STD-348A

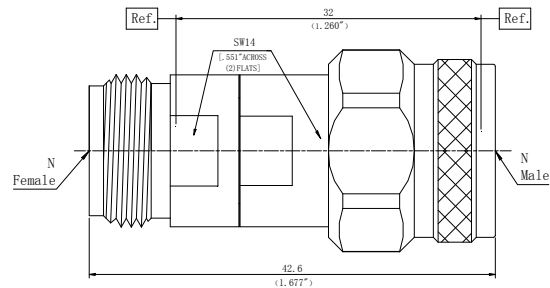


Description

N (m) to N (f)

Part no.

B3410N01

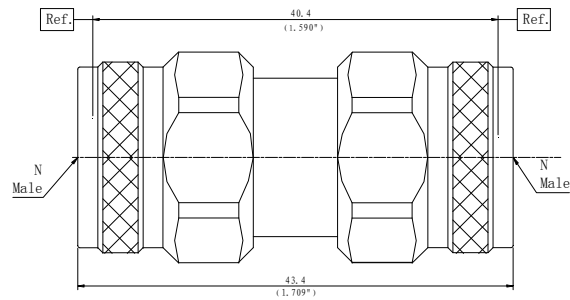


Description

N (m) to N (m)

Part no.

B3411N01

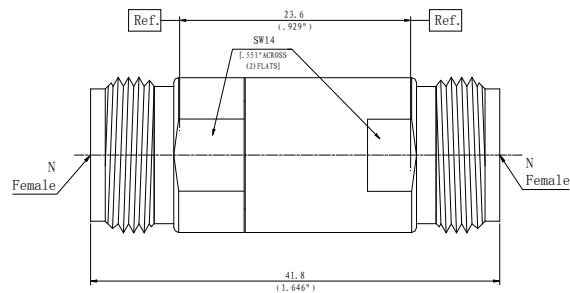

Description

N (f) to N (f)

Part no.

B3400N01



Tools




**Glass Bead Installation
Tools**



**Thread-in Adapter
Installation Tools**


Glass Bead Installation Tools–Flange Connector

a. Seal Solder Fixture




Part no.	GF122	GF102	GF090	GF086
Hole Distance	12.2mm/0.480"	10.2mm/0.400"	8.9mm/0.350"	8.6mm/0.340"
Flange	F01/F04	F03/F05	F02/F06	F07

b. Centering Tool

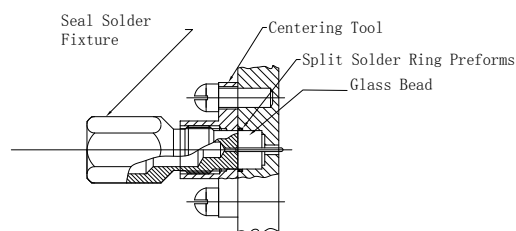

Part no.	GDF09	GDF12	GDF15	GDF18	GDF20
Centering hole depth	0.23mm/0.009"	0.30mm/0.012"	0.38mm/0.015"	0.46mm/0.018"	0.51mm/0.020"


Glass Bead Installation Tools–Thread-in Connector

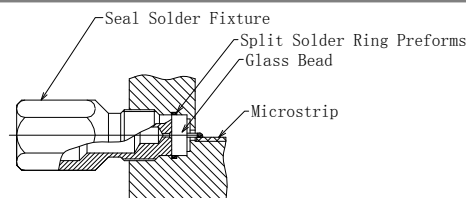

Part no.	GDY09	GDY12	GDY15	GDY18	GDY20
Centering Hole depth	0.23mm/0.009"	0.30mm/0.012"	0.38mm/0.015"	0.46mm/0.018"	0.51mm/0.020"

Thread-in Connector Installation Tools

We use special installation tool to assemble parts.

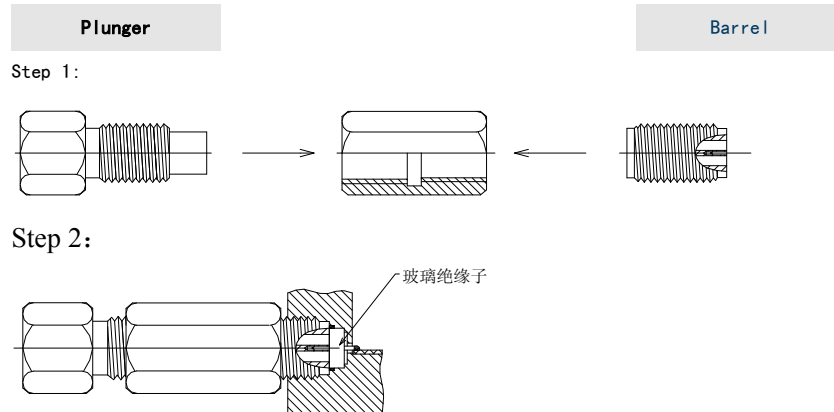

Part no. : GDG (Including Plunger and barrel)

Major Government Clients

