


CALIBRATION KIT-SHORTS

Model ST-3.5-18 50Ω DC-18GHz

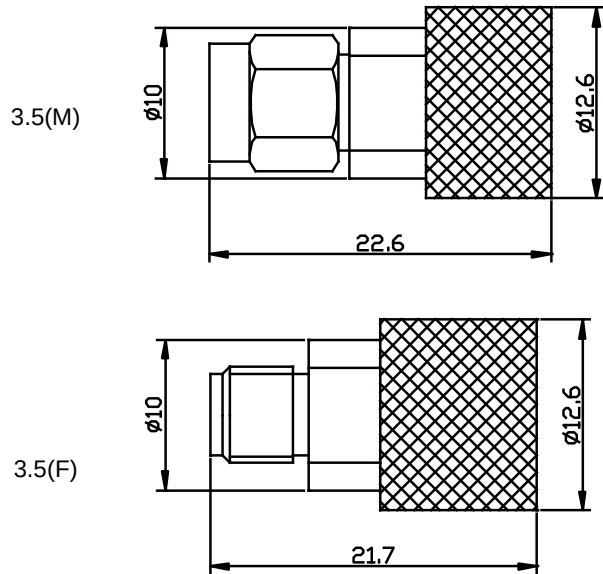

3.5mm Calibration Kit characterize the systematic errors in the measurement system by measuring known devices (standards) on the system over the certain frequency range as to improve the measure precision . Calibration kit contains a 3.5mm fixed termination and one piece 3.5mm open/short circuit. The kit is specified from DC to 18 GHz with stable electricity performance.

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Brass Gold Plated
Dimensions	3.5(M): $\varnothing 12.6 \times 22.6$ mm 3.5(F): $\varnothing 12.6 \times 21.7$ mm
Weight	3.5(M):25g 3.5(F):15g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Minimum Reflection Coefficient
ST-3.5-18	DC-18	0.99

NOMINAL IMPEDANCE: 50Ω

CONNECTOR TYPE: 3.5mm