



COAXIAL FIXED ATTENUATORS

Model 2.92ST1-40-KFKS DC-40GHz 1 Watts

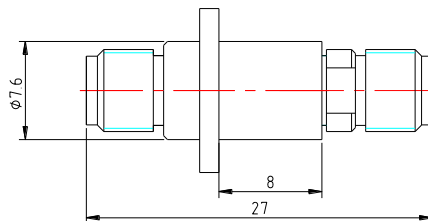

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

2.92ST1-40-KFKS coaxial fixed attenuators' average power 1W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Stainless Steel
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Stainless Steel
Temp Range	-55°C~+125°C
Dimensions	12.7×12.7×27mm
Weight	8g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)					Max VSWR
		1	2-9	10	20	30	
2.92ST1-XX-40-KFKS	DC-40	-0.5/+1.0	-0.9/+0.5	±0.5	±0.6	±0.8	1.35

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 1W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C.

PEAK POWER: 0.2KW (5μs pulse width with 1% duty cycle)

CONNECTOR TYPE: 2.92mm(F,F)