
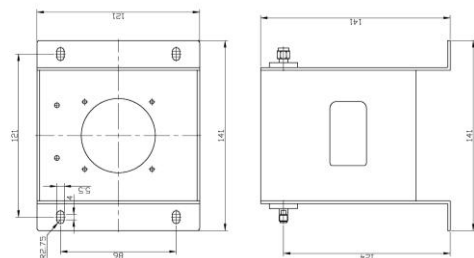


# COAXIAL FIXED ATTENUATORS

## Model 2.92ST100-26.5 DC-26.5GHz 100 Watts

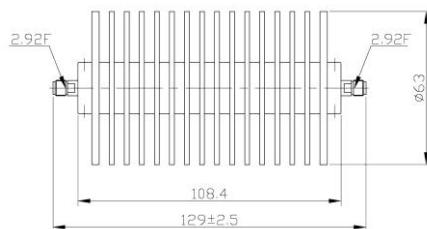

Coaxial fixed attenuators can satisfy almost any requirement where a reduction in power is needed and are used to extend the dynamic range of devices such as power meters and amplifiers, reduce signal levels to detectors and match circuits. Attenuators are also used to balance out transmission lines that otherwise would have unequal signal levels.

2.92ST100-26.5 coaxial fixed attenuators' average power 100W, frequency range from DC-26.5GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

### MECHANICAL SPECIFICATIONS

|            |                                           |
|------------|-------------------------------------------|
| Connectors | Brass Gold Plated                         |
| Male Pin   | Brass Gold Plated                         |
| Female Pin | Beryllium Copper Gold Plated              |
| Housing    | Aluminum, Black Anodize                   |
| Temp Range | -55° C ~ +125° C                          |
| Dimensions | A:Ø63×129mm<br>B:141×121×141mm(with fans) |
| Weight     | A:386g; B:910g                            |

**RoHS Compliant: Yes**

### ELECTRICAL SPECIFICATIONS

| Model Number      | Frequency Range(GHz) | Attenuation Value & Accuracy (dB) |            |           |      | Max VSWR |
|-------------------|----------------------|-----------------------------------|------------|-----------|------|----------|
|                   |                      | 10                                | 20         | 30        | 40   |          |
| 2.92ST 100-XX-18  | DC-18                | ±1.0                              | ±1.0       | ±1.0      | ±1.0 | 1.30     |
| 2.92ST100-XX-26.5 | DC-26.5              | -1.0/+3.0                         | -1.0/+3.75 | -1.0/+1.5 | ±1.0 | 1.40     |

Note: XX refer to attenuation value in dB

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 100W average to 25°C ambient temperature, derated linearly to 5W @ 125°C.

**PEAK POWER:** 0.5KW (5μs pulse width with 10%duty cycle)

**CONNECTOR TYPE:** 2.92mm(M,F)