


COAXIAL FIXED ATTENUATORS


Model 2.92ST5-40 DC-40GHz 5 Watts



1-30dB



40dB

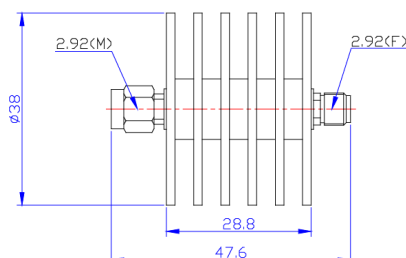

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

2.92ST5 coaxial fixed attenuators' average power 5W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Brass Gold Plated or Stainless Steel	
Male Pin	Brass Gold Plated	
Female Pin	Beryllium Copper Gold Plated	
Housing	Aluminum, Black Anodize	
Temp Range	-55°C ~ +85°C	
Dimensions	Ø38×32.6	≤20dB L=31.4
		30dB L=33
		40dB L=47.6
Weight	1-30dB:25g; 40dB:40g	

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		1-9	10-20	20-30	40	
2.92ST5-XX-32	DC-32	±0.8	±0.8	±1.0	±1.5	1.30
2.92ST5-XX-40	DC-40	±1.0	±1.0	-1.0/+1.5	1.0/+2.0	1.35 1.40(40dB)

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 5W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C.

PEAK POWER: 0.2KW (5μs pulse width with 2.5% duty cycle)

CONNECTOR TYPE: 2.92mm