


COAXIAL FIXED ATTENUATORS

Model ST-100-40 DC-40GHz 100 Watts

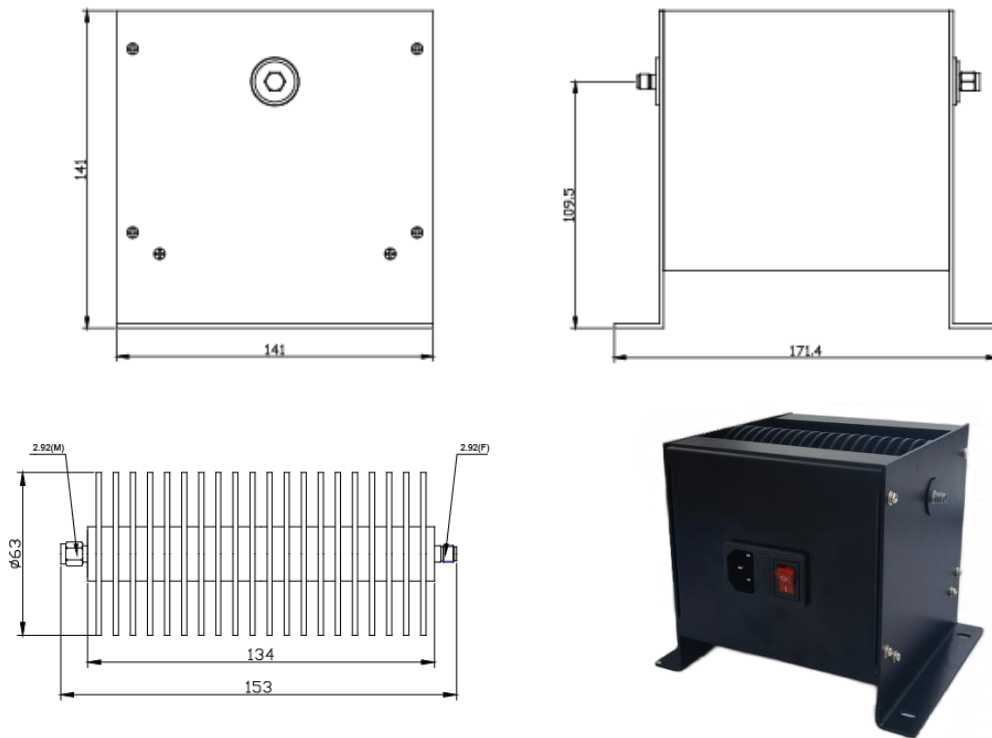

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

ST-100 coaxial fixed attenuators' average power 50W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

MECHANICAL SPECIFICATIONS

Connectors	Stainless Steel
Male Pin	Beryllium Copper Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, black Anodized
Temp Range	-55° C ~ +125° C
Dimensions	171.4×141×141mm (With cooling fan)
Weight	1.3kg

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)			Max VSWR
		20	30	40	
ST-100-40	DC-40	±5.0	±3.0	±3.0	1.60

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 100W average to 25°C ambient temperature. Air cooling must be turned on when working. It is recommended that the continuous working time should not exceed 15 minutes.

CONNECTOR TYPE: 2.92mm