


Coaxial fixed attenuator

Model ST-1000-60 DC-500MHz 1000 Watts



Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

ST serial oil-cooled coaxial attenuators' average power 1W-10KW, frequency range DC-2GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

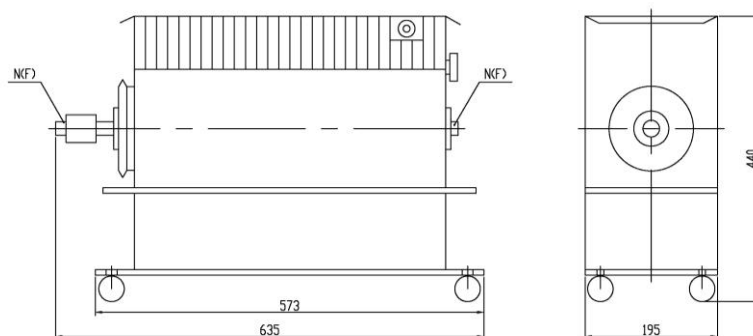

MECHANICAL SPECIFICATIONS

Connectors	Male Pin	Female Pin	Housing	Temp Range	Dimensions	Weight
Brass Nickel Plated	Brass Gold Plated	Phosphor Copper Gold Plated	Aluminum, Gray Powder Coat	-40° C ~ +45° C	640×195×440mm(with fans)	23Kg

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(MHz)	Attenuation Value & Accuracy (dB)	Max VSWR
		60	
ST1000-60	DC-500	±1.0	1.20

Note: standard attenuation value is 30dB and other values combined by 30dB+small power attenuator

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER:1000W

PEAK POWER:50KW(1ms)

COOLING METHOD: oil-cooled+ forced draft

OPERATING POSITION: Horizontal only

CONNECTOR TYPE: N(F)-N(F), 7/16(F)-N(F)