


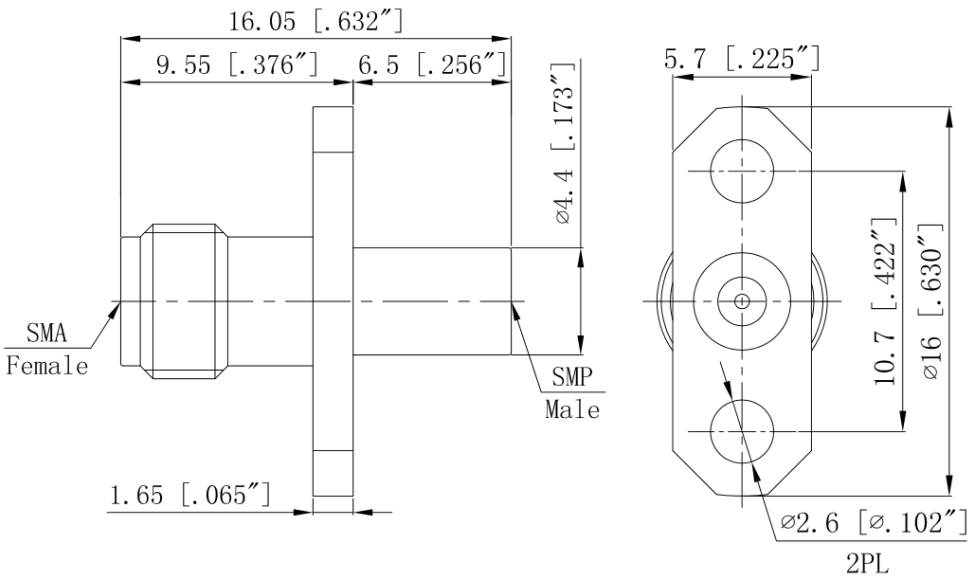

Product Datasheet

MODEL NO.	SMA/SMP-ST-F3		RF COAXIAL ADAPTER	
DESCRIPTION	SMA female to SMP male Full Detent 4 Hole Flange Adapter			
Outline Drawing			Unit (mm)	
				
Performance and Specification				
Standard and Spec.: GJB 681A-2002,GJB360B-2009				
Item	Spec.		Item	Spec.
Impedance	50Ω		Frequency	DC~26.5GHz
Insulation Resistance	≥5000MΩ		VSWR	≤1.20:1
Dielectric Withstand Voltage	500V		Durability	100 Cycles
Temperature	-55℃~+125℃		-	-
Material and Finish			Others	
	Material	Finish	Our company can customize any product as required (connector type and length). Website: rfconnector.in	
Center Contact	BeCu	Gold		
Dielectric	PEI & PTFE	-		
Body	Stainless Steel	Passivated		