
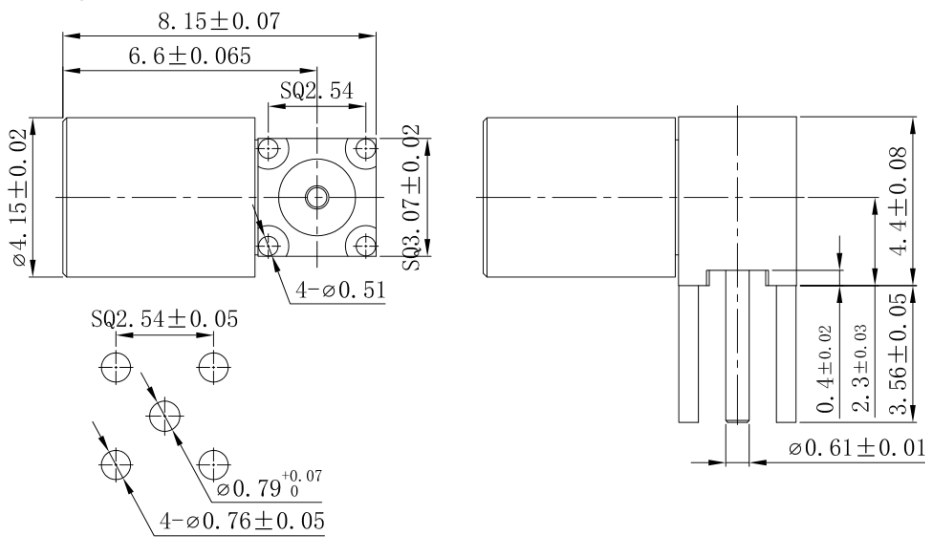


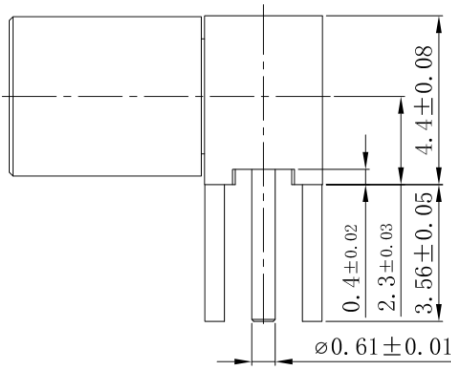

Product Datasheet

MODEL NO.	SMP-ST-HD03G		RF COAXIAL CONNECTOR	
DESCRIPTION	SMP male R/A, Limited Detent connector			
Outline Drawing		Unit (mm)		
 Mounting Hole				
Performance and Specification				
Standard and Spec.: GJB 681A-2002,GJB360B-2009				
Item	Spec.		Item	Spec.
Impedance	50Ω		Frequency	DC~12GHz
Insulation Resistance	≥5000MΩ		VSWR	≤1.25:1
Dielectric Withstand Voltage	500V		IL	≤0.02+0.1×√F(GHz)dB
Temperature	-55℃~+165℃		Durability	100 cycles
Material and Finish			Others	
	Material	Finish	Our company can customize any product as required (connector type and length). Website: rfconnector.in	
Center Contact	BeCu	Gold		
Dielectric	PTFE	-		
Body	Brass & Stainless Steel	Gold & Passivate		