

CALIBRATION KIT

Model ST-85052D26.5 DC-26.5GHz Type 3.5mm SOLT Calibration Kit



INSTRUMENT LIST

Item No.	Instrument	Model Number	Quantity
1	Open (Male)	ST-85052D26.5-KM	1
2	Open (Female)	ST-85052D26.5-Kf	1
3	Short (Male)	ST-85052D26.5-DM	1
4	Short (Female)	ST-85052D26.5-DF	1
5	Load (Male)	ST-85052D26.5-LM	1
6	Load (Female)	ST-85052D26.5-LF	1
7	Storage Box 275*200*810mm		1
Optional accessories			
1	Adaptor: 3.5(M)-3.5(M)	Optional	
2	Adaptor: 3.5(F)-3.5(F)	Optional	
3	Adaptor: 3.5(M)-3.5(F)	Optional	
4	Solid Wrench: Opening size 7mm	Optional	
5	Solid Wrench: Opening size 8mm	Optional	
6	Torque wrench: 8mm(5/16in), 0.9Nm	Optional	

SPECIFICATIONS


Instrument	Model Number	Frequency Range	Specifications
Open (Male)	ST-85052D26.5-KM	DC-26.5GHz	Phase deviation: $\leq \pm 1.5^\circ$ *
Open (Female)	ST-85052D26.5-Kf		Phase deviation: $\leq \pm 1.5^\circ$ *
Short (Male)	ST-85052D26.5-DM		Phase deviation: $\leq \pm 1.5^\circ$ *
Short (Female)	ST-85052D26.5-DF		Phase deviation: $\leq \pm 1.5^\circ$ *
Load (Male)	ST-85052D26.5-LM		VSWR: ≤ 1.04
Load (Female)	ST-85052D26.5-LF		VSWR: ≤ 1.04

CALIBRATION KIT

SURFACE TREATMENT


Instrument	Inner Conductor	Outer Conductor
Open	Beryllium bronze, gold-plated	Beryllium bronze, gold-plated
Short	Beryllium bronze, gold-plated	Beryllium bronze, gold-plated
Load	Beryllium bronze, gold-plated	Beryllium bronze, gold-plated

OUTDRAWING:

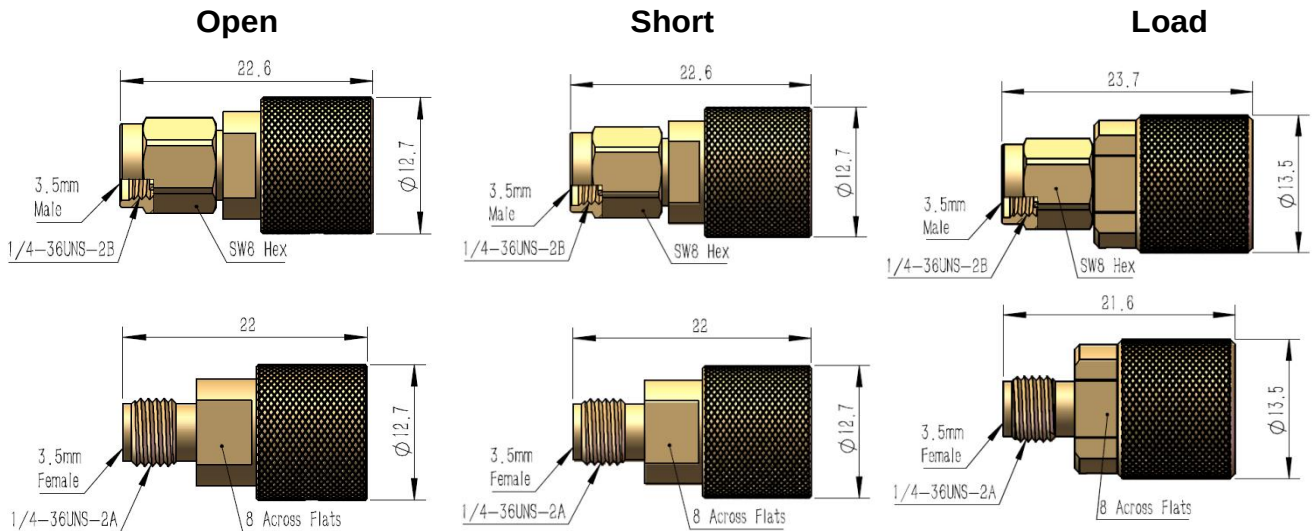


INTERFACE STANDARD:

3.5mm Male

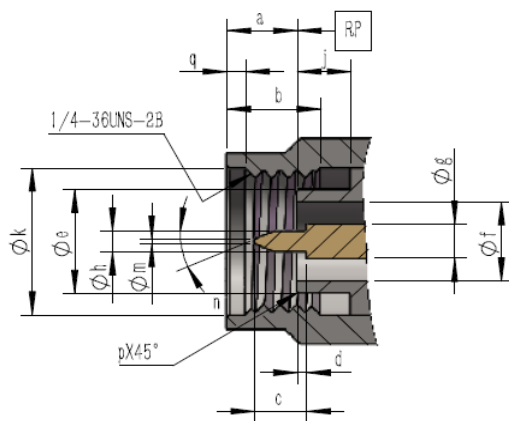

3.5mm Female

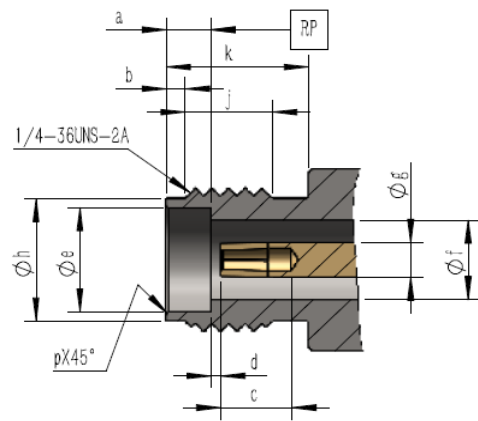

	mm		in	
	Min.	Max.	Min.	Max.
a	2.36	3.56	0.093	0.135
b	3.43	4.01	0.135	0.158
c	2.03	2.29	0.080	0.090
d	0.000	0.030	0.000	0.0012
e	4.547	4.577	0.1790	0.1802
f	3.493	3.508	0.1375	0.1381
g	1.514	1.524	0.0596	0.0600
h	0.919	0.935	0.0362	0.0368
j	2.29	2.49	0.090	0.098
k	6.38	6.73	0.251	0.265
m	0.15	0.38	0.006	0.015
n	27°	33°	27°	33°
p	0.03	0.13	0.001	0.005
q	0.38	1.14	0.015	0.045


	mm		in	
	Min.	Max.	Min.	Max.
a	1.88	1.98	0.074	0.078
b	0.38	1.14	0.015	0.045
c	2.79	3.18	0.110	0.125
d	0.000	0.030	0.000	0.0012
e	4.597	4.628	0.1810	0.1822
f	3.493	3.508	0.1375	0.1381
g	1.514	1.524	0.0596	0.0600
h	5.28	5.46	0.208	0.215
j	3.35	4.62	0.132	0.182
k	5.54	---	0.218	---
p	0.05	0.25	0.002	0.010

CALIBRATION KIT


ADAPTOR:

Instrument	Frequency Range	Impedance	VSWR	Cycle Life	Temp Range
3.5(M)-3.5(M)	DC-26.5GHz	50Ω	≤1.08	> 2000 times	-55~+85℃
3.5(F)-3.5(F)			≤1.08		
3.5(M)-3.5(F)			≤1.08		
Material and Surface Treatment					
Outer Conductor		Inner Conductor		Insulator	Threaded sleeve
Stainless steel SUS303 passivated		Beryllium bronze gold-plated		PEEK	Stainless steel SUS303 passivated



3.5mm (m) to 3.5mm (m)

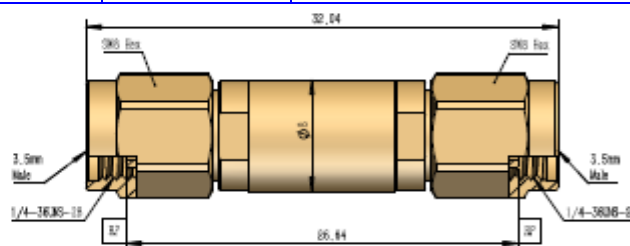

3.5mm (f) to 3.5mm (f)

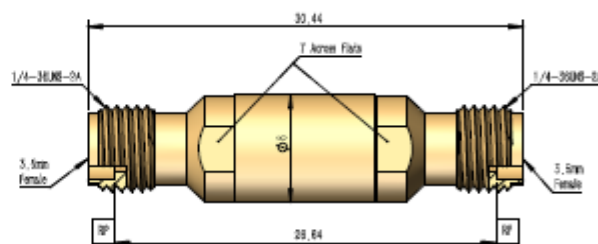

3.5mm (m) to 3.5mm (f)

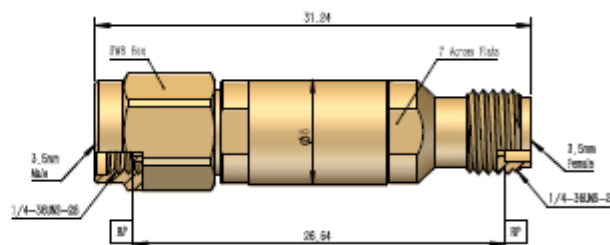

Solid Wrench



Aluminum alloy anodizing

Torque wrench:



Opening size: 8mm (5/16 inch)

Torque setting: 0.9Nm (8 inch-lbs)

Wrench handle: Aluminum, anodized

Wrench head: Tool steel, nickel plated



CALIBRATION KIT

CALIBRATION PARAMETERS:

OPEN		Male	Female
Z0		50Ω	50Ω
Fringing Capacitances	C0 F(e-15)	49.433	49.433
	C1 F(e-27)/Hz	-310.13	-310.13
	C2 F(e-36)/Hz ²	23.168	23.168
	C3 F(e-45)/Hz ³	-0.15966	-0.15966
Offset Delay (ps)		29.243	29.243
Offset length (mm)		8.767	8.767
Offset Loss	Gohm/Sec	2.2	0.93
	dB/(GHz ^{1/2})	0.0112	0.0037
	dB/mm@1GHz	6.4e-4	2.7e-4

SHORT		Male	Female
Z0		50Ω	50Ω
Short Inductance	L0 H(e-12)	2.0765	-0.1315
	L1 H(e-24)/Hz	-108.54	606.2089
	L2 H(e-33)/Hz ²	2.1705	-68.405
	L3 H(e-42)/Hz ³	-0.01	2.0206
Offset Delay (ps)		31.785	31.785
Offset length (mm)		9.529	9.529
Offset Loss	Gohm/Sec	2.36	1.13651
	dB/(GHz ^{1/2})	0.0130	0.0055
	dB/mm@1GHz	6.8e-4	3.3e-4

LOAD	
Z0	50Ω
Offset Delay	0ps
Offset length	0mm
Offset Loss	0ohm/Sec 0dB/(GHz ^{1/2}) 0dB/mm

LOAD	
Z0	50Ω
Connector Port1	3.5mm female
Connector Port2	3.5mm male
Offset Delay	0ps
Offset length	0mm
Offset Loss	0ohm/Sec 0dB/(GHz ^{1/2}) 0dB/mm