


COAXIAL FIXED ATTENUATORS

Model ST-10000-B DC-1GHz 10000 Watts

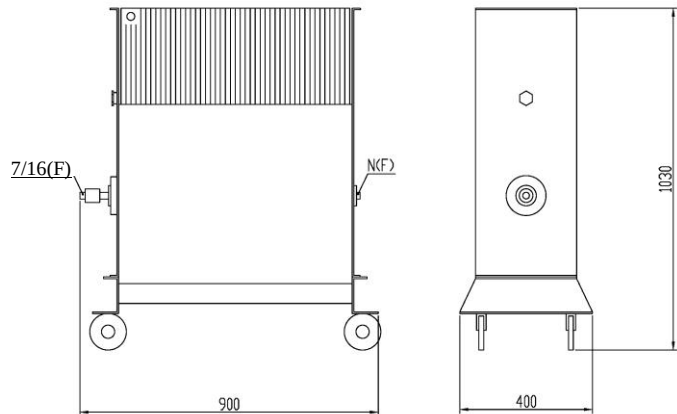

Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

ST serial oil-cooled coaxial attenuators' average power 1W-10KW, frequency range DC-2GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Phosphor Copper Gold Plated
Housing	Aluminum, Gray Powder Coat
Temp Range	-40°C~+45°C
Dimensions	900×400×1030mm
Weight	133Kg

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(MHz)	Attenuation Value & Accuracy (dB)			Max VSWR
		30	40	50	
ST10000-XX-1-B	DC-30	±0.5	±0.5	±0.5	1.10
	DC-88	±0.5	±0.5	±0.5	1.15
	DC-500	±1.0	±1.0	±1.0	1.25
	DC-1000	Attenuation Curve Available			1.45

Note: XX refer to attenuation value in dB, standard attenuation value is 30dB and other values combined by 30dB+small power attenuator

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER:10000W

PEAK POWER:100KW(10μs)

COOLING METHOD: oil-cooled+ forced draft

OPERATING POSITION: Horizontal only

CONNECTOR TYPE: 7/16(F)-N(F), LC(F)-N(F), IF70-N(F), IF110-N(F)