


## Coaxial Switches

**Model ST801-XX-X-F-X-1-XX-D2-XX-XX-6080**

**SP3T~8T, Failsafe, SMA type, TTL optional, Termination optional**

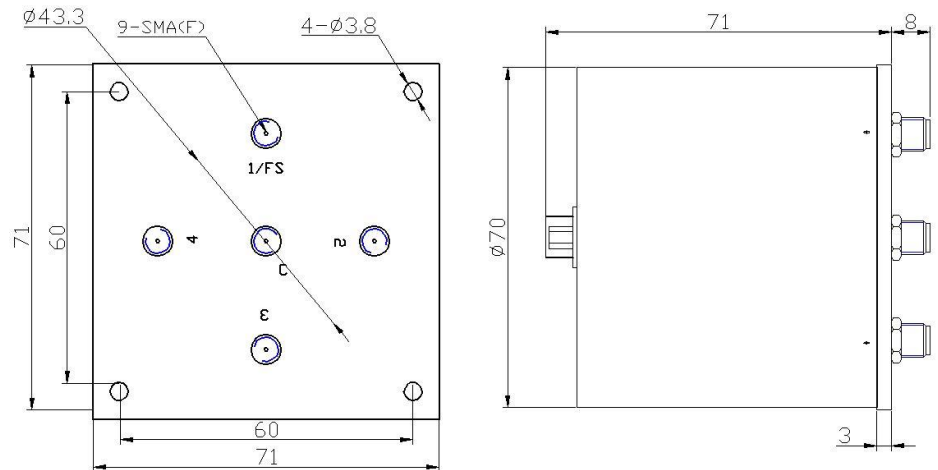

ST801-0X-F-6080 series coaxial switches are suitable for switching between multi-port signals, It's SP3T through SP8T, Normally closed ends can be selected, The TTL control mode is adopted. It is widely used in all kinds of testing systems and signal control equipment. The switch has the characteristics of stable performance ,low insertion loss, high isolation, high repeatability and so on. It is reliable product.

### MECHANICAL SPECIFICATIONS

|                       |                                                                    |
|-----------------------|--------------------------------------------------------------------|
| Connectors            | Stainless steel                                                    |
| Female Pin            | Beryllium Copper Gold Plated                                       |
| Housing               | Aluminum Conformal Coating                                         |
| Operating Temperature | -20° C ~ +65° C ( normal )<br>-40° C ~ +85° C ( wide temperature ) |
| Dimensions            | 71x71x79mm                                                         |
| Weight                | 300g( without termination)<br>400g( with terminations)             |

**RoHS Compliant: Yes**

### ELECTRICAL SPECIFICATIONS

| Frequency (GHz) | VSWR(max) | Insertion Loss (dB) | Isolation ( dB) | Handling Power |            |
|-----------------|-----------|---------------------|-----------------|----------------|------------|
|                 |           |                     |                 | Normal         | High Power |
| DC~2            | 1.20      | 0.20                | 90              | 60             | 200        |
| 2~4             | 1.25      | 0.25                | 80              | 50             | 150        |
| 4~8             | 1.30      | 0.30                | 75              | 40             | 100        |
| 8~12            | 1.40      | 0.40                | 70              | 30             | 80         |
| 12~18           | 1.60      | 0.60                | 60              | 20             | 50         |

**Impedance:** 50Ω

**Mechanical Life:** 10<sup>6</sup> circles

**Switching Speed:** <20ms

**Connector Type:** SMA(F)

**Termination Power:** 1W optional