


Coaxial Switches

Model ST-801-01-X-X-L-1-XX-2T-XX-5355

SPDT, Latching, SMA type, TTL optional, with Termination

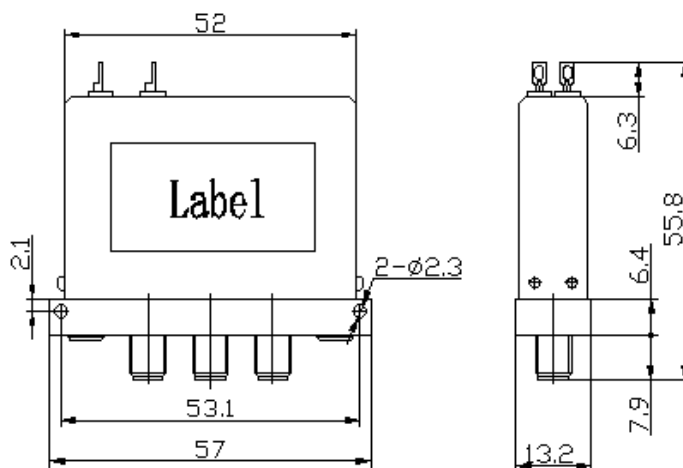

ST-801-01-5355 series coaxial switches are suitable for switching between multi-port signals, SPDT, SMA connected, with 2 terminations and failsafe or latching coaxial switch. It is widely used in all kinds of testing systems and signal control equipment. The switch has the characteristics of stable performance, low insertion loss, high isolation, high repeatability and so on. It is a reliable product.

MECHANICAL SPECIFICATIONS

Connectors	Stainless steel
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum Conformal Coating
Operating Temperature	-20° C ~ +65° C (normal) -40° C ~ +85° C (wide temperature)
Dimensions	57x13.2x55.8mm
Weight	64g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Impedance: 50Ω

Frequency (GHz)	VSWR(max)	Ins.Loss (dB)	Isolation (dB)	Handling Power	
				Normal	High Power
DC~2	1.15	0.20	90	60	200
2~4	1.20	0.20	80	50	150
4~8	1.30	0.25	75	40	100
8~12	1.4	0.35	65	30	80
12~18	1.5	0.40	60	20	50
18~26.5	1.6	0.60	55	10	35

Mechanical Life: 10⁶ circles

Switching Speed: <20ms

Connector Type: SMA(F)

Termination Power: 1W