



STANDARD TERMINATION

Model ST-3.5-26.5 50Ω DC-26.5GHz



3.5(M)

3.5(F)

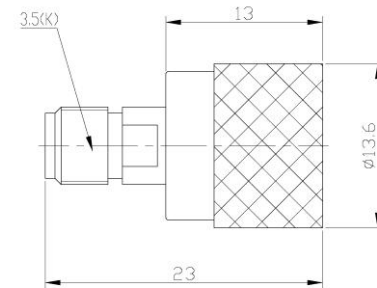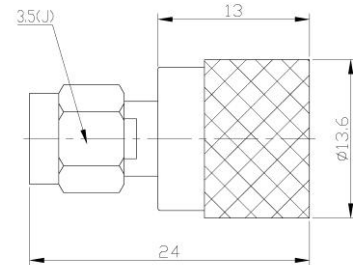

Type 3.5 Calibration Kit characterize the systematic errors in the measurement system by measuring known devices (standards) on the system over the certain frequency range as to improve the measure precision . Calibration kit contains a Type 3.5 fixed termination and one piece Type 3.5 open/short circuit. The kit is specified from DC to 26.5 GHz with stable electricity performance.

MECHANICAL SPECIFICATIONS

Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Brass Nickel Plated
Dimensions	3.5(M): Ø13.6×24mm 3.5(F): Ø13.6×23mm 26.5GHz Ø13×23mm
Weight	3.5(M):15g 3.5(F):13g 26.5GHz :13g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Max VSWR
ST-3.5-8	DC-8	≤1.06
ST-3.5-18	DC-18	≤1.10
ST-3.5-26.5	DC-26.5	≤1.10(M) ≤1.14(F)

NOMINAL IMPEDANCE: 50Ω

CONNECTOR TYPE: 3.5mm