



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature:CONNECTORS MAC PLUG 2.9STR



Page No.

1 of 1

STK-571121791370

CONNECTORS MAC PLUG 2.9STR

OUTLINE DRAWING

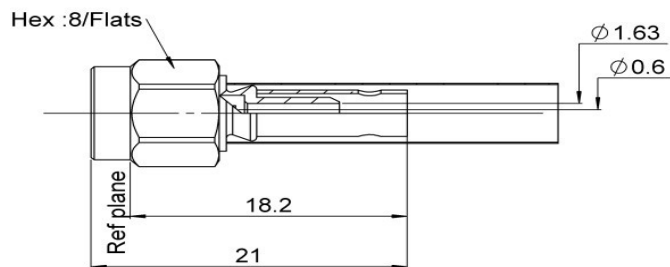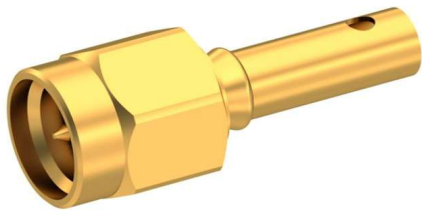

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12.4 GHz
VSWR	$1.15 + 0.0200 \times F(\text{GHz})$ Maxi
Insertion loss	0.06 $\square F(\text{GHz})$ dB Max
RF leakage	-(60 - F(GHz)) dB Max
Voltage rating	250 Veff Maxi
Dielectric withstanding voltage	750 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	65°C ~ 165°C
-----------------------	--------------

MECHANICAL INFORMATION

Opposite end	27 N mini
Mating	100 N mini
Mating life	500 Cycles mini
Weight	2,8910 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		STAINLESS STEEL.			GOLD 0.2 OVER NICKEL 2		
CENTER CONTACT		BRASS			GOLD 1.3 OVER NICKEL 2		
OUTER CONTACT		-			-		
INSULATOR		PTFE			-		
GASKET		SILICONE RUBBER			-		
OTHERS PARTS		STAINLESS STEEL.			GOLD 0.5 OVER NICKEL 2		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in