



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON MMCX RP ST F PCB..


Page No.

1 of 1

STK-571126331261

CON MMCX RP ST F PCB..

OUTLINE DRAWING

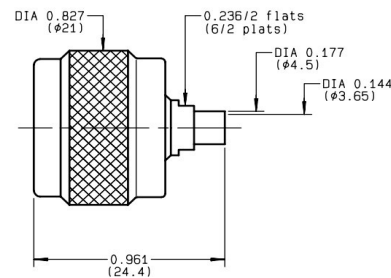

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	0-11 GHz
VSWR	1.15 + Xf (GHz) Maxi
Insertion Loss	0.048 $\sqrt{f}$ (GHz) db Maxi
Dielectric Withstanding Voltage	1000 Veff Mini
Insulation Resistance	5000 M Ω Mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55 °C to +105 °C
-----------------------	-------------------

MECHANICAL INFORMATION

Durability	500 Cycles
Weight	24.86gr

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		BRASS		GOLD 0.2 OVER NICKEL 2			
CENTER CONTACT		BRASS		GOLD 0.2 OVER NICKEL 2			
DIELECTRIC		PTFE		-			
OTHERS PIECES		BRASS		BBR 2			
GASKET		SILICON RUBBER		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in