



www.rfconnector.in



Page No.


1 of 1

Nomenclature: CON CO-AXIAL 50 OHMS (FOR LMR-300 CABLE)

STK-571126931303

CON CO-AXIAL 50 OHMS (FOR LMR-300 CABLE)

OUTLINE DRAWING

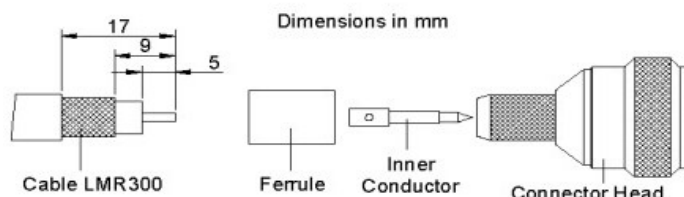

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-6 GHz
VSWR	$\leq 1.30 : 1$
Insertion loss	Low, cable-dependent
Dielectric withstanding voltage	≥ 1000 V RMS

ENVIRONMENTAL INFORMATION

Operation temperature	-40 °C to +85 °C
-----------------------	------------------

MECHANICAL INFORMATION

Termination Method	Crimp (Ferrule)
Cable Preparation Length	17 mm (overall)
Mating Cycles	≥ 500 cycles (typical)

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING				
BODY		BODY		NICKEL,SILVER,GOLD				
CENTER CONTACT		BRASS,BRONZE		GOLD				
INSULATOR		PTFE						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in