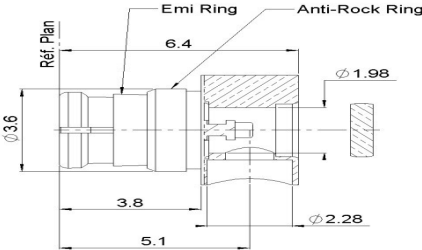


 Technical Data	STK SERIES CONNECTOR		 www.rfconnector.in					
Nomenclature:FEMALE RIGHT ANGLE PLUG SOLDER TYPE				Page No. 1 of 1				
STK-571127341322		FEMALE RIGHT ANGLE PLUG SOLDER TYPE						
OUTLINE DRAWING								
								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance		50 Ω						
Frequency		0-26.5 GHz						
VSWR		1.35 + 0 x F(GHz) Maxi						
Insertion loss		0.12 √F(GHz) dB Maxi						
RF leakage		-(- F(GHz)) dB mini						
Voltage rating		335 Veff Maxi						
Dielectric withstanding voltage		500 Veff mini						
Insulation resistance		5000 MΩ mini						
ENVIRONMENTAL INFORMATION								
Operation temperature		-65/+165 ° C						
MECHANICAL INFORMATION								
Mating End		6.7 N mini						
Opposite end		6.7 N mini						
Torque		NA N.cm mini						
Mating life		100 Cycles mini						
Weight		0.4530 g						
MATERIAL INFORMATION								
COMPONENTS		MATERIALS		PLATINGS (mm)				
Body		BERYLLIUM COPPER		GOLD OVER NICKEL				
Center contact		BERYLLIUM COPPER		GOLD OVER NICKEL				
Insulator		PEEK		-				
Gasket		-		-				
Others parts		BERYLLIUM COPPER		GOLD OVER NICKEL				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								