





www.rfconnector.in



Page No.
1 of 1

FEMALE STRAIGHT PLUG SOLDER TYPE

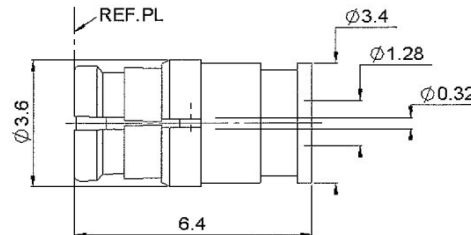

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40 GHz
VSWR	1.35 + 0 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
RF leakage	- (- F(GHz)) dB mini
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	NA N mini
Opposite end	NA N mini
Torque	NA N.cm mini
Mating life	100 Cycles mini
Weight	0.29 g

COMPONENTS	MATERIALS	PLATINGS (mm)
Body	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
Center contact	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
Insulator	PEEK	-
Gasket	-	-
Others parts	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.