



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF50 SN ST BULK HD JACK FULL CRMP.



Page No.

1 of 1

STK-571128471372

CONN RF50 SN ST BULK HD JACK FULL CRMP.

OUTLINE DRAWING

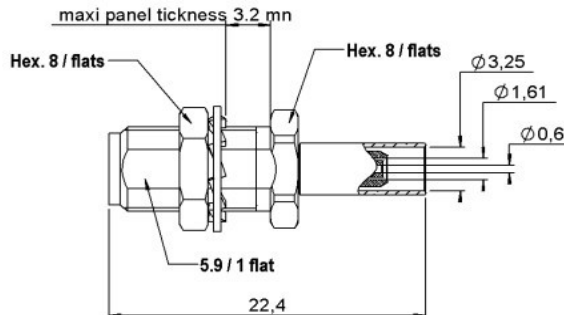

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12.4* GHz
VSWR	1.15 + 0,0200 x F(GHz) Maxi
Insertion loss	0.04 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	NA
Voltage rating	250 Veff Maxi
Dielectric withstanding voltage	750 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating end	18 N mini
Opposite end	18 N mini
Panel nut	150 N.cm
Mating life	500 Cycles mini
Weight	3,6000 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS		PLATINGS (mm)			
BODY		STAINLESS STEEL		GOLD 0.5 OVER NICKEL 2			
CENTER CONTACT		BERYLLIUM COPPER		GOLD 1.3 OVER NICKEL 2			
INSULATOR		PTFE		-			
OTHERS PARTS		BRASS		GOLD 0.2 OVER NICKEL 2			
OUTER CONTACT		NA		NA			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in