



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: FEMALE RIGHT ANGLE PLUG , SOLDER TYPE CABLE .085


Page No.

1 of 1

STK-571132581262

FEMALE RIGHT ANGLE PLUG , SOLDER TYPE CABLE .085

OUTLINE DRAWING

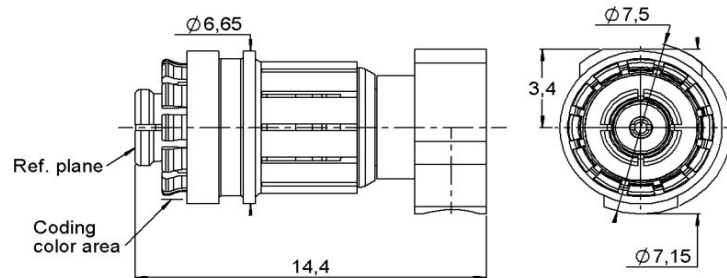

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-26.5 GHz
VSWR	1.3 + 0,0050 x F(GHz) Maxi
Insertion loss	0.12 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (90 - F(GHz)) dB Max
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55/+125 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	6.7 N mini
Opposite end	6.7 N mini
Mating life	500 Cycles mini
Weight	2,2200 g

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BERYLLIUM COPPER	N2PGR
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
INSULATOR	PTFE+PEEK	-
OTHERS PARTS	BERYLLIUM COPPER	NICKEL 2
GASKET	LOADED SILICONE RUBBER	

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in