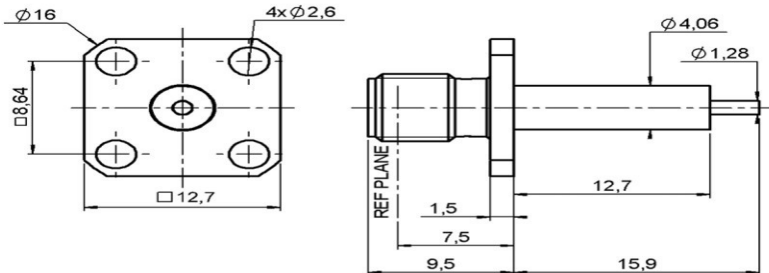


 Technical Data	STK SERIES CABLE	 www.rfconnector.in						
Nomenclature:CONN RF50 SMA RCPT ST F FLNG MT.			Page No. 1 of 1					
STK-571152851255	CONN RF50 SMA RCPT ST F FLNG MT.							
OUTLINE DRAWING								
								
TECHNICAL DATA								
ELECTRICAL DATA								
Impedance	50 Ω							
Frequency	0-24.5 GHz							
VSWR	1.06 + 0,0025 x F(GHz) Maxi							
Insertion loss	.07* √F(GHz) dB Maxi							
RF leakage	- (NA - F(GHz)) dB Maxi							
Voltage rating	500 Veff Maxi							
Dielectric withstanding voltage	1000 Veff mini							
Insulation resistance	5000 MΩ mini							
MATERIAL INFORMATION								
COMPONENTS	MATERIALS	PLATINGS (mm)						
Body	Stainless steel	Gold 0.5 over nickel 2						
Center contact	Beryllium copper	Gold 1.3 over nickel 2						
Insulator	PTFE	-						
ENVIRONMENTAL INFORMATION								
Operating	-65 °C ... 105 °C							
MECHANICAL INFORMATION								
Axial force – Mating end		27 N mini						
Axial force – Opposite end		27 N mini						
Torque		2.8 N.cm mini						
Mating life		500 Cycles mini						
Weight		3,0340 g						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division Email: sales.blr@rfconnector.in
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.								
www.rfconnector.in								