



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN RF SMB RT ANGLE RG196A/U


Page No.

1 of 1

STK-571182201224

CONN RF SMB RT ANGLE RG196A/U

OUTLINE DRAWING

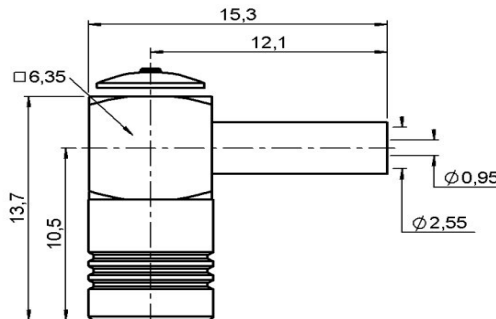

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-4 GHz
VSWR	$1.45 + 0.040 \times F(\text{GHz})$ Maxi
Insertion loss	$0.5 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (57 - F(GHz)) dB Maxi
Voltage rating	250 Veff Maxi
Dielectric withstanding voltage	750 Veff mini
Insulation resistance	1000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating end	10 N mini
Opposite end	10 N mini
Torque	NA
Mating life	500 Cycles mini
Weight	2.900 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		BRASS			GOLD 0.2 OVER NICKEL 2		
CENTER CONTACT		BERYLLIUM COPPER			GOLD 1.3 OVER NICKEL2		
INSULATOR		PTFE			-		
OTHERS PARTS		BRASS			-		
OUTER CONTACT		BRASS			GOLD 0.2 OVER NICKEL 2		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in