



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN.RF 50 N PL ST M RG142


Page No.

1 of 1

STK-571182381256

CONN.RF 50 N PL ST M RG142

OUTLINE DRAWING

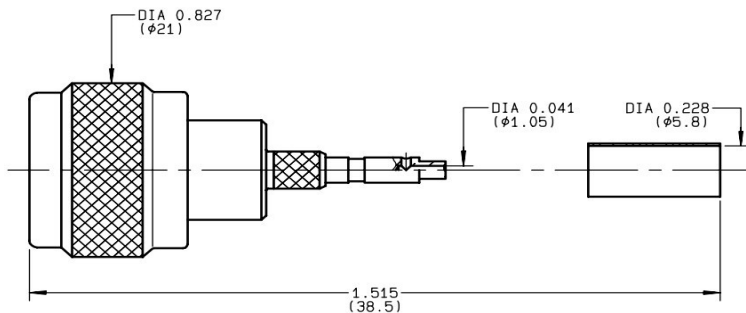

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 GHz
VSWR	1.30+ x F(GHz) Maxi
Insertion loss	0.048 √F(GHz) dB Maxi
Voltage rating	850 Veff Maxi
Dielectric withstanding voltage	1500 Veff mini
Insulation resistance	5000 MQ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55/+155 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating end	27 N Mini
Opposite end	27 N Mini
Torque	NA
Mating Durability	500 Cycles mini
Weight	27.3 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		BRASS			BBR-2		
CENTER CONTACT		BRASS			BBR-2		
INSULATOR		PTFE			-		
OTHERS PARTS		BRASS			BBR-2		
GASKET		SILICON RUBBER			-		
OUTER CONTACT		BRASS			BBR-2		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in