



www.rfconnector.in



Nomenclature: CONN. RF PLUG SMA F PANEL SEALED


Page No.

1 of 1

STK-571182641216

CONN. RF PLUG SMA F PANEL SEALED

OUTLINE DRAWING

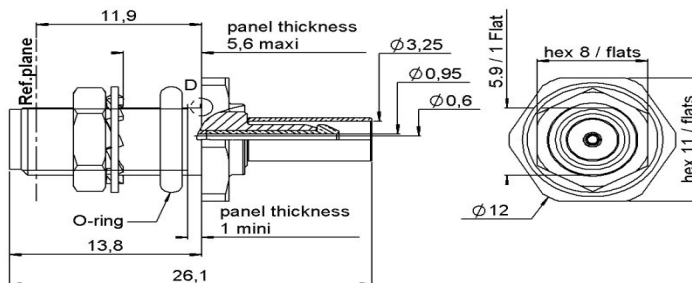

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12.4 GHz
VSWR	1.15 + 0,0600 x F(GHz) Maxi
Insertion loss	0.1 √F(GHz) dB Max
RF leakage	- (*40 - F(GHz)) dB Maxi
Voltage rating	170 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+105 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	27 N mini
Opposite end	27 N mini
Panel nut	150 N.cm
Mating life	500 Cycles mini
Weight	4.2700 q

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
BODY		STAINLESS STEEL			GOLD OVER NICKEL		
CENTER CONTACT		BERYLLIUM COPPER			GOLD OVER COPPER		
INSULATOR		PTFE					
OTHERS PARTS		STAINLESS STEEL			GOLD OVER NICKEL		
GASKET		SILICONE RUBBER			-		
OUTER CONTACT		-			-		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
				Email: sales.blr@rfconnector.in			

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.