



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: SMP MALE FD SMP MALE SB CATCHER MITT ADAPTOR


Page No.

1 of 1

STK-571627081248

SMP MALE FD SMP MALE SB CATCHER MITT ADAPTOR

OUTLINE DRAWING

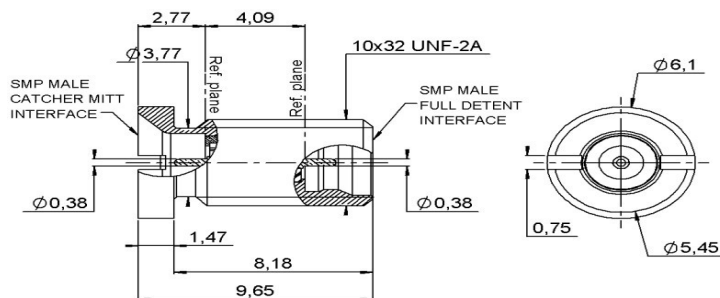

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-40* GHz
VSWR	* + 0.0000 x F(GHz) Maxi
Insertion loss	0.12 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (N/A - F(GHz)) dB Max
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 °C
-----------------------	-------------

MECHANICAL INFORMATION

Mating End	3 N mini
Opposite end	6.68 N mini
Panel nut	60 N.cm
Mating life	0 Cycles mini
Weight	0,7100 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)			
BODY		STAINLESS STEEL			PASSIVATED			
CENTER CONTACT		BERYLLIUM COPPER			GOLD NICKEL			
INSUATOR		PTFE			-			
OTHER PARTS		BRASS			GOLD OVER NICKEL			
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and all it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in