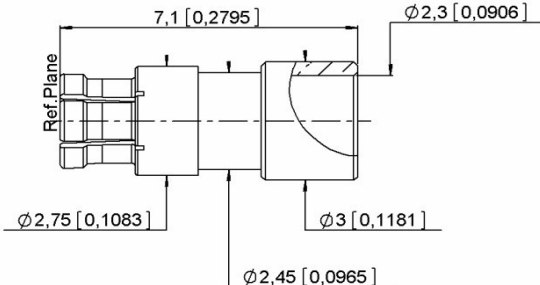


 Technical Data	STK SERIES CONNECTOR		 www.rfconnector.in				
Nomenclature:STRAIGHT FEMALE CONNECTOR				Page No. 1 of 1			
STK-571654051322		STRAIGHT FEMALE CONNECTOR					
OUTLINE DRAWING							
							
TECHNICAL DATA							
ELECTRICAL DATA							
Impedance	50 Ω						
Frequency	0-40 GHz						
VSWR	1.35 + 0,0000 x F(GHz) Maxi						
Insertion loss	0.12 √F(GHz) dB Maxi						
RF leakage	- (NA - F(GHz)) dB Maxi						
Voltage rating	335 Veff Maxi						
Dielectric withstanding voltage	500 Veff mini						
Insulation resistance	5000 MΩ mini						
ENVIRONMENTAL INFORMATION							
Operation temperature	-40/+125 ° C						
MECHANICAL INFORMATION							
Mating End	67 N mini						
Opposite end	67 N mini						
Mating life	500 Cycles mini						
Weight	0,1700 g						
MATERIAL INFORMATION							
COMPONENTS		MATERIALS		PLATINGS (mm)			
Body		BERYLLIUM COPPER		GOLD 1.3 OVER NICKEL2			
Center contact		BERYLLIUM COPPER		GOLD 1.3 OVER NICKEL2			
Insulator		PEEK		-			
Gasket		-		-			
Others parts		-		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-