






www.rfconnector.in



Page No.
1 of 1

RIGHT ANGLE FEMALE CONNECTOR

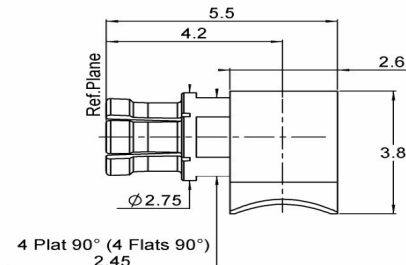

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-18 GHz
VSWR	1.3 + 0,0000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi D17
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

Operation temperature	-40/+125 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	67 N mini
Opposite end	67 N mini
Mating life	500 Cycles mini
Weight	0,1800 g

COMPONENTS		MATERIALS			PLATINGS (mm)			
Body		BERYLLIUM COPPER			GOLD 1.3 OVER NICKEL2			
Center contact		BERYLLIUM COPPER			GOLD 1.3 OVER NICKEL2			
Insulator		PEEK			-			
Gasket		-			-			
Others parts		BRASS			GOLD 1.3 OVER NICKEL2			
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in