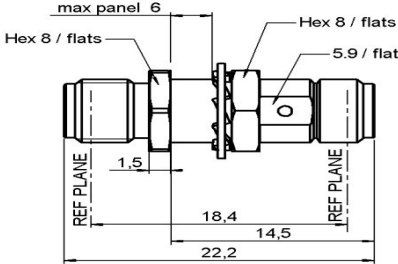


 Technical Data	STK SERIES CONNECTOR				 www.rfconnector.in					
Nomenclature:CON RF50 AD SMA/F-F RP ST JMt						Page No.				
						1 of 1				
STK-571672611302			CON RF50 AD SMA/F-F RP ST JMt							
OUTLINE DRAWING										
										
TECHNICAL DATA										
ELECTRICAL DATA										
Impedance		50 Ω								
Frequency		0-18 GHz								
VSWR		1.05 + 0.005 x F(GHz) Maxi								
Insertion loss		0.07 √F(GHz) dB Maxi								
RF leakage		- (60 - F(GHz)) dB Maxi								
Voltage rating		500 Veff Maxi								
Dielectric withstanding voltage		1000 Veff mini								
Insulation resistance		5000 MΩ mini								
ENVIRONMENTAL INFORMATION										
Operation temperature		-65/+165 ° C								
MECHANICAL INFORMATION										
Mating End		27 N mini								
Opposite end		27 N mini								
Torque		2.8 N.cm mini								
Mating life		500 Cycles mini								
Weight		3.838 g								
MATERIAL INFORMATION										
COMPONENTS		MATERIALS				PLATINGS (mm)				
Body		STAINLESS STEEL				PASSIVATED				
Center contact		BERYLLIUM COPPER				GOLD 1.3 OVER NICKEL 2				
Insulator		PTFE				-				
Gasket		-				-				
Others parts		BRASS				NICKEL-2				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division		
Sang	01.12.25	Krishnamurthy	-	0	-	-	-			
Synergy Telecom P Ltd,				-	-	-	-			
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in		
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.										
www.rfconnector.in										