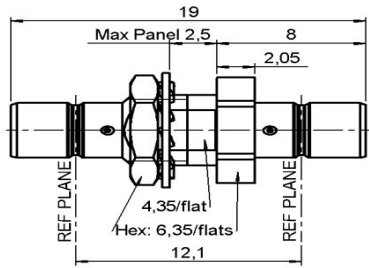


 Technical Data	STK SERIES CONNECTOR		 www.rfconnector.in				
Nomenclature:CON RF50 AD SMB/M-M RP JMt				Page No. 1 of 1			
STK-571673211247		CON RF50 AD SMB/M-M RP JMt					
OUTLINE DRAWING							
							
TECHNICAL DATA							
ELECTRICAL DATA							
Impedance	50 Ω						
Frequency	0-4 GHz						
VSWR	1.08 + 0.020 x F(GHz) Maxi						
Insertion loss	0.25 √F(GHz) dB Maxi						
RF leakage	- (57 - F(GHz)) dB Maxi						
Voltage rating	500 Veff Maxi						
Dielectric withstanding voltage	1000 Veff mini						
Insulation resistance	1000 MΩ mini						
ENVIRONMENTAL INFORMATION							
Operation temperature	-65/+165 ° C						
MECHANICAL INFORMATION							
Mating End	10 N mini						
Opposite end	10 N mini						
Panel nut	60 N.cm mini						
Mating life	500 Cycles mini						
Weight	1.880 g						
MATERIAL INFORMATION							
COMPONENTS		MATERIALS		PLATINGS (mm)			
Body		BRASS		GOLD 0.2 OVER NICKEL 2			
Center contact		BRASS		GOLD 1.3 OVER NICKEL 2			
Insulator		PTFE		-			
Gasket		-		-			
Others parts		BRASS		GOLD 0.2 OVER NICKEL 2			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-
Email: sales.blr@rfconnector.in							
This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.							
www.rfconnector.in							