




www.rfconnector.in



1 of 1

STK-571682241268

OUTLINE DRAWING

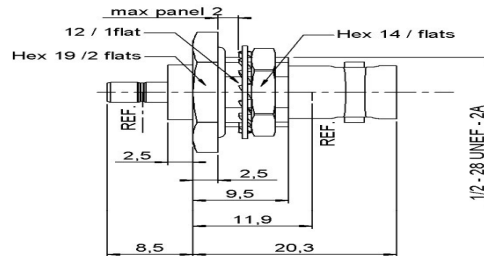

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-4 GHz
VSWR	1.20 + 0,0000 x F(GHz) Maxi
Insertion loss	0.250 √F(GHz) dB Maxi
RF leakage	- (57 - F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	1000 MΩ mini

Operation temperature	-65/+155 ° C
-----------------------	--------------

MECHANICAL INFORMATION

MECHANICAL INFORMATION

Mating End	10 N mini
Opposite end	10 N mini
Panel nut	320 N.cm mini
Mating life	500 Cycles mini
Weight	16,1300 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)			
Body		BRASS			NICKEL-2			
Center contact		BERYLLIUM COPPER			GOLD 1.3 OVER NICKEL 2			
Insulator		PTFE			-			
Gasket		SILICONE RUBBER			-			
Others parts		BRASS			NICKEL-2			
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.