Technical Data

STK SERIES CONNECTOR

www.rfconnector.in

QUALITY PRODUCT of INDIA

Nomenclature:CONNECTOR ACCE BNCRP WIREROPE RoHS IND

STK-571911211320	CONNECTOR ACCE BNCRP WIREROPE RoHS IND

OUTLINE DRAWING

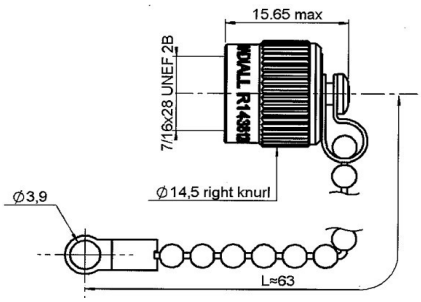

TECHNICAL DATA

ELECTRICAL DATA

Impedance	NA Ω
Frequency	NA GHz
Insertion loss	NA √F(GHz) dB Maxi
RF leakage	-(NA- F(GHz)) dB Maxi
Voltage rating	NA Veff Maxi
Insulation resistance	NA MO mini
VSWR	NA + 0,0000 x F(GHz) Maxi
Dielectric withstanding voltage	NA Veff mini

INVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C

MECHANICAL INFORMATION

Mating end	NA N mini
Opposite end	NA N mini
Torque	NA N.cm mini
Mating life	500 Cycles mini
Weight	8,0000 g

MATERIAL INFORMATION

COMPONENTS	MATERIALS	PLATINGS (mm)
BODY	BRASS	NICKEL-2
GASKET	SILICON RUBBER	-
OTHERS PARTS	BRASS	NICKEL-2

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in