



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



**Nomenclature: SQUARE FLANGE JACK RECEPTACLE LIMITED-
DETENT EMI GASKET**


Page No.

1 of 1

STK-571921651236

**SQUARE FLANGE JACK RECEPTACLE LIMITED-
DETENT EMI GASKET**

OUTLINE DRAWING

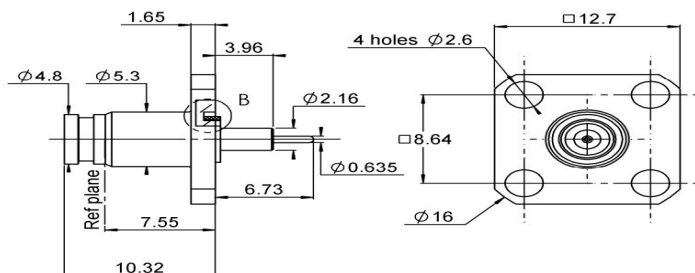

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-12 GHz
VSWR	$1.2 + 0.0000 \times F(\text{GHz})$ Maxi
Insertion loss	$0.12 \sqrt{F(\text{GHz})}$ dB Maxi
RF leakage	- (90 - F(GHz)) dB Max
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	-65/+165 ° C
-----------------------	--------------

MECHANICAL INFORMATION

Mating End	6.7 N mini
Opposite end	6.7 N mini
Panel nut	N.cm
Mating life	500 Cycles mini
Weight	2,7100 g

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)			
BODY		BRASS			GOLD 1.3 OVER NICKEL 2			
CENTER CONTACT		BERYLLIUM COPPER			GOLD 1.3 OVER NICKEL 1.3			
OUTER CONTACT		BERYLLIUM COPPER			NPGR			
INSUATOR		PTFE			-			
GASKET		CONDUCTIVE SILICONE LOADED						
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in