



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: STRAIGHT PLUGS CRIMP TYPE, FOR FLEXIBLE CABLES


Page No.

1 of 1

STK-571123311263

STRAIGHT PLUGS CRIMP TYPE, FOR FLEXIBLE CABLES

OUTLINE DRAWING

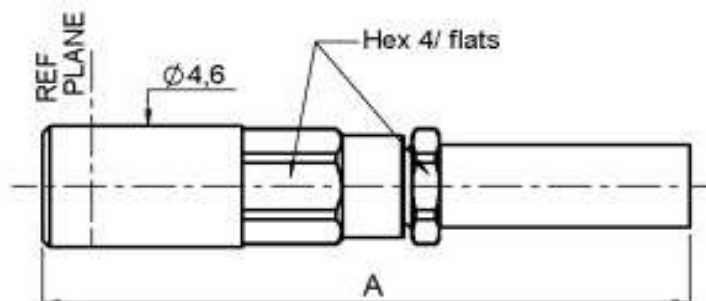

TECHNICAL DATA

ELECTRICAL DATA

Insertion Loss	0.3√F (GHz)
RF Leakage	< -55 dB at 1 GHz
VSWR	1.20 + 0.02F (GHz)
Contact Resistance	5mΩ max. Outer Contact: 1mΩ max
Insulation Resistance	1000MΩ
Voltage in VRMS	< 250V

ENVIRONMENTAL INFORMATION

Operation temperature	65°C ~ 165°C
Vibration	MIL-STD-202, Method 204, Condition D (20g)
Shock	Method 213, Condition B, 75g-6ms 1/2 sinus
Corrosion (Salt Mist)	MIL-STD-202, Method 101, Condition B (48h)

MECHANICAL INFORMATION

Cable Retention Force	50N - RG316: 100N
Mating Endurance	500
Center Contact Force	≥ 8 N

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)		
Body		Brass			Gold		
Contacts		Beryllium Copper			Gold		
Insulators		PTFE			-		
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.01.26	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in