



STK SERIES CONNECTOR



Page No.



1 of 1

Nomenclature: CONN NANO HEX.

STK-571123941278

CONN NANO HEX.

OUTLINE DRAWING

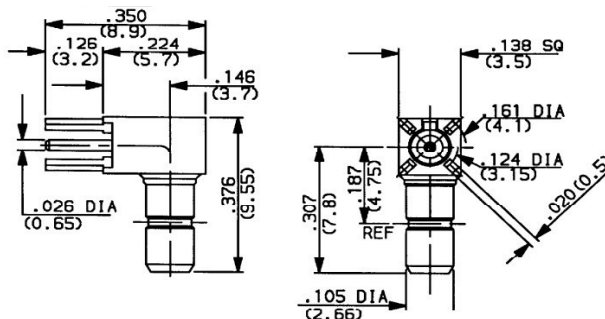

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-4 GHz
VSWR	NA
Insertion loss	NA
RF leakage	NA
Voltage rating	250 Vrms Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	1000 M Ω mini

ENVIRONMENTAL INFORMATION

Operation temperature	65°C ~ 165°C
-----------------------	--------------

MECHANICAL INFORMATION

Mating end	2.0 Lb Mini
Opposite end	2.0 Lb Mini
Mating life	NA
Weight	NA

MATERIAL INFORMATION

COMPONENTS		MATERIALS			PLATINGS (mm)			
BODY		BRASS			GOLD			
CENTER CONTACT		BRASS			GOLD			
OUTER CONTACT		BERYLLIUM COPPER			GOLD			
INSULATOR		PTFE			-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in